


# PROCOMM PLUS

*Intuitive Communications*

*Aspect Script  
Language*

*Reference Manual*



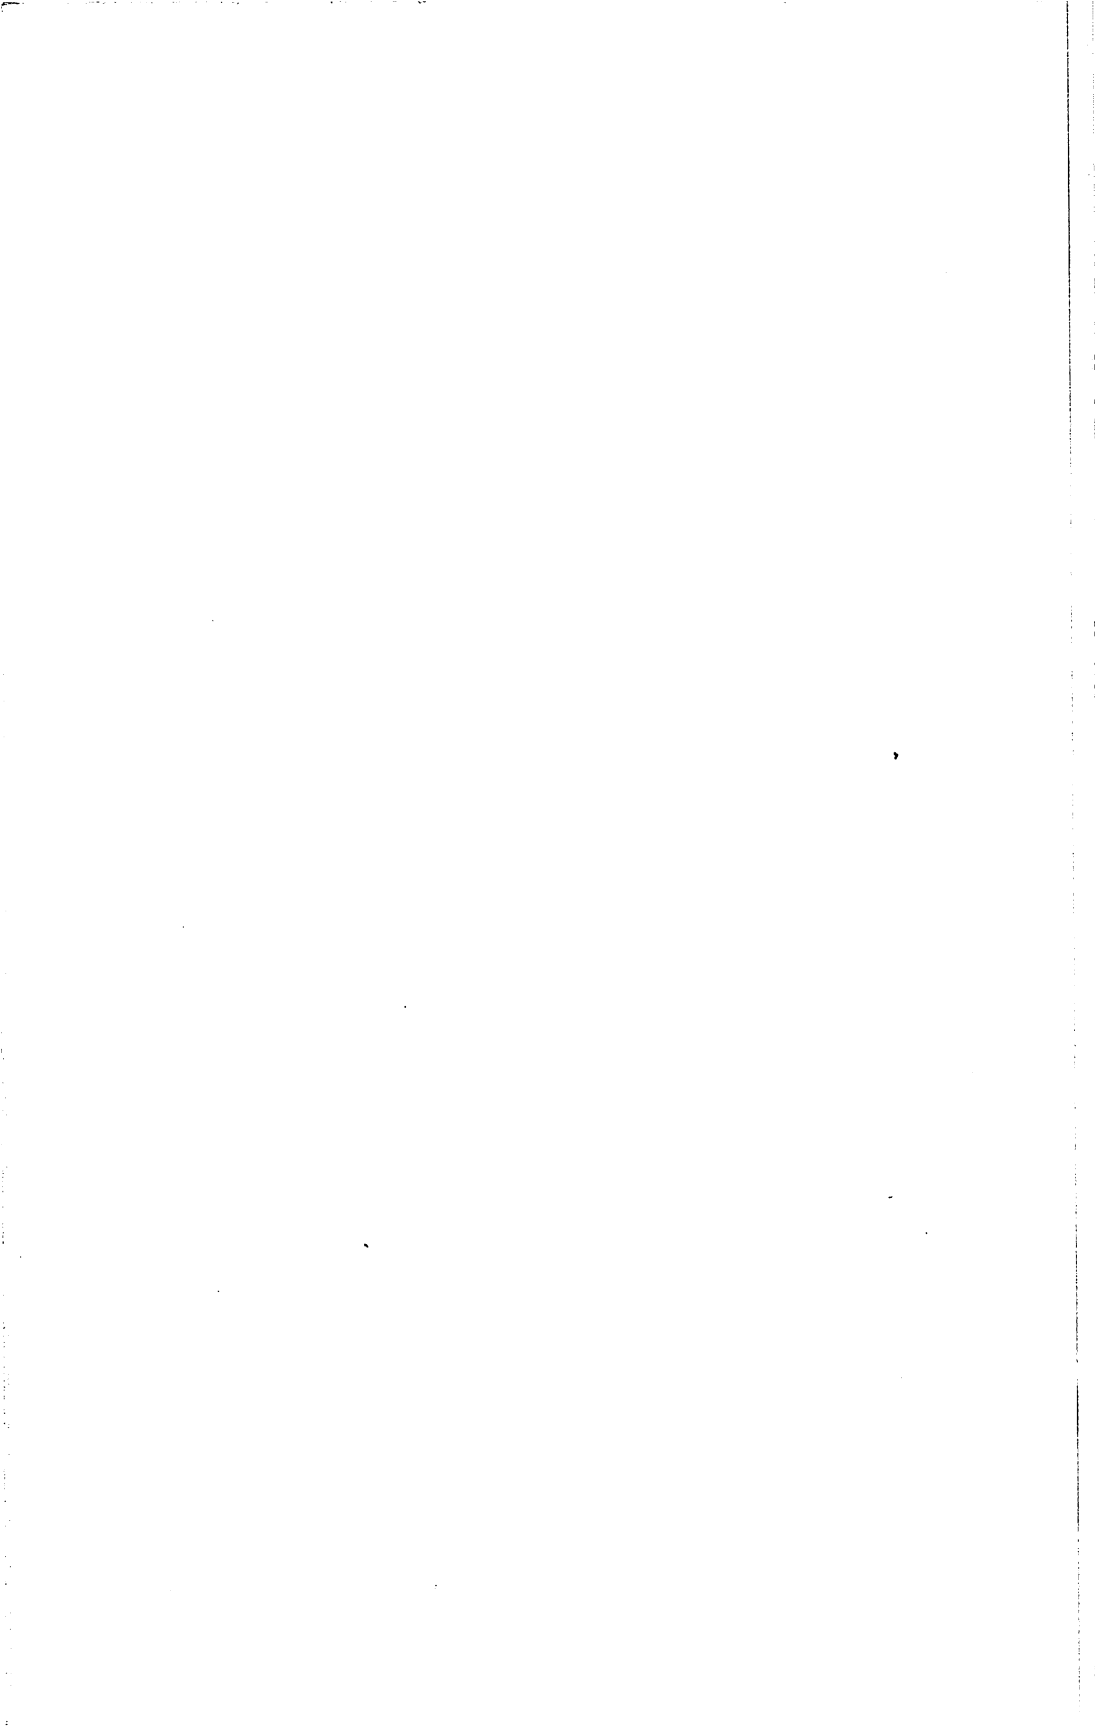

# *PROCOMM<sup>®</sup> PLUS*

---

## **ASPECT Script Language Reference Manual**

January 1991

© 1987/1990 DATASTORM TECHNOLOGIES, INC. All rights reserved.

No part of this manual may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language (natural or computer), in any form or by any means, without the prior written permission of DATASTORM TECHNOLOGIES, INC.

You are granted a limited license to use the software described in this manual. The software may be used or copied only in accordance with the terms of that license, which is described beginning on the next page.

Information in this manual is subject to change without notice and does not represent a commitment on the part of DATASTORM TECHNOLOGIES, INC.

DATASTORM TECHNOLOGIES, INC., may make improvements and/or changes in this manual and/or in PROCOMM PLUS at any time.

PROCOMM, PROCOMM PLUS, the PROCOMM PLUS "wavy line design" logo, Intuitive Communications, DATASTORM and the DATASTORM logo are registered trademarks of DATASTORM TECHNOLOGIES, INC. The File Name Clipboard is a trademark of DATASTORM TECHNOLOGIES, INC.

Throughout this manual are commercial names of products made by other manufacturers or developers. Many of these product names are either registered or unregistered trademarks of their manufacturers or developers. The owners of these trademarks have never expressed any approval or disapproval of DATASTORM products.

**DATASTORM's Technical Support Department will be happy to answer questions about the use or syntax of any ASPECT command or feature. We cannot, however, offer advice on how to write or debug your scripts. We have tried to include as many programming hints and examples as possible in the ASPECT SCRIPT LANGUAGE REFERENCE MANUAL, and we will continue to supply a wide variety of sample scripts both on CompuServe and on our in-house BBS.**



# Contents

---

<b><i>Chapter 1: Introduction</i></b>	<b><i>1</i></b>
Overview .....	2
ASPECT Command Words and Their Uses .....	3
<i>Branching</i> .....	3
<i>Program Control</i> .....	3
<i>String Manipulation</i> .....	4
<i>Input/Output</i> .....	5
<i>Terminal Key Equivalents</i> .....	7
<i>Display and Sound</i> .....	8
<i>Directory and File Control</i> .....	9
<i>Conversion Commands</i> .....	10
<i>Arithmetic Commands</i> .....	10
<i>Memory Manipulation</i> .....	12
<i>System, Date and Time Commands</i> .....	12
<i>Terminal Emulation Commands</i> .....	12
<i>Miscellaneous Commands</i> .....	13
Using ASPCOMP .....	14
<i>Running Compiled Scripts</i> .....	15
<i>Key Processing in ASPECT</i> .....	16
 <b><i>Chapter 2: ASPECT Script Reference</i></b>	 <b><i>17</i></b>
Overview .....	23
The Elements of ASPECT .....	24
<i>Naming Elements in ASPECT</i> .....	24
<i>Command Words and Parameters</i> .....	25
<i>Operators</i> .....	26
<i>Predefined Variables</i> .....	26
<i>System Variables</i> .....	26
<i>User-defined Variables</i> .....	27
<i>User-defined Constants</i> .....	27
<i>Global and Local Variables</i> .....	28
<i>Escape Sequences</i> .....	28

Character Constants.....	29
Labels and Procedures .....	29
ASPECT Conventions.....	30
A Note on Examples.....	34
Using Remote ASPECT Commands.....	34
The ASPECT Command Listing .....	35
System Variables .....	190
<b><u>Chapter 3: Compiling ASPECT</u></b>	<b>195</b>
Overview .....	196
ASPCOMP Technical Notes .....	197
The Compiling Process.....	197
Using a Symbol Map and Line Reference .....	197
Upgrading Scripts from PROCOMM PLUS 1.x.....	198
Using CONVERT .....	198
Writing Scripts for Efficiency .....	203
<b><u>Chapter 4: Common ASPECT Questions</u></b>	<b>209</b>
Overview .....	210
ASPECT Variables.....	211
File Input/Output .....	213
Display .....	214
Connecting to a Remote System .....	215
Accessing DOS.....	216
Transferring Files .....	217
Debugging.....	217
<b><u>Chapter 5: Advanced ASPECT Examples</u></b>	<b>219</b>
Overview .....	220
Remote Commands and String Manipulation.....	220
Host Mode External Processing and File I/O.....	221
<b><u>Appendixes</u></b>	<b>227</b>
Appendix A: PCEDIT Technical Notes .....	229
Appendix B: Compiler and Run-Time Errors .....	233
Appendix C: Reserved Words .....	243
Appendix D: Operators .....	251
<b><u>Index</u></b>	<b>253</b>

# Introduction

---

Overview .....	2
ASPECT Command Words and Their Uses .....	3
<i>Branching</i> .....	3
<i>Program Control</i> .....	3
<i>String Manipulation</i> .....	4
<i>Input/Output</i> .....	5
<i>Terminal Key Equivalents</i> .....	7
<i>Display and Sound</i> .....	8
<i>Directory and File Control</i> .....	9
<i>Conversion Commands</i> .....	10
<i>Arithmetic Commands</i> .....	10
<i>Memory Manipulation</i> .....	12
<i>System, Date and Time Commands</i> .....	12
<i>Terminal Emulation Commands</i> .....	12
<i>Miscellaneous Commands</i> .....	13
Using ASPCOMP .....	14
<i>Running Compiled Scripts</i> .....	15
<i>Key Processing in ASPECT</i> .....	16

## Overview

---

This book was specifically designed as a companion to the PROCOMM PLUS USER MANUAL; it assumes that you already have experience in programming, and therefore does not attempt to teach the basics of writing a program. You'll find basic information on ASPECT and how to apply it in your USER MANUAL.

Instead, this reference provides the ASPECT programmer with detailed information on each script component and the ASPCOMP compiler. For your convenience, each chapter handles a separate topic:

The rest of this chapter arranges the ASPECT command words into functional "groups"—a group contains commands with similar functions, syntax or usage. Additionally, we'll briefly introduce the PROCOMM PLUS script compiler.

**Chapter 2** is an alphabetized description of each command. We'll also cover the basic syntax and conventions of an ASPECT script.

**Chapter 3** provides more details on using the compiler—in particular, how to upgrade scripts you've written for earlier versions of PROCOMM PLUS.

**Chapter 4** presents the most commonly-asked ASPECT questions. We'll provide possible solutions and example scripts that you can include in your own programming.

**Chapter 5** is devoted to the expert ASPECT user! This chapter presents two advanced script examples (demonstrating external Host programming and remote commands).

Finally, at the back of the manual you'll find complete technical information (including error messages, the PCEDIT text editor and a complete ASPECT index).

You'll notice that each chapter begins with an *Overview* (like this one), which will introduce the topics to be discussed and the purpose of that chapter. Use these "road signs" to identify both the chapters you need to read and those that you can skip.

## ASPECT Command Words and Their Uses

---

The most commonly-used ASPECT commands are listed below, grouped according to function. You'll find complete details about *every* command in Chapter 2 of this manual.

### Branching

<b>CALL</b>	Passes control to another procedure; control returns to the subsequent command.
<b>EXECUTE</b>	Passes control to another script file, but doesn't allow a return.
<b>GOSUB</b>	A synonym for <b>CALL</b> .
<b>GOTO</b>	Provides an unconditional branch or jump to a label within the current procedure.
<b>LONGJMP</b>	Returns control directly to a location previously "marked" with the <b>SETJMP</b> command.
<b>SETJMP</b>	Creates a location within a program that can be returned to immediately with the <b>LONGJMP</b> command.

### Program Control

<b>BYE</b>	Terminates the executing script file and exits PROCOMM PLUS (leaving the connection open).
<b>CWHEN</b>	Deactivates an active <b>WHEN</b> command.
<b>DEFINE</b>	Substitutes a text string or allows conditional processing during compilation.
<b>EXIT</b>	Exits the script file and returns to Terminal mode.
<b>FOR</b>	Repeats a command or series of commands (up to the <b>ENDFOR</b> command) a specified number of times.
<b>IF</b>	Defines command execution (up to the <b>ENDIF</b> command) as dependent on a specified condition or event.

<b>MSPAUSE</b>	Halts execution for a specified number of milliseconds.
<b>PAUSE</b>	Halts execution for a specified number of seconds.
<b>PROC</b>	Marks the beginning of an ASPECT procedure block (which is terminated with an <b>ENDPROC</b> command).
<b>QUIT</b>	Terminates a script and exits from <b>PROCOMM PLUS</b> .
<b>SWITCH</b>	Executes commands on the results of comparisons between a variable and a series of <b>CASE</b> values.
<b>SUSPEND UNTIL</b>	Halts script execution until a given time.
<b>TERMINAL</b>	Terminates a script and returns the system to Terminal mode.
<b>WAITFOR</b>	Halts execution until a specified string is received or until a specified length of time elapses.
<b>WAITQUIET</b>	Halts execution for a specified time until the receive data line has been inactive for a certain number of seconds.
<b>WHEN</b>	Forces an automatic response or <b>CALLs</b> a procedure when a particular target string is encountered.
<b>WHILE</b>	Repeats a block of commands (terminated with an <b>ENDWHILE</b> command) until a condition is "FALSE".

## String Manipulation

<b>ASSIGN</b>	Assigns a text string or another string variable to a string variable.
<b>FIND</b>	Tests for an occurrence of the specified text within a variable.
<b>RSTRCMP</b>	Compares two strings and sets the <b>SUCCESS</b> flag to "TRUE" if the strings are identical. Unlike <b>STRCMP</b> , the strings can contain non-displayable characters.
<b>STRCAT</b>	Concatenates one string variable or quoted string to another string variable.
<b>STRCMP</b>	Compares two strings and sets the <b>SUCCESS</b> flag to "TRUE" if the strings are identical.



<b>STRCPY</b>	Assigns a string variable or quoted string to another string variable. This command is the same as <b>ASSIGN</b> .
<b>STRFMT</b>	Creates a formatted string using a template and modifies it with string or numeric variables.
<b>STRLEN</b>	Returns the length of a string or string variable into an integer variable.
<b>STRLWR</b>	Converts the contents of a string variable to all lowercase characters.
<b>STRPEEK</b>	Reads a byte in a string and places it in a specified integer variable.
<b>STRPOKE</b>	Sets a byte in a string to a specified value.
<b>STRSET</b>	Initializes a string variable with a specified value (between 0 and 255) up to a designated length.
<b>STRUPDT</b>	Overwrites one or more bytes in a string with a new string value.
<b>STRUPR</b>	Converts the contents of a string variable to all uppercase characters.
<b>SUBSTR</b>	Extracts a new string from an existing quoted string or a string variable.

## **Input/Output**

<b>ATGET</b>	Gets a string or numeric value using specified attributes at a specified row and column.
<b>ATSAY</b>	Displays a string or number in the specified colors at a location on the screen.
<b>COMGETC</b>	Assigns a numeric variable with the next character in the receive data buffer. Returns a "-1" if the buffer is empty.
<b>COMGETCD</b>	Similar to <b>COMGETC</b> , this command will wait up to two seconds for a character before returning a value.
<b>COMPUTC</b>	Sends the specified character out the active communications port.
<b>EOF</b>	Tests for end-of-file condition.
<b>FATSAY</b>	Displays a formatted string at the specified location and with the specified color attributes.

<b>FCLEAR</b>	Clears all end-of-file and error flags for the input file.
<b>FCLOSE</b>	Closes a file.
<b>FFLUSH</b>	Writes the current I/O buffer contents to the output file.
<b>FGETC</b>	Reads a character from input file into an integer variable.
<b>FGETS</b>	Reads a string from input file into a variable.
<b>FOPEN</b>	Opens a file in read, write or append mode and assigns it to a file index.
<b>FPUTC</b>	Writes the character represented by an integer to the output file.
<b>FPUTS</b>	Writes the contents of a string variable to the output file.
<b>FREAD</b>	Reads a block of data from the input file into a string variable.
<b>FSEEK</b>	Repositions the file pointer.
<b>FSTRFMT</b>	Similar to <b>STRFMT</b> and <b>FATSAY</b> ; writes a formatted string to the output file.
<b>FTELL</b>	Returns the current file position into a long variable.
<b>FWRITE</b>	Writes a block of data from a string to the output file.
<b>GET</b>	Stores the user input in a string variable.
<b>INPORT</b>	Reads data from a specified I/O port into an integer variable.
<b>KEYGET</b>	Reads a keystroke and optionally places the value into a numeric integer variable.
<b>KFLUSH</b>	Clears the keyboard buffer.
<b>MATGET</b>	Positions the cursor at a row and column and gets a string or numeric value using the specified attributes; the input is masked with asterisks on the screen.
<b>MESSAGE</b>	Displays a specified string on the local screen at the current cursor position.
<b>MGET</b>	Stores user input in a string or numeric variable. The display is masked with asterisks to provide security.
<b>OUTPORT</b>	Writes integer data to a specified I/O port.

<b>PUSHBACK</b>	"Pushes" the last character read from the receive data buffer back to the head of the buffer.
<b>REWIND</b>	Repositions the file pointer back to the beginning of the file and clears the end-of-file and error flags for the file.
<b>RDFLUSH</b>	Clears the Redisplay buffer.
<b>RFLUSH</b>	Clears the receive data buffer.
<b>RGET</b>	Receives a text string sent by a remote user and stores it in a string variable.
<b>RDWRITE</b>	Writes the Redisplay buffer to disk.
<b>TERMWRT</b>	Displays the character represented by a value at the current cursor position and then moves the cursor to the next available location. Unlike <b>WRITEC</b> , no conversion is performed on the value.
<b>TRANSMIT</b>	Sends the specified string to a remote computer.
<b>WRITEC</b>	Performs emulation conversion and then displays or acts on the provided character value. The cursor is updated when appropriate.

## Terminal Key Equivalents

<b>BREAK</b>	Sends a break of specified length to a remote computer.
<b>CONNECT</b>	Exits a script and returns to Terminal mode.
<b>DIAL</b>	Dials a dialing directory entry.
<b>DLOAD</b>	Loads a different dialing directory.
<b>EMULATE</b>	Sets the terminal type of the local system.
<b>FETCH</b>	Returns the current value of any <b>SET</b> command parameter.
<b>GETFILE</b>	Receives a file from a remote computer using the specified protocol.
<b>HANGUP</b>	Disconnects the line, ending a call.
<b>HELP</b>	Calls the Online Help Facility.
<b>HOST</b>	Enters Host Mode, where <b>PROCOMM PLUS</b> acts as a BBS.
<b>KERMSERVE</b>	Executes the specified <b>KERMIT</b> server command.
<b>KLOAD</b>	Loads or creates a Keymap file.

<b>LOG</b>	Enables logging of all data sent and received in Terminal mode to a disk file.
<b>METAKEY</b>	Executes the specified keyboard Meta key.
<b>MDIAL</b>	Dials a specified telephone number (unlike DIAL, which calls a Dialing Directory entry).
<b>MLOAD</b>	Loads or creates a keyboard Meta key file.
<b>PARMREST</b>	Restores the PROCOMM PLUS parameter settings from the PCPLUS.PRM file.
<b>PARMSAVE</b>	Saves the current parameter settings to the PCPLUS.PRM file (overwriting the previous settings).
<b>PRINTER</b>	Turns the printer on or off.
<b>REDIAL</b>	Redials numbers in the dialing queue.
<b>SET</b>	Sets the specified parameter to a specific value.
<b>SENDFILE</b>	Sends a file to a remote computer using the specified protocol.
<b>SNAPSHOT</b>	Copies the contents of the current screen to the disk file PCPLUS.SCR.
<b>TERMKEY</b>	Accepts a value representing a key and performs a program function.

## Display and Sound

<b>ALARM</b>	Sounds an alarm for a specified number of seconds.
<b>BOX</b>	Displays a bordered box of the specified size and color.
<b>CLEAR</b>	Clears the screen.
<b>CUROFF</b>	Turns the cursor off.
<b>CURON</b>	Turns the cursor on.
<b>DSCROLL</b>	Scrolls a specified area of the screen down by the specified number of lines.
<b>GETCUR</b>	Returns the cursor's current row and column into numeric variables.
<b>GETVATTR</b>	Returns the current display attribute from the specified screen coordinates into a numeric variable.
<b>GETVCHAR</b>	Returns the current character from the specified screen coordinates into a numeric variable.

<b>LOCATE</b>	Places the cursor at a specific location.
<b>PUTVATTR</b>	Selects the current display attribute for the specified screen coordinates.
<b>PUTVCHAR</b>	Places a character at the specified screen coordinates.
<b>SCROLL</b>	Scrolls a specified area of the screen up by the specified number of lines.
<b>SOUND</b>	Makes a sound of a given frequency (in Hertz) and duration (in hundredths of a second).
<b>TYPE</b>	Displays the specified ASCII text file.
<b>VIDREST</b>	Restores the current video buffer data.
<b>VIDSAVE</b>	Saves the current video buffer data.

## **Directory and File Control**

<b>CHDIR</b>	Changes the current DOS directory.
<b>DELETE</b>	Erases a file.
<b>DIR</b>	Displays a list of files.
<b>DISKFREE</b>	Returns the free space available on the specified drive into a long variable.
<b>FINDFIRST</b>	Locates a file (or files) with a file specification you provide.
<b>FINDNEXT</b>	Locates the next occurrence of a file which matches a previous <b>FINDFIRST</b> command.
<b>GETDIR</b>	Returns the current working directory path of the specified drive into a string variable.
<b>GETFATTR</b>	Returns the attributes of a specified file into a string variable.
<b>GETFDATE</b>	Returns the date stamp of a specified file into a string variable.
<b>GETFSIZE</b>	Returns the size (in bytes) of a specified file into a long variable.
<b>GETFTIME</b>	Returns the time stamp of a specified file into a string variable.
<b>ISFILE</b>	Determines if a file is present in the current DOS directory.
<b>MKDIR</b>	Creates a new directory using a specified path (or in the current directory if a path is not provided).

<b>RENAME</b>	Renames an existing file using specified paths (or the current directory). Files can be "moved" by renaming them to a different directory on the same drive.
<b>RMDIR</b>	Removes an existing directory using a specified path (or in the current directory if a path is not provided).
<b>SETFATTR</b>	Sets the attributes of a specified file.
<b>SETFDATE</b>	Sets the date stamp of a specified file.
<b>SETFTIME</b>	Sets the time stamp of a specified file.

### Conversion Commands

<b>ATOF</b>	Converts an ASCII numeric string to a float value.
<b>ATOI</b>	Converts an ASCII numeric string to an integer value.
<b>ATOL</b>	Converts an ASCII numeric string to a long value.
<b>FTOA</b>	Converts a float to an ASCII string and stores it in a string variable.
<b>ITOA</b>	Converts an integer to an ASCII string and stores it in a string variable.
<b>KEY2ASCII</b>	Converts an integer to its ASCII character value and places the result into a string variable.
<b>LTOA</b>	Converts a long to an ASCII string and stores it in a string variable.

### Arithmetic Commands

<b>ADD</b>	Adds two numbers or numeric variables and places the result in a numeric variable.
<b>AND</b>	Performs a bitwise comparison of two numbers and places the result in the specified numeric variable.
<b>ANDL</b>	Performs a logical AND comparison of two numbers and places the result in the specified numeric variable.
<b>CEIL</b>	Computes the smallest integer value <i>greater than or equal to</i> a floating point number you provide.



COMP	Performs a bitwise complement of a number and places the result in the specified numeric variable.
DEC	Decrements a numeric variable by one.
DIV	Divides one number by another and places the result in a numeric variable.
EQ	Performs equality test on two numbers.
FLOOR	Computes the largest integer value <i>less than or equal to</i> a floating point number you provide.
GE	Performs a greater-than-or-equal-to comparison.
GT	Performs a greater-than comparison.
INC	Increments a numeric variable by one.
INIT	Sets the value of a specified numeric variable.
LE	Performs a less-than-or-equal-to comparison.
LT	Performs a less-than comparison.
MOD	Returns the remainder left after the division of two numbers into a numeric variable.
MUL	Multiplies two numbers or numeric variables and store the result in a numeric variable.
NEG	Negates the value of the specified number and places the result in a numeric variable.
NEQ	Performs inequality test on two numbers.
NOT	Performs a logical NOT operation on a number.
OR	Performs a bitwise comparison of two numbers.
ORL	Performs a logical OR comparison on two numbers.
SHL	Performs a left shift operation on the bits of one number and places the result in the specified numeric variable.
SHR	Performs a right shift operation on the bits of one number and places the result in the specified numeric variable.
SUB	Subtracts one number or numeric variable from another and store the result in a numeric variable.
XOR	Performs a bitwise comparison of two numbers.

**ZERO**                      Compares a number with zero.

## Memory Manipulation

**MEMFREE**                Returns the free RAM available for running other programs into a long variable.

**MEMPEEK**               Returns the value of a single byte at the specified segment address and offset.

**MEMPOKE**               Sets the value of a single byte at the specified segment address and offset.

**MEMREAD**               Places the values of several bytes at the specified memory segment address and offset into the specified string variable.

**MEMWRITE**              Writes the contents of a string at the specified memory segment address and offset.

## System, Date and Time Commands

**DATE**                    Loads current system date into a string variable.

**DOS**                     Executes the specified DOS command or batch file.

**DOSVER**                Returns the current DOS version (with major and minor version numbers) into a string variable.

**GETENV**                Reads the contents of an environment variable definition into a string variable.

**HOOK**                   Executes an external program, passing the segment and offset of the current PROCOMM PLUS Setup structure as an argument.

**PUTENV**                Adds or modifies an environment variable.

**RUN**                     Executes the specified program or command.

**SHELL**                  Temporarily exits to DOS (leaving PROCOMM PLUS loaded in memory).

**TIME**                    Loads the current system time into a string variable.

## Terminal Emulation Commands

**BLANKON**                Sets the foreground equal to the background attribute.

**BLINKON**               Turns on the blinking attribute.

**BOLDON**                Turns on the bold attribute.

**CURDN**                 Moves the cursor down one line.

<b>CURLF</b>	Moves the cursor one column to the left.
<b>CURRT</b>	Moves the cursor one column to the right.
<b>CURUP</b>	Moves the cursor up one line.
<b>DELCHAR</b>	Deletes the character at the current cursor position.
<b>DELLINE</b>	Deletes the entire line at the current cursor position.
<b>DIMON</b>	Turns on the dim attribute.
<b>EBOL</b>	Erases text from the current cursor position to the beginning of the line.
<b>EBOS</b>	Erases text from the current cursor position to the beginning of the screen.
<b>EEOL</b>	Erases the line under the current cursor position.
<b>EEOS</b>	Erases text from the current cursor position to the end of the screen.
<b>HOME</b>	Moves the cursor to the first row and column on the screen.
<b>INSCHAR</b>	Inserts a character at the current cursor position.
<b>INSLINE</b>	Inserts a new line at the current cursor position.
<b>LINEFEED</b>	Moves the cursor down one line.
<b>NORMON</b>	Turns on the normal attribute.
<b>RCA</b>	Interprets the next two received characters as row and column positions for the cursor.
<b>REVON</b>	Turns on the reverse attribute.
<b>TERMRESET</b>	Resets Terminal mode.
<b>ULINEON</b>	Turns on the underline attribute.

### **Miscellaneous Commands**

<b>COMMENT</b>	Designates the beginning of a comment block. Any characters from this command to the <b>ENDCOMMENT</b> command following it will not be included in the compiled code.
<b>ENDCOMMENT</b>	Terminates a <b>COMMENT</b> block.
<b>INCLUDE</b>	Merges commands from other source files during compilation.

## Using ASPCOMP

---

Like many other programming languages, ASPECT allows you to “compile” your programs.

During this process, the commands, data and text contained in an ASPECT Source Program (or .ASP file) are reduced from their full-length English format into code that PROCOMM PLUS can read directly. Strings are also encrypted for security.

After compiling, the resulting ASPECT Script Executable (or .ASX file) is smaller in size and takes less time to run. Additionally, since the string data is encrypted, it’s much more secure—no one can read sensitive passwords or information!

You can compile a script in two ways:

- First, you can compile scripts ahead-of-time, before running PROCOMM PLUS. This method is faster, and it requires less memory. However, if you make frequent changes to a script, you’ll have to recompile each time you modify it.
- Alternately, PROCOMM PLUS can automatically load the compiler and attempt to compile the script when you run it. This method is more convenient for those users who modify their scripts often, since the intermediate compile step is automatic; however, if PROCOMM PLUS doesn’t have enough free RAM memory to load ASPCOMP, the compile process will abort.

Whenever PROCOMM PLUS prompts you for a script name, you can “force” it to recompile a source program by typing in the entire script name (including the .ASP extension). If the script name has no extension, PROCOMM PLUS will attempt to execute a compiled script with that name first; if no such script exists, PROCOMM PLUS assumes that the file is a source program (which must be compiled before execution).

You can run ASPCOMP from the DOS prompt:

- Type `ASPCOMP [options] scriptname` and press **Enter**.

The *scriptname* can include a path.

The options are:

<code>/Dx[=text]</code>	Defines a macro <i>x</i> . This symbol can also be initialized to a text string (similar to a macro in the “C” programming language). For more information on ASPECT macros and their uses, refer to the <b>DEFINE</b> command in the next chapter.
-------------------------	---

<b>/M[L]</b>	Generates a symbol map for this script (including any compiler warning messages). The <i>L</i> switch creates an additional source line number reference table.
<b>/En</b>	Determines the maximum errors to allow before aborting the compilation; if more than <i>n</i> errors are found by ASPCOMP, it will abort automatically. The default is 20 errors.
<b>/Wn</b>	Specifies the warning level for this compilation; warnings may indicate a potential problem in the source script. Unlike errors, however, warnings aren't considered "fatal"; the compiling process will not abort because of a warning. Valid values are 0, 1 and 2. At level 0, ASPCOMP suppresses all warning messages. At level 1 (the default), unreferenced global, local and parameter variables are reported. Level 2 reports all level 1 errors and additionally reports the names of "unreferenced" procedures as they're removed by the compiler (unreferenced procedures aren't <b>CALLed</b> anywhere within the source script, so they're effectively useless).

Spaces are required between options.

## Running Compiled Scripts

To illustrate the use of ASPCOMP, let's create a simple ASPECT source program in the PCPLUS directory called "*TINY.ASP*"—its sole purpose is to display the sentence "*Hello, I'm a compiled ASPECT script!*" in the center of your screen. Our *TINY.ASP* looks like this:

```
PROC MAIN           ;initialize the MAIN procedure
  CLEAR             ;clear the screen
  FATSAY 12 20 31 "Hello, I'm a compiled ASPECT script!"
ENDPROC             ;end the MAIN procedure
```

Now we'll compile and run *TINY.ASP* from within PROCOMM PLUS. From Terminal mode, the process would be:

- Press **[Alt]-[F5]** to run a script.
- PROCOMM PLUS prompts you for the name of the script—enter *TINY* and press **[Enter]**.

Since there is no file named "*TINY.ASX*", PROCOMM PLUS assumes that the script is in source program form (and that it must be compiled before use). You'll see a message alerting you that the script is being compiled, and then the new *TINY.ASX* will run.

Once you exit from PROCOMM PLUS, you'll note that TINY.ASX was saved as a separate file.

To compile TINY.ASP outside of PROCOMM PLUS, the process (from the DOS prompt) would be:

- Type *ASPCOMP TINY* and press **Enter**.

Whichever method you use to compile TINY.ASX, you'll notice that it's smaller than TINY.ASP by several bytes (of course, the larger the source program, the more bytes you'll save by compiling it). If you view TINY.ASX within PROCOMM PLUS, you'll also see that it's now tokenized (making it impossible for someone else to "decode" any of the data strings within TINY.ASX).

## Key Processing in ASPECT

PROCOMM PLUS allows you to enter keystrokes while a script is executing. By default, the program checks for an available key before each command is executed; if **Esc** was pressed, PROCOMM PLUS asks you whether or not to terminate the current script. Any other key will be processed exactly as if it were typed in Terminal mode; for example, if you press **PgUp**, the Upload Protocol window is displayed. If the letter **A** is pressed, it's sent out the active COM port.

Certain ASPECT commands can be terminated by **Esc**; they require a period of time to pass before the command would normally complete (for example, **PAUSE**, **RGET**, **SUSPEND UNTIL**, **WAITFOR** and **WAITQUIET**). The GET-style commands (**ATGET**, **GET**, **MATGET** and **MGET**) can also be aborted by **Esc**. When any of these commands are terminated with **Esc**, the **FAILURE** flag is set and PROCOMM PLUS asks you whether or not to terminate the current script.

The **SET KEYS** command can be set **ON** to change the way keys are processed in a script. **Esc** will still terminate some commands (as mentioned above); however, the termination prompt is suppressed, and it's the script's responsibility to process both the abnormal termination of commands and keystrokes entered by the user. You can use commands like **KEYGET** and **TERMKEY** to monitor this processing.

The next chapter will describe each ASPECT command in-depth, along with the basic syntax and conventions used by ASPECT programmers.



# ASPECT Script Reference

---

Overview .....	23
The Elements of ASPECT .....	24
<i>Naming Elements in ASPECT</i> .....	24
<i>Command Words and Parameters</i> .....	25
<i>Operators</i> .....	26
<i>Predefined Variables</i> .....	26
<i>System Variables</i> .....	26
<i>User-defined Variables</i> .....	27
<i>User-defined Constants</i> .....	27
<i>Global and Local Variables</i> .....	28
<i>Escape Sequences</i> .....	28
<i>Character Constants</i> .....	29
<i>Labels and Procedures</i> .....	29
ASPECT Conventions .....	30
<i>A Note on Examples</i> .....	34
Using Remote ASPECT Commands .....	34
ADD .....	35
ALARM .....	36
AND .....	36
ANDL .....	37
ASSIGN .....	37
ATGET .....	38
ATOF .....	39
ATOL .....	39
ATOL .....	40
ATSAY .....	41
BLANKON .....	41
BLINKON .....	41
BOLDON .....	42
BOX .....	42
BREAK .....	43
BYE .....	43
CALL .....	44

CASE .....	45
CEIL.....	45
CHDIR .....	46
CLEAR .....	46
COMGETC .....	47
COMGETCD .....	47
COMMENT .....	48
COMP .....	48
COMPUTC .....	49
CONNECT .....	49
CURDN.....	49
CURLF .....	50
CUROFF .....	50
CURON.....	50
CURRT.....	50
CURUP .....	51
CWHEN.....	51
DATE.....	52
DEC .....	52
DEFAULT .....	52
DEFINE.....	53
DELETE .....	54
DELCHAR.....	55
DELLINE .....	55
DIAL.....	55
DIMON .....	56
DIR.....	57
DISKFREE .....	57
DIV .....	58
DLOAD.....	58
DOS .....	59
DOSVER .....	60
DSCROLL.....	61
EBOL .....	61
EBOS.....	62
EEOL .....	62
EEOS.....	62
ELSE .....	63
\$ELSE .....	63
ELSEIF.....	63
\$ELSEIF.....	64
EMULATE.....	64
ENDCASE .....	65
ENDCOMMENT .....	65
ENDFOR.....	66

ENDIF .....	66
\$ENDIF .....	66
ENDPROC.....	66
ENDSWITCH.....	67
ENDWHILE .....	67
EOF.....	67
EQ .....	68
ERRORMSG .....	68
EXECUTE .....	69
EXIT.....	70
EXITFOR.....	71
EXITSWITCH.....	71
EXITWHILE .....	71
FATSAY .....	71
FCLEAR.....	75
FCLOSE .....	76
FETCH .....	76
FFLUSH .....	78
FGETC.....	78
FGETS .....	79
FIND.....	79
FINDFIRST.....	81
FINDNEXT.....	82
FLOAT .....	83
FLOATPARM .....	84
FLOOR.....	85
FOPEN .....	85
FOR.....	86
FPUTC.....	87
FPUTS .....	87
FREAD .....	88
FSEEK.....	88
FSTRFMT.....	89
FTELL.....	90
FTOA.....	90
FWRITE .....	91
GE .....	91
GET.....	92
GETCUR .....	93
GETDIR.....	93
GETENV .....	94
GETFATTR.....	94
GETFDATE .....	95
GETFILE .....	96
GETFSIZE.....	97

GETFTIME .....	98
GETVATTR .....	98
GETVCHAR .....	98
GOSUB .....	99
GOTO .....	99
GT .....	100
HANGUP .....	101
HELP .....	101
HOME .....	101
HOOK .....	102
HOST .....	102
IF .....	103
\$IFDEF .....	106
INC .....	106
INCLUDE .....	106
INT .....	107
INPORT .....	108
INSCHAR .....	108
INLINE .....	108
INTEGER .....	109
INTPARM .....	109
ISFILE .....	110
ITOA .....	110
KERMSEVE .....	111
KEY2ASCII .....	111
KEYGET .....	112
KFLUSH .....	112
KLOAD .....	113
LE .....	113
LINEFEED .....	114
LOCATE .....	114
LOG .....	115
LONG .....	116
LONGJMP .....	116
LONGPARM .....	117
LOOPFOR .....	118
LOOPWHILE .....	118
LT .....	118
LTOA .....	119
MATGET .....	119
MDIAL .....	120
MEMFREE .....	121
MEMPEEK .....	121
MEMPOKE .....	122
MEMREAD .....	122

MEMWRITE.....	123
MESSAGE.....	123
METAKEY.....	124
MGET .....	125
MKDIR.....	126
MLOAD .....	126
MOD.....	127
MSPAUSE.....	127
MUL .....	128
NEG.....	128
NEQ.....	129
NORMON .....	129
NOT.....	129
NULL .....	130
OR.....	130
ORL .....	131
OUTPORT .....	131
PARMREST.....	132
PARMSAVE.....	132
PAUSE .....	132
PRINTER .....	133
PROC.....	134
PUSHBACK .....	135
PUTENV .....	135
PUTVATTR.....	136
PUTVCHAR.....	136
QUIT.....	136
RCA.....	137
RDWRITE.....	137
REDIAL.....	138
RENAME.....	138
RETURN .....	139
REVON .....	139
REWIND.....	139
RFLUSH.....	140
RGET .....	140
RMDIR.....	141
RSTRCMP.....	142
RUN.....	142
SCROLL .....	144
SENDFILE .....	145
SET.....	146
SETFATTR.....	161
SETFDATE .....	161
SETFTIME .....	162

SETJMP .....	162
SHELL .....	163
SHL .....	164
SHR .....	165
SNAPSHOT .....	165
SOUND .....	166
STATMSG .....	166
STATREST .....	167
STRCAT .....	167
STRCMP .....	167
STRCPY .....	168
STRFMT .....	169
STRING .....	169
STRLEN .....	170
STRLWR .....	170
STRPARM .....	171
STRPEEK .....	171
STRPOKE .....	172
STRSET .....	172
STRUPDT .....	172
STRUPR .....	173
SUB .....	173
SUBSTR .....	174
SUSPEND UNTIL .....	175
SWITCH .....	175
TERMINAL .....	178
TERMKEY .....	179
TERMRESET .....	180
TERMWRT .....	180
TIME .....	180
TRANSMIT .....	181
TYPE .....	182
ULINEON .....	182
UNDEF .....	182
USERMSG .....	183
VIDREST .....	183
VIDSAVE .....	184
WAITFOR .....	185
WAITQUIET .....	186
WHEN .....	187
WHILE .....	188
WRITEC .....	189
XOR .....	189
ZERO .....	190
System Variables .....	190



## ***Overview***

---

This chapter provides alphabetized descriptions of all ASPECT command words (along with the parameters required by each word), mathematical operators, expressions and system variables. We'll cover the basic conventions used throughout this manual, as well as the rules that govern all ASPECT scripts.

## The Elements of ASPECT

---

The basic “building blocks” of ASPECT are commands, parameters and expressions. Each line in a source program (or *.ASP* file) begins with:

- a *command word* (usually followed by one or more *command parameters*, which control the function of the command in some manner).

OR

- an *expression* consisting of one or more *operands* acted upon by one or more *operators*; for example, the expression

**N0=N1+N2**

contains 3 operands (N0, N1 and N2) and 2 operators (the “=” and “+” signs). Operands usually occur as a numeric constant or variable, but they can also be the result of a sub-expression within the expression (like the “=” sign in our example above, which uses the result of the sub-expression **N1+N2**).

OR

- a *comment*, denoted with a semicolon (;) or with the **COMMENT** command. Any characters to the right of a semicolon (or in a **COMMENT** block) are removed from the compiled script, allowing you to heavily comment your source programs without losing speed or efficiency.

OR

- a *label* (in the form **LABEL:**) denoting a target location in a procedure which you can “jump” to with the **GOTO** command word.

Commands, parameters and expressions conform to rules called “syntax”; like the syntax of written languages, command syntax ensures that the function of each ASPECT statement is clear and precise.

## Naming Elements in ASPECT

All of the “named” elements in ASPECT—for example, command word names, procedure names, labels, variable names and **DEFINE** macros—follow the same basic syntax rules. Names have a maximum length of 80 characters.

Only the first 10 characters are treated as unique (therefore, two separate variables with names identical for the first 10 characters would be considered the same, and would generate a compiler error).

Names begin with any alphabetic character (A-Z or a-z) or an underscore (\_). Additional characters can be alphabetic, the underscore character or numeric (0-9). Examples of valid names are "NUM", "\_FINAL\_", "S0", "e" and "Term5".

All pre-existing names (like command words and system variables) are considered "reserved" within ASPECT, and can't be used as unique names; a full listing of these reserved names appears at the end of this manual in Appendix C.

## *Command Words and Parameters*

- Each command word begins on a separate line, and must be completed (with all added parameters) on that line—however, exceptionally long source lines can be "extended" to more than one line if a backslash (\) appears as the last character. No comments may follow the backslash. For example, both of these source lines are valid:

```
MESSAGE "ENTER YOUR NAME, PLEASE: "
```

```
WAITFOR "Enter your long message, please: " \
FOREVER
```

Note that if a quoted string constant is extended to two lines, any spaces occurring before the text on the second line will be included in the constant.

- The maximum length of a command line in a source file is 255 characters, including spaces and line termination characters (like a carriage return or line feed).
- Command words and parameters cannot be abbreviated—they must be spelled completely.
- Command words and parameters must be separated from each other by a space.
- Commands and parameters are not case-sensitive (except for string information between quotes, as in "Hello", and format specifiers used in the FATSAY, FSTFMT and STFMT commands, as in %d).

- Parameters always follow a command word on the same line (except when the backslash extender is used—see the paragraph at the beginning of this section).
- You **must** enter the parameters listed with a command (unless a parameter is enclosed in brackets or otherwise identified as optional).

## Operators

ASPECT supports numeric expressions composed of operators and operands. The more commonly-used operators include `!`, `~`, `++`, `--`, `*`, `/`, `%`, `+`, `-`, `<<` and `>>`. Operands include any numeric variables or constants.

For complete technical information on all of the supported operators, please see Appendix D at the back of this manual.

## Predefined Variables

For convenience, ASPECT provides both numeric and string “predefined” variables (which need not be declared at the beginning of a script). Predefined variables are not reset when chaining script files, so they can be used to pass values; their values are initialized to 0 or null when a script is initially executed. Note that ASPECT also accepts *user-defined* variables—predefined variable names are not required.

There are 10 predefined *string* variables, labelled S0 through S9; each can contain a maximum of 80 characters.

The predefined *numeric* integer variables are labeled N0 through N9; they’re typically used for math calculations.

## System Variables

*System* variables are “read-only” variables to which ASPECT assigns specific values; they’re available throughout an ASPECT script. For example, although you cannot change the value of the variable `$ROW` (the current row position of the cursor), you can read it anywhere within a script and use it in any statement where a *row* value is accepted.

Descriptions of all ASPECT system variables appear at the end of this chapter.

## *User-defined Variables*

ASPECT uses named elements called *variables* to store and manipulate values within a script. Variables are passed as parameters to commands, and can be used within expressions. User-defined variable names must adhere to the rules for valid element names, and it's recommended that you use easily-recognized names that identify their use within a source program.

There are four types of variables: INTEGER, STRING, FLOAT and LONG. Complete information on the valid ranges and function of each variable type is provided in the section titled "ASPECT Conventions" later in this chapter.

## *User-defined Constants*

User-defined string constants and variables can contain a sequence of up to 80 characters. Any ASCII character value may occur in a string variable (some characters are not displayable). To use a quotation mark within a text string, precede it with the special escape character ' (ASCII 96)—for example, MESSAGE "She said "'Hello'"". The NULL character (ASCII 0) normally indicates the end of a text string (and is not considered a part of the 80-character limit). For security, ASPCOMP encrypts all string constants during compilation.

User-defined integer and long constants can be specified in decimal or hexadecimal, while floating point constants must be entered in decimal format only. No spaces are allowed between the characters in a numeric constant.

For further information on each type of constant, please refer to ASPECT Conventions below.

## *Global and Local Variables*

Up to 128 *global variables* of each type can be declared (a maximum of 512 total). Global variables are declared anywhere within a source program **outside** of any procedure (typically, this is at the top of a source program, before any procedures appear).

A global variable can be referenced within any procedure; if a procedure changes a global variable, its previous value is not saved.

Globals cannot be passed to another script by chaining—only the predefined Nx and Sx variables can pass information to another script.

*Local variables* are declared with the same commands as globals—however, they can only be referenced within the procedure where they're declared (unlike globals, which are declared outside of any procedure), and only 128 total local variables (of any type) can be used in a procedure.

The same local variable name can be used in more than one procedure, but each occurrence is a completely different case and has no effect on any other occurrences.

Global and local variables must be declared before they are referenced; several variable definitions may occur on the same line if each definition is separated with a comma. Variables may also be initialized when they're declared, as in:

```
integer number1, number2=13
```

## *Escape Sequences*

ASPECT uses *escape sequences* in string and character constants to represent nondisplayable characters and control codes (which have special meanings to hardware devices). They consist of a backwards single quote character (ASCII 96, the un-shifted tilde key, sometimes called the "back tic") followed by an alphabetic character or series of digits. The display screen will not be affected by control codes when using ASPECT commands which write directly to video memory (such as ATSAY and FATSAY).

The following escape sequences are supported:

<u>Sequence</u>	<u>ASCII</u>	<u>Description</u>
'a	7	Bell or alert
'b	8	Backspace
'f	12	Form feed
'n	10	New line/line feed
'r	13	Carriage return
't	9	Horizontal tab
'v	11	Vertical tab
"	39	Single quote
"	34	Double quote
"	96	Backwards single quote
'ddd		ASCII character, octal notation
'xdd		ASCII character, hex notation

If a backwards single quote precedes a character not listed above, the backwards single quote will be ignored.

When a "ddd" sequence is used, it may consist of one to three digits (ranging from 0 to 255). Values greater than 255 will generate an error. It's usually best to use all three digits (as in '004), since a letter or digit immediately following an escape sequence may represent either an octal or hex character (which would then be interpreted as part of the escape sequence).

## Character Constants

A character constant is an integer value representing an ASCII character within the range 0 through 255. It consists of a single quote (ASCII 39) followed by an ASCII character and a terminating single quote. An escape sequence may also be used to represent an ASCII character within a character constant. For example:.

```
integer letter_a = 'a'           (integer constant 97)
integer escape = "'033'"        (integer constant 27)
```

## Labels and Procedures

*Labels* use a special name format. They must end in a colon and begin on a separate line—for example:

```
LABEL1:
```

Labels are used only with the GOTO command word (each GOTO specifies a label as a destination).

*Procedure* names are user-defined elements provided as parameters for the PROC and CALL command words—for example:

**proc update**

defines the beginning of a procedure block named UPDATE; you could later branch to that procedure with the statement:

**call update**

## ASPECT Conventions

The following conventions are used to describe ASPECT commands and their parameters:

<b><i>Lowercase italic</i></b>	Substitute a variable or constant for a parameter shown in <i>lowercase italic</i> .
<b>[   ]</b>	Any parameter enclosed in square brackets ([   ]) is <b>optional</b> .
<b> </b>	If multiple parameters are separated from each other by a vertical bar ( ), choose only a <b>single</b> parameter; the vertical bar indicates "or".
<b>" "</b>	Quotation marks should be entered wherever shown.
<b>...</b>	You may insert any number of parameters in the location marked by an ellipsis ( ... ).
<b>.</b>	Three vertical dots indicate any number of command statements in a <i>command block</i> .
<b>.</b>	Examples of commands that use command blocks are the PROC and WHILE statements.
<b>attribute</b>	An integer value which specifies the background and foreground colors to be used with a command. Legal values range from 0 to 255.

To compute the attribute value, select a foreground and a background color from the following list—note that the bright intensity colors can only be used as foreground (text) colors:



**Regular  
Intensity**

0 Black  
 1 Blue  
 2 Green  
 3 Cyan  
 4 Red  
 5 Magenta  
 6 Brown  
 7 Lt Grey

**Bright  
Intensity**

8 Dk Grey  
 9 Lt Blue  
 10 Lt Green  
 11 Lt Cyan  
 12 Lt Red  
 13 Lt Magenta  
 14 Yellow  
 15 White

Multiply the background color by 16 and add the result to the foreground number. The final result is the attribute value. For example, the attribute for a blue background and a high intensity white foreground is 31:  $(1 \times 16) + 15 = 31$ .

**character**

An integer representing an ASCII character value between 0 and 127 (or 255, if 8-bit values are included). Control characters range between 0 and 31, while displayable characters are usually considered to range from 32 to 126.

**column**

A vertical column on the screen, specified either as an integer constant or variable. The maximum value of column is equal to the number of columns on the display screen minus 1; column 0 is always the leftmost column of the screen.

**disk**

An integer specifying a disk drive within the current command. A value of 0 represents the current or default drive, 1 represents drive A, 2 represents drive B and so on.

<b>float</b>	Any floating point constant or variable. Float numbers range from approximately +/- 2.225e-308 to 1.797e+308. Float constants must be in decimal format (zero or more decimal digits from 0 to 9 followed by a period and zero or more decimal digits for the fractional portion, as in "1.32"). At least 1 digit must appear before or after the decimal point. Any numeric constant containing a period is assumed to be a floating point number. Several mathematical commands and their associated operators are not compatible with floating constants and variables—these include the complement, shift and bitwise commands and operators COMP, SHL, SHR, AND, OR, XOR, "~", "<<", ">>", "&", " " and "^". No spaces are allowed between the characters in a float constant.
<b>filespec</b>	A string specifying the path and/or filename to be used in a command.
<b>floatvar</b>	Any floating point variable.
<b>index</b>	A zero-based integer indicating a single element (where several are available). For WHEN, CWHEN, SETJMP, LONGJMP, VIDSAVE and VIDREST, the index values range from 0 to 2. For file I/O operations like FOPEN and FCLOSE, index values range from 0 to 5.
<b>integer</b>	Any integer constant or variable. Integers are signed, and can range between -32768 and 32767. Integer constants may be specified in decimal or hexadecimal format. Any constant appearing in decimal format (within the range of integer values) is considered an integer type, as is any number composed of 4 or less hexadecimal digits (if the number is longer than 4 hex digits, it's assumed to be a long constant). No spaces are allowed between the characters in an integer constant.
<b>intvar</b>	Any integer variable.
<b>length</b>	An integer specifying a string length, numeric input length or floating point precision; possible values range from 0 to 80.

<b>long</b>	Any long constant or variable. Long numbers are signed, with a range of -2,147,483,648 through 2,147,483,647. Long constants may be specified in decimal or hexadecimal format. A constant without a period may be forced as a long constant by appending the letter "L" to the end (the character can be upper or lower case). No spaces are allowed between the characters in a long constant. Truncation will occur if necessary.
<b>longvar name</b>	Any long variable. An unquoted character string containing the name of a procedure, macro, label or variable. For more information, see "Naming Elements in ASPECT" in this chapter.
<b>number</b>	Any integer, long or floating point constant or variable. No spaces are allowed between the characters in a numeric constant.
<b>numvar</b>	Any integer, long or floating point variable.
<b>Nx</b>	A "predefined" numeric integer variable, where <i>x</i> ranges from 0 to 9.
<b>offset</b>	An integer representing a memory address or offset value within a memory segment. The value is treated as unsigned within a command statement, with values ranging from 0 to 65535. Values greater than 32767 must be entered as hexadecimal.
<b>port</b>	An integer representing an I/O port address value—this value should not be confused with the COM port Dialing Directory field or the Line Settings window. The value is treated as unsigned within a command statement, ranging from 0 to 65535. Port values greater than 32767 must be entered as hexadecimal.
<b>protocol</b>	A valid protocol name; used by the SENDFILE and GETFILE commands.
<b>row</b>	A horizontal row on the screen, specified as an integer constant or variable. The maximum value of row is equal to the number of rows on the display screen minus 1; row 0 is always the top row of the screen.

<b>segment</b>	An unsigned integer value corresponding to a memory segment address. The value is treated as unsigned within a command statement, ranging from 0 to 65535. Values greater than 32767 must be entered as hexadecimal.
<b>string</b>	Any quoted string constant or variable. A quoted string constant can be up to 80 characters in length, and is surrounded by quotation marks (for example, <i>"Hello"</i> ).
<b>stringvar</b>	Any string variable.
<b>strindex</b>	A zero-based integer specifying a character position in a string; possible values range from 0 to 79.
<b>Sx</b>	A "predefined" string variable, where <i>x</i> ranges from 0 to 9.
<b>terminal</b>	A valid terminal emulation name; used by the EMULATE and SET EMULATION commands.

## *A Note on Examples*

To add clarity, examples in this manual are presented in lowercase. You may use either upper- or lowercase (or both) in your scripts to make your code easier to read; for instance, uppercase can be used to make command words or procedure names "stand out" in your script! The only case-sensitive elements within ASPECT are quoted strings and the format specifiers used in the FATSAY, FSTRFMT and STRFMT commands.

## *Using Remote ASPECT Commands*

PROCOMM PLUS also allows a remote user to execute ASPECT script command statements (enabling you to control your computer from a distant location). Remote commands are sent from another computer with the sequence:

**[Ctrl]-[D] command <CR>**

where **[Ctrl]-[D]** (or **^D**) = decimal 4 and **<CR>** = decimal 13. For example, to force your system to disconnect, a remote computer might send **[Ctrl]-[D] HANGUP <CR>**.

To send this same command from a Meta key or from a script file, the ^D and carriage return must be translated; therefore, when executed from a script the command would be TRANSMIT "**^DHANGUP^M**".

This remote capability will work with all terminal emulations, but you must enable remote commands in the Setup facility (see the discussion of the Setup "General Options" in your USER MANUAL). Most users can't type fast enough to enter remote commands manually (a maximum of two seconds may elapse between characters); therefore, use Meta keys or script files to send them whenever possible.

You'll find more information on remote commands and an example of their use in Chapter 5 of this manual.

## ADD

---

Adds the first two numbers and stores the result in the last numeric variable.

**ADD** *number number numvar*

### Example

Integer items=5

add items 12 N2

Integer first=4, last=4, tot

add first last tot

N2 = ITEMS + 12

TOT = 8

### Comments

Make sure the result of your addition isn't beyond the range of the numeric variable's data type; PROCOMM PLUS does no error checking on this value.

As with any mathematical expression, the result will be truncated (if necessary) to fit the range of values for the data type.

The *command* form "ADD N1 N2 N3" is equivalent to the *operator* form "N3=N1+N2".

### See also

MUL and INC.

## ALARM

---

Sounds an alarm to alert you to an event.

**ALARM** [*integer*]

*integer*

An integer value that specifies the amount of time the alarm will sound (in seconds). The default value is the Alarm Time specified in the Display/Sound Options Setup submenu. This parameter can also be set with the SET ATIME command.

### Example

**ALARM 5**

Sounds the alarm for 5 seconds. If the optional integer is omitted, the Setup default will be used.

### Comments

If the SET ALARM command is OFF or if Alarm Sound in the Setup is set OFF, this command has the same result as a PAUSE command.

### See also

SET ATIME, SET ALARM and SOUND.

## AND

---

This command performs a bitwise comparison of two numbers and places the result in the specified numeric variable. For each two bits compared, the resulting variable is assigned the value 1 or 0 in the same corresponding bit position. A 1 is assigned if both bits are 1, while a 0 is assigned if either or both of the bits are 0.

**AND** *number number numvar*

### Comments

AND cannot be used with floating point numbers.

The *command* form "AND N0 N1 N2" is equivalent to the *operator* form "N2=N0&N1".

### See also

OR and XOR.

## ANDL

---

This command performs a logical-AND operation on two numbers and places the result in the specified integer variable. The result is 1 if both numbers are non-zero. The result is 0 if either or both of the numbers are zero.

**ANDL** *number number intvar*

### Comments

The *command* form "ANDL N0 N1 N2" is equivalent to the *operator* form "N2=N0&&N1".

### See also

OR and ANDL.

## ASSIGN

---

Assigns a text string or another string variable to a string variable.

**ASSIGN** *strovar string [length]*

### Examples

**string** digits  
**assign** digits "12345"

Sets the value of variable DIGITS to 12345; the *operator* equivalent for this statement would be DIGITS="12345".

**string** astr, bstr  
**assign** astr bstr

Sets the value of variable ASTR to the value contained in string variable BSTR. The *operator* equivalent for this statement would be "ASTR=BSTR".

### Comments

The optional length value determines the maximum number of characters to copy from *string*.

### See also

STRCPY, STRCAT, STRUPDT, SUBSTR and STRSET.

## ATGET

---

Relocates the cursor at a row and column and gets a string or number (entered at the keyboard) using the specified color attributes.

**ATGET** *row col attribute length strvar|numvar* [DEFAULT]

**length**

An integer value between 1 and 80 that determines the maximum number of characters that will be accepted. A beep will sound if the user attempts to enter more characters than you specify.

**strvar|numvar**

The variable where the string or number is stored.

[DEFAULT]

An optional parameter indicating that the present variable contents should be displayed as a default entry. If the user presses **Enter** alone, the default value will be used.

### Example

**string response**

Saves the screen.

**vidsave 0**

Displays box.

**box 5 15 9 60 7**

Gives prompt.

**atsay 7 18 15 "Name: "**

On row 7 column 25, using reverse video (112), get a 32-character string into RESPONSE.

**atget 7 25 112 32 response**

**if success**

**fatsay 24 0 15 " Your name is %s " response**

**pause 3**

**endif**

**vidrest 0**

### Comments

When responding to an ATGET command, the user must press **Enter** to signal that input is complete. The carriage return is not included in the text string stored in a string variable.

The cursor position will remain at the location where the user pressed **Enter** or **Esc**.



ATGET can be exited with the **[Esc]** key (the IF FAILURE statement returns "TRUE").

### See also

GET, KEYGET, MATGET, ATSAY, FATSAY and MGET.

## ATOF

---

Converts the contents of an ASCII string to a floating point value.

**ATOF** *string floatvar*

*string*

String to convert to a float variable. Conversion begins at the first floating point digit.

*floatvar*

Variable where the float value is stored.

### Example

float amount=0

atof "\$5.47" amount

AMOUNT = 5.47.

### Comments

If the string doesn't contain a float value, ATOF returns a value of 0.

### See also

ATOI, ATOL and FTOA.

## ATOI

---

Converts the contents of an ASCII string to an integer value.

**ATOI** *string intvar*

*string*

String to convert to an integer. Conversion begins at the first digit.

*intvar*

Variable where the integer is stored.

### Examples

string temp="12345"

atoi temp n0

N0 = 12345.

```
string test="123the end"
atoi test digits
```

DIGITS = 123.

```
integer answer
assign s3 " 345 7"
atoi s3 answer
```

ANSWER = 345.

```
integer intnum
string title="The end..."
atoi title intnum
```

INTNUM = 0.

### Comments

The function stops reading the string at the first non-numeric character and then processes the numeric characters into the corresponding integer value. If the string doesn't contain an integer value, ATOI returns a value of 0.

Conversion begins at the first digit encountered in the string.

ATOI will not convert hexadecimal numbers.

### See also

LTOA, FTOA and ITOA.

## ATOL

---

Converts the contents of an ASCII string to a long value.

*ATOL string longvar*

*string*

String to convert to a long value.

*longvar*

Variable where the long is stored.

### Example

```
long speed
atoi "38400" speed
```

SPEED = 38400.

### Comments

The function starts reading at the first digit encountered and stops reading the string at the first non-numeric character; ATOL then processes the numeric characters into the corresponding long value. If the string doesn't contain a long value, ATOL returns a value of 0.

ATOL will not convert hexadecimal numbers.

**See also**

ATOI, ATOF and LTOA.

## **ATSAY**

---

Displays a constant or variable on the local screen at the specified position and with the specified attribute colors.

**ATSAY** *row column attribute string|number*

**Example**

**atsay 10 0 4 "Hello, Bruce!"**

Displays "Hello, Bruce!" in red at row 10, column 0.

**See also**

MESSAGE, ATGET and FATSAY.

## **BLANKON**

---

Sets the foreground attribute equal to the background attribute, effectively blanking any subsequently-displayed characters.

**BLANKON**

**See also**

BLINKON, BOLDON, DIMON and NORMON.

## **BLINKON**

---

Turns on the blinking attribute for Terminal mode display.

**BLINKON**

**See also**

REVN, BOLDON, DIMON and NORMON.

## BOLDON

---

Turns on the bold attribute for Terminal mode display.

**BOLDON**

**See also**

REVON, ULINEON, DIMON and NORMON.

## BOX

---

Draws a colored box on the screen.

**BOX** *row column row column attribute*

<i>row</i>	Row number of the upper-left corner of the box.
<i>column</i>	Column number of the upper-left corner of the box.
<i>row</i>	Row number of the lower-right corner of the box.
<i>column</i>	Column number of the lower-right corner of the box.

### Example

<b>box 0 0 23 10 79</b>	Draws a white framed box with red background from row 0, column 0 (upper-left corner) to row 23, column 10 (lower-right corner).
-------------------------	--

**See also**

ATSAY and SCROLL.

## **BREAK**

---

Sends a break to a remote computer system.

### **BREAK**

#### **Examples**

**set break 500**

Sets the break length to 500 milliseconds.

**BREAK**

Sends a break.

#### **Comments**

The length of the break can be specified within Setup (or with the SET BREAK command).

#### **See also**

SET BREAK.

## **BYE**

---

Terminates the executing script file and exits PROCOMM PLUS without disconnecting.

### **BYE**

#### **Example**

**transmit "Logoff"**  
**bye**

Sends a message and quits PROCOMM PLUS (the connection is not broken).

#### **Comments**

To perform the same function and disconnect the user, use the QUIT command.

#### **See also**

CONNECT, EXIT, QUIT and TERMINAL.

## CALL

---

Branches to a specified procedure and allows a return.

**CALL** *name* [WITH *param*[*param*]...[*param*]]

### Example

```
proc main
  integer number=1
  call proc2 with number
  call proc3 with &number
endproc
```

This structured MAIN procedure CALLs two other procedures, passing NUMBER to each. Note that the "&" symbol is used in the CALL to PROC3.

```
proc2
  intparm x
  ++x
endproc
```

The value for NUMBER remains 1 in the MAIN procedure (it was passed by *value*).

```
proc3
  intparm y
  ++y
endproc
```

The value for NUMBER now becomes 2 in the MAIN procedure (it was passed by *reference*).

### Comments

An optional parameter list can be included with the CALL command; up to 10 parameters can be specified, and their order must be the same as the order in which they are declared in the CALLED procedure. A parameter can be a constant or a variable.

Variables are normally passed by *value*, where only the variable's value is sent and changes made to it are not returned to the CALLing procedure (the variable remains unaffected).

The "&" character may precede a variable parameter to indicate that it's being passed by *reference*; any changes made to the corresponding parameter by that procedure will be recorded in the variable after control returns.

### See also

RETURN, PROC, ENDPROC and GOSUB.

## CASE

---

Provides conditional **SWITCH** command processing based on a match between a specified string or integer and the target string or integer.

**CASE** *integer|string*

### Comments

A match (case-insensitive) causes processing to continue with each command on subsequent lines until the **ENDCASE** command is encountered. No match results in the processing of any subsequent **CASE** or **DEFAULT** command.

The **SET SWITCHCASE** command allows case-sensitive string matches.

See the **SWITCH** command for further information on **CASE**.

### See also

**SWITCH**, **DEFAULT**, **EXITSWITCH**, **ENDCASE** and **SET SWITCHCASE**.

## CEIL

---

Computes the smallest integer value (with no fractional amount) *greater than or equal* to a floating point number.

**CEIL** *float numvar*

### Example

**float price=3.2**

**integer high**

**ceil price high**

**HIGH = 4.**

### See also

**FLOOR**.

## CHDIR

---

Changes the current directory and/or drive.

**CHDIR** *filespec*

*filespec*

Identifies the DOS drive (for example, A:), pathname and directory. The drive identifier is only required if you change the current drive.

### Examples

**chdir** "A:"

Changes the current drive to the root directory of drive A.

**chdir** "C:\COMM"

Changes the current drive to C: and the current directory to \COMM.

**chdir** "\COMM\PT2"

Changes the current directory to \COMM\PT2.

### See also

**MKDIR**, **RMDIR** and **GETDIR**.

## CLEAR

---

Clears the screen with the specified colors (changing the default color used for terminal displays).

**CLEAR** [*attribute*]

*attribute*

The optional attribute value allows you to change the background and foreground colors and to reset the current colors. Legal values are 0 - 255.

### Examples

**clear**

Clears screen to currently set colors.

**clear 31**

Clears the screen to a Blue background and a high intensity White foreground and also resets the current colors.



**Comments**

For a complete listing of attribute values, see the section titled "ASPECT Conventions" earlier in this chapter.

**See also**

SCROLL.

**COMGETC**

---

Assigns a numeric variable to the next character value in the receive data buffer.

**COMGETC** *intvar*

**Example**

integer nxchar  
comgetc nxchar

Assigns the variable NXCHAR to the value of the next receive buffer character.

**Comments**

If the receive buffer is empty, COMGETC returns a value of -1.

Any active WHEN statement will be checked against the character value retrieved by COMGETC.

**See also**

COMGETCD and SET RXDATA.

**COMGETCD**

---

Pauses up to two seconds, then assigns a numeric variable to the next character value in the receive data buffer.

**COMGETCD** *intvar*

**Example**

integer newchar  
comgetc newchar

Assigns the variable NEWCHAR to the value of the next receive buffer character.

## Comments

Similar to COMGETC, COMGETCD will wait up to two seconds for a character to enter the receive buffer; if the buffer remains empty, COMGETCD returns a value of -1.

Any active WHEN statement will be checked against the character value retrieved by COMGETCD.

### See also

COMGETC and SET RXDATA.

## COMMENT

---

Denotes the start of a comment block. Any commands or remarks following this command are ignored by the compiler until an ENDCOMMENT is found. COMMENT blocks cannot be nested.

### COMMENT

### See also

ENDCOMMENT.

## COMP

---

This command performs a bitwise complement (1's complement) of a number and places the result in the specified numeric variable. For each bit in the number, the resulting variable is assigned the value 1 or 0 in the same corresponding bit position. A 1 is assigned for each 0 bit in the number. A zero is assigned for each 1 bit in the number.

**COMP** *number numvar*

### Comments

COMP cannot be used with floating point numbers.

The *command* form "COMP N0 N2" is equivalent to the *operator* form "N2=~N0".

### See also

OR and XOR.

## COMPUTC

---

Sends the specified character value at the communications port.

**COMPUTC** *integer*

### Example

**computc 'A'**

Sends the character A out the active port.

**computc 94**

Sends the ^ character out the active port.

### Comments

Range checking is suppressed for COMPUTC. Use TERMKEY to send the current emulation's Keyboard Mapping code for keys like function and cursor control keys.

### See also

COMGETC and TERMKEY.

## CONNECT

---

Exits the script file and returns to Terminal mode.

**CONNECT**

### Comments

EXIT, TERMINAL and CONNECT all perform the same function.

### See also

BYE, EXIT, QUIT, and TERMINAL.

## CURDN

---

Moves the cursor down one line.

**CURDN**

### See also

CURLF, CURRT and CURUP.

## **CURLF**

---

Moves the cursor one column to the left.

**CURLF**

**See also**

RCA, CURRT and CURUP.

## **CUROFF**

---

Turns cursor off.

**CUROFF**

**See also**

CURON, GETCUR, LOCATE and SET BLOCKCUR.

## **CURON**

---

Turns cursor on.

**CURON**

**See also**

CUROFF, GETCUR, LOCATE and SET BLOCKCUR.

## **CURRT**

---

Moves the cursor one column to the right.

**CURRT**

**See also**

RCA, HOME and CURUP.

## CURUP

---

Moves the cursor up one line.

**CURUP**

### See also

RCA, HOME and CURDN.

## CWHEN

---

Deactivates an active WHEN command.

**CWHEN** *index* | DISCONNECT

### Example

```
when 0 "MORE?" \
transmit "Y^M"
CWHEN 0
```

Deactivates a previous WHEN command indexed as 0. Note the use of the backslash (\) extender character.

### Comments

The integer parameter identifies which of the WHEN commands to deactivate—up to three WHEN commands can be active, with valid index values of 0, 1 and 2.

The DISCONNECT option allows the clearing of a previous WHEN DISCONNECT command.

### See also

WHEN.

## DATE

---

Gets current system date into a string variable.

**DATE** *strvar*

*strvar*

The variable where the date is placed, in the format MM/DD/YY.

**See also**

TIME and \$DATE system variable.

## DEC

---

Decrements a numeric variable by one.

**DEC** *numvar*

**Comments**

It is possible to decrement a number beyond the range of the numeric variable's data type; ASPECT does no error checking on this value.

The operator equivalent for the statement "DEC N1" is "N1-".

**See also**

INC and SUB.

## DEFAULT

---

Provides for processing when no match is found among the CASE statements in a SWITCH command block. See the SWITCH command for further information.

**DEFAULT**

**Comments**

DEFAULT can occur anywhere among the separate CASE statements.

**See also**

SWITCH, CASE and EXITSWITCH.

## DEFINE

---

Defines a macro name and the text to substitute for it during compilation.

**DEFINE** *name text*

### Examples

**define red 7**

Defines the macro RED as the string value 7.

**define myname "Anne J."**  
**transmit myname**

Defines the macro MYNAME as the quoted text string "Anne J." and transmits it to the remote system.

**define wblue 31**  
**define bgrey 113**  
**atsay 10 20 wblue "NAME: "**  
**atget 10 20 bgrey "PASSWORD:"**

Defines the macros WBLUE and BGREY and uses them as attributes for later ATSAY statements.

### Comments

Similar to macros in the "C" programming language, DEFINE allows for *textual substitution* within a source program.

A macro definition is activated at the point where the DEFINE occurs, and it remains active until the definition is removed (with the UNDEF command) or the source program ends.

If an active macro name is encountered, the text DEFINED for that macro is substituted for the name, and compilation continues at the beginning of the substituted text; this can save time and keystrokes when writing source programs, since often-repeated text can be inserted with macros. If you must frequently modify a script, macros can make that task much easier, too (simply change the text of a macro instead of each occurrence of the macro name).

You can also test for the existence of a DEFINED macro name (the text portion of the DEFINE is ignored); use \$IFDEF or \$ELSEIF to perform *conditional compilation*. If the name exists, the commands which follow (from the \$IFDEF or \$ELSEIF up to the corresponding \$ELSEIF, \$ELSE or \$ENDIF) will be included in the compiled script—otherwise, the commands will be ignored. The \$ELSE command will cause all commands (up to the corresponding \$ENDIF) to be included if the previous \$IFDEF or \$ELSEIF condition had failed. \$IFDEF commands can be nested.

There is no limit to the number of macros within a source program. Macro text can consist of zero or more items, each separated by a space.

You can also **DEFINE** a macro at compile time with the **ASPCOMP /D** switch. Quotation marks must be used if the macro **DEFINES** a string, and the command line allows a maximum of one token in the macro text. Your macro will be expanded during compilation to include the command line data.

To **reDEFINE** a macro, you must first remove its current definition with the **UNDEF** command.

Any occurrence of a macro name prior to its definition (except within a **\$IFDEF** or **\$ELSEIF** command) will generate an error.

For more advanced examples of **DEFINE**, refer to Chapter 5 of this manual.

### See also

**\$IFDEF**, **\$ENDIF**, **\$ELSEIF** and **UNDEF**.

## DELETE

---

Deletes a specified file.

**DELETE** *filespec*

### Example

**string** file="temp.fil"

**delete** file

**if** failure

**fatsay** "Can't delete %s" file

**endif**

Deletes the file **TEMP.FIL**. If the operation fails, an error message is displayed.

### Comments

The *filespec* may include a directory path. Wildcards are not allowed.

A **DELETE** operation can be tested with the **IF SUCCESS** and **IF FAILURE** statements.



## DELCHAR

---

Deletes the character at the current cursor position. Any text from the current cursor position to the end of the line will be shifted one column to the left.

### DELCHAR

#### See also

DELLINE and INSLINE.

## DELLINE

---

Deletes the entire line at the current cursor position. Lines below the current cursor position will be scrolled up one line.

### DELLINE

#### See also

DELLINE and INSLINE.

## DIAL

---

Calls an entry in your Dialing Directory.

**DIAL** "[ldcode]entry[ldcode]..." | *strvar*[*strvar*]

#### *entry*

Indicates the Dialing Directory entry number you wish to call. Ensure that this number accurately represents the entry you wish to use; if you sort your Dialing Directory, this number may change and your script will have to be updated.

#### *ldcode*

An entry can be prefixed and/or appended with a dialing code (see "Adding or Changing a Dialing Code" in your USER MANUAL).

#### *strvar*

A variable which you can set to a valid Directory entry number and use in place of a numeric entry.

**strvar**

A variable in which PROCOMM PLUS returns the number of the Dialing Directory entry with which a connection has been made.

**Examples**

**dial "5"**

Dials entry 5 in the Dialing Directory.

**dial "A5B"**

Dials code A, Dialing Directory entry 5 and lcode B.

**string numbers**

**assign numbers "1 2 3 4"**

**dial numbers s1**

Dials entry numbers 1 through 4 until a connection is made, and stores in S1 the number of the entry with which the connection was made.

**if not fromddir**

**dial "5"**

**endif**

Calls entry 5, unless the script file is linked to the Dialing Directory.

**Comments**

Each entry in the dialing string must be separated from the next by a space or comma; however, no spaces should occur within an entry (including its *ldcodes*).

If either the dialing string or string variable contain a list of entry numbers, they are put into a dialing *queue* (for more information about the dialing queue, see your USER MANUAL).

The IF NOT FROMDDIR statement can be used to check if the script was executed from a Dialing Directory entry.

**See also**

DLOAD, MDIAL and REDIAL.

## ***DIMON***

---

Turns on the dim attribute for Terminal mode display.

**DIMON****See also**

BLINKON, BOLDON, ULINEON and NORMON.

## DIR

---

Displays a paginated list of files.

**DIR** [*filespec*]

*filespec*

A valid path/filename or filename search pattern. Wildcards are allowed, and this value can be a variable.

### Example

**string spec**

Displays all files with the extension *.ASP* in the current directory.

**assign spec** *"\*.ASP"*

**dir spec**

**dir** *"C:\PCPLUS\\*.ASX"*

Displays all files in the directory *C:\PCPLUS* with the extension *.ASX*.

### Comments

This is the script equivalent of **[Alt]-[F]** in Terminal mode. The default *filespec* is *\*.\** (or all files).

## DISKFREE

---

Returns the free disk space of the specified drive into a long variable.

**DISKFREE**

**DISKFREE** *disk longvar*

*disk*

An integer number designating the drive; 0 indicates the current drive, 1 specifies drive A, 2 indicates drive B and so on.

### Example

**long free**

**diskfree** 0 free

Places the free space available on the current drive into the long variable **FREE**.

### See also

GETDIR and MEMFREE.

## DIV

---

Divides the first number by the second number and stores the result in the last numeric variable.

**DIV** *number number numvar*

<i>number</i>	The dividend.
<i>number</i>	The divisor.
<i>numvar</i>	The result of the division.

### Examples

**init hundred=100, ten=10, result**      **RESULT = HUNDRED/TEN =**  
**div hundred ten result**                      **100/10 = 10.**

**div hundred 33 N9**                              **N9 = HUNDRED/33 = 100/33 = 3.**

**div 369 3 figure**                                **FIGURE = 369/3 = 123.**

### Comments

For integer and long values, any remainder from the division will be discarded (for example:  $3/2 = 1$ ,  $2/3 = 0$ ).

Any division by 0 in your script results in an error message during execution.

### See also

MOD and MUL.

## DLOAD

---

Loads a different Dialing Directory.

**DLOAD** *filespec*

### Comments

The .DIR file extension is optional.

If the directory does not exist (either in the current directory or in the directory specified with the "SET PCPLUS=" environment variable), DLOAD will create an empty directory with that name.

## DOS

---

Executes a DOS command or another program within a PROCOMM PLUS script file.

**DOS** *string* [WAIT|NOCLEAR]

<i>string</i>	Any executable command as it would appear on the DOS command line (optionally including a DOS path).
<b>WAIT</b>	Suspends processing after termination of the DOS function until the user presses a key.
<b>NOCLEAR</b>	Prevents PROCOMM PLUS from saving and clearing the screen before executing the command (and restoring the screen upon returning from the program).

### Examples

<b>string c1</b> <b>c1="TYPE temp.fil &gt; PRN"</b> <b>dos c1</b>	Prints the file TEMP.FIL.
<b>dos "del FILE.EXT" wait</b>	Deletes the file FILE.EXT and waits for the user to press a key.
<b>dos "sortdisk" noclear</b>	Runs the program SORTDISK (without clearing the screen beforehand).

```
if failure
    message "Can't execute command!"
endif
```

### Comments

If the path to the executable command is not specified, the program or external DOS command (such as FORMAT, which is not internal like DIR) must be either in the current directory or in the directory specified in your DOS path. Also, if you're using a hard disk system, COMMAND.COM must be in the directory from which you started your computer (typically the root directory of drive C) or in the location specified by the COMSPEC environment variable. If you're using a floppy disk system, COMMAND.COM must be on the disk in drive A (or in the directory found in COMSPEC).

This command can be tested with the **IF SUCCESS** statement, returning a "FALSE" if **COMMAND.COM** is not found and "TRUE" if it is found (even if the command to be executed is invalid or fails to execute). The **RUN** command provides a similar function and provides better testing for DOS external commands and other programs.

Be sure that you have enough memory to execute the specified command and **PROCOMM PLUS** at the same time. If you use the **DOS** command to execute a program or command that requires user input, be sure that anyone using the script file is aware of this, since processing will halt until the required input is provided.

Unlike the **RUN** command, the **DOS** command will execute both standard DOS batch files and internal DOS commands; **RUN** only accepts **.COM** and **.EXE** programs.

If **NOCLEAR** isn't specified, the screen and cursor position are saved, the cursor is moved to position 0,0 and the screen is cleared. After the **DOS** function has finished, the previous screen and cursor position are restored.

For more information, see Chapter 4 later in this manual.

### See also

**RUN**, **HOOK**, **METAKEY**, **MEMFREE** and **SHELL**.

## DOSVER

---

Returns the current DOS version into a string variable.

**DOSVER** *strvar*

### Comments

Both the major and minor version numbers are included.

### Example

```
STRING OS_ver
STRING OS_maj
STRING OS_min
DOSVER OS_ver
```

Loads the DOS version into the string variable **OS\_VER**. The **SUBSTR** command extracts the major and minor version numbers into **OS\_MAJ** and **OS\_MIN**, respectively.

```
SUBSTR os_maj os_ver 0 1
SUBSTR os_min os_ver 2 2
```

## DSCROLL

---

Scrolls an area of the screen down by the specified number of lines. This is similar to the BIOS scroll function.

**DSCROLL** *integer row column row column attribute*

*integer*

An integer value ranging between 0 and the number of rows on screen; this parameter determines the number of lines to scroll down within the defined area. If the value is 0, then the entire scroll area is blanked.

*row column*  
*row column*

Defines the upper left and lower right corners of the scroll area.

### Comments

DSCROLL works identically to the SCROLL command (moving the screen area down instead of up).

### See also

SCROLL.

## EBOL

---

Erases text from the current cursor position to the beginning of the line.

**EBOL**

### See also

EBOS, EEOL and EEOS.

## ***EBOS***

---

Erases text from the current cursor position to the beginning of the screen.

**EBOS**

**See also**

EBOL, EEOL and EEOS.

## ***EEOL***

---

Erases text from the current cursor position to the end of the line.

**EEOL**

**See also**

EBOL, EBOS and EEOS.

## ***EEOS***

---

Erases text from the current cursor position to the end of the screen.

**EEOS**

**See also**

EBOL, EBOS and EEOL.



## **ELSE**

---

Executes an alternate set of commands when the conditions specified in the associated IF or ELSEIF commands evaluate as "FALSE". See the IF command for further information.

### **ELSE**

#### **Example**

```
integer normcolor
if mono
    normcolor=7
else
    normcolor=31
endif
```

Sets the integer variable NORMCOLOR to 7 if the computer is using a monochrome adaptor; if the adaptor is anything else, NORMCOLOR becomes 31.

## **\$ELSE**

---

Allows conditional compilation by testing for the existence of a DEFINED macro name. For more information, see the DEFINE command.

### **\$ELSE**

## **ELSEIF**

---

Performs multiple tests of conditional expressions. ELSEIF can be used instead of nested IF ... ENDIF command blocks.

Conditions can include any numeric expression involving logical or numeric operators and operands. If the expression evaluates to a non-zero value, the condition was satisfied (and is considered "TRUE"), while a value of 0 indicates that the test was "FALSE".

See the IF command for further information.

### **ELSEIF** *condition*

#### **Example**

```
atget 5 5 31 1 choice
if choice == 1
    call menuitem1
elseif choice == 2
    call menuitem2
else
    call selecterr
endif
```

The integer variable CHOICE determines whether to CALL either MENUITEM1 or MENUITEM2. If CHOICE is not equal to 1 or 2, the procedure SELECTERR is CALLED instead.

## **\$ELSEIF**

---

Allows conditional compilation by testing for the existence of a DEFINED macro name. For more information, see the DEFINE command.

### **\$ELSEIF**

## **EMULATE**

---

Changes the active emulation to the terminal type specified.

### **EMULATE** *terminal*

#### *terminal*

Valid terminal types are: TTY, VT52, VT100, VT102, VT220, VT320, ANSI, IBMPC, WYSE75, ATT605, ATT4410, TV922, H19, IBM3101, IBM3161, DGD100, DGD200, DGD210, ADDS60, ADDS90, ADM3, ADM5, ADM31, ESPRIT3, IBM3270, TV910, TV912, TV920, TV925, TV950, TV955, WYSE50 and WYSE100.

#### **Example**

```
emulate VT102
```

Changes emulation to the VT102 terminal type.

## Comments

The **EMULATE** command will clear the screen—if this isn't desirable, use the **VIDSAVE** and **VIDREST** commands to save the old screen and restore it after you've switched emulations.

### See also

**VIDSAVE**, **VIDREST** and **SET EMULATION**.

## **ENDCASE**

---

Concludes the **CASE** command within the **SWITCH** command phrase. See the **SWITCH** command for further information.

### **ENDCASE**

### Example

```
integer resp
atget 5 5 31 1 resp
switch resp
  case 1
    call menu1
  endcase
  case 2
    call menu2
  endcase
  default
    call selecterr
  endcase
endswitch
```

The integer variable **RESP** determines whether to **CALL** either **MENU1** or **MENU2**. If **RESP** is not equal to 1 or 2, the procedure **SELECTERR** is **CALLed** instead.

## **ENDCOMMENT**

---

Marks the end of a comment block; commands which follow are no longer ignored.

### **ENDCOMMENT**

### See also

**COMMENT**.

## **ENDFOR**

---

Concludes the **FOR** command block. See the **FOR** command for further information.

**ENDFOR**

## **ENDIF**

---

Concludes the **IF** command block. See the **IF** command for further information.

**ENDIF**

## **\$ENDIF**

---

Concludes the **IF** command block, allowing conditional compilation by testing for the existence of a **DEFINED** macro name. For more information, see the **DEFINE** command.

**\$ENDIF**

## **ENDPROC**

---

Terminates a procedure block. See the **PROC** command for further information.

**ENDPROC**

### **Comments**

**ENDPROC** always includes a **RETURN** to the **CALLing** procedure; the **RETURN** statement isn't needed.

## ENDSWITCH

---

Terminates the SWITCH command block. See the SWITCH command for further information.

**ENDSWITCH**

## ENDWHILE

---

Terminates the WHILE command block. See the WHILE command for further information.

**ENDWHILE**

## EOF

---

Tests whether or not the end of a file opened with the FOPEN command has been reached.

**EOF** *index intvar*

### Example

```
define true 1
integer testeof=0
fopen 0 "test.fil"
fgets 0 s1
eof 0 testeof
if testeof
    message "EOF reached!"
endif
```

Tests the file corresponding to index number 1 for end-of-file and places the result in the integer variable TEST.

### Comments

The EOF condition becomes TRUE after the first operation that attempts to read past the end of a file. It will remain TRUE until an FSEEK, FCLEAR or REWIND is performed.

The integer variable will be initialized to 0 for "FALSE" and 1 for "TRUE".

The conditional form of this command is "IF/ELSEIF/WHILE EOF INDEX".

### See also

FSEEK, REWIND, IF EOF and FCLEAR.

## EQ

---

Tests two numeric values for equality.

**EQ** *number number intvar*

### Example

integer price,total  
eq price total n1

Tests the the values PRICE and TOTAL, placing the result in the predefined numeric variable N1.

### Comments

The integer variable will be initialized to 0 for "FALSE" and any non-zero value for "TRUE".

The conditional form of this command is "IF/ELSEIF/WHILE EQ NUMBER NUMBER", while the operator form is "NUMBER==NUMBER".

### See also

NEQ.

## ERRORMSG

---

Displays an error message centered in a box on the local screen.

**ERRORMSG** *string*

*string*

A string of up to 80 characters.

### Comments

An error sound accompanies the message. The message can be erased by pressing a key (or waiting two seconds for the message to erase automatically).

### See also

USERMSG and STATMSG.

## EXECUTE

---

Executes another script (either a source program or a compiled script); this process is called “chaining”. The currently executing script terminates without return.

**EXECUTE** *filespec*

*filespec*

Any valid script filename. The file extensions .ASX and .ASP are not required.

### Examples

**execute** "CALL\_tom"

Executes the script file CALL\_TOM.ASX.

**string** next\_file

**get** S0

**switch** S0

**case** "A"

**assign** next\_file "CHOICEA.ASX"

**endcase**

**case** "B"

**assign** next\_file "CHOICEB.ASX"

**endcase**

**default**

**assign** next\_file "DEFAULT.ASX"

**endcase**

**endswitch**

**execute** next\_file

Assigns a filename to NEXT\_FILE based on the value of S0 and executes that file.

### Comments

If the extension is omitted, EXECUTE will first search for a compiled script (with the .ASX extension). If a compiled script that matches the filespec can't be found, EXECUTE will attempt to compile a matching source file (with the .ASP extension). If an .ASP file is specified, ASPECT always attempts compilation.

Only predefined variables (S0-S9, N0-N9) can be used to pass values to an EXECUTEd script; user-defined variables will **not** retain their values.

The script will terminate if the specified filespec doesn't exist or can't be compiled.

## **EXIT**

---

Terminates the executing script file and returns the user to Terminal Mode.

### **EXIT**

#### **Examples**

**transmit "Goodbye"**  
**hangup**  
**exit**

Transmits closing message  
"Goodbye" and disconnects. The user  
is then returned to Terminal mode.

#### **Comments**

CONNECT, TERMINAL and EXIT are all synonyms; all three commands perform the same function.

#### **See also**

BYE, CONNECT, QUIT and TERMINAL.



## EXITFOR

---

Continues execution with the command after an **ENDFOR** command. For further information, see the **FOR** command.

**EXITFOR**

## EXITSWITCH

---

Transfers control from within a **CASE** or **DEFAULT** command block to the line following the **ENDSWITCH** command. **EXITSWITCH** is similar to the "C" language **BREAK** command. For more information, see the **SWITCH** command.

**EXITSWITCH**

## EXITWHILE

---

Continues execution with the command after an **ENDWHILE** command. For further information, see the **WHILE** command.

**EXITWHILE**

## FATSAY

---

Displays formatted text on the local screen at the specified location and with the specified color attributes. **FATSAY** is similar to "printf" in the "C" programming language.

**FATSAY** *row column attribute formatstr [param]...[param]*

*row* - the row at which the text will be displayed. This value is zero-based (0 is the top row of your display, 23 means the 24th row).

*column* - the column at which the first character of the specified text will be displayed. This value is also zero-based.

*attribute* - the video attribute of the displayed text. For a full listing of the available attributes, please refer to the "ASPECT Conventions" section at the beginning of this chapter.

*formatstr* - the format string, which is either a quoted string or a string variable. It may contain not only text but special reserved characters (called "format specifiers") that indicate how to display optional parameters as part of the text. Each format specifier corresponds to a variable or constant (*param*) that appears at the end of the command. For details on the *formatstr* see below.

*param* - an optional variable or constant whose value may be converted to a specified format and displayed as part of the text. This variable or constant may be any valid type; the method by which it's displayed is determined by its corresponding format specifier in the format string. If there are multiple *parameters*, the first *param* corresponds with the first format specifier in the format string, the second variable with the second format specifier and so on. Only those *params* with corresponding format specifiers will be displayed; for example, if there are three *params* and only two format specifiers, the values of only the first two *params* will be displayed.

### Structure of the Format String

The format string consists of zero or more format specifiers interspersed with text. At its simplest, FATSAY could be used to simply display a string (like the AT SAY command). For example, the statement:

```
fatsay 0 0 31 "This is literal text."
```

displays "This is literal text." (without the quotation marks) in high-intensity white on a blue background. The display begins at the first row and first column.

However, the format string may also contain an assortment of format specifiers that correspond with optional variables or constants (*params*) following the format string. Format specifiers and their corresponding *params* are processed from left to right. A format specifier is constructed as follows:

**%[flag][width][.precision]type**

where:

**%** - indicates that this is the beginning of the format specifier (rather than normal text). Characters following this special marker describe the format for displaying the corresponding *param*. If the **%** sign is followed by a character that has no special meaning as a format specifier (if it is not followed by a valid *type*), then that character and any subsequent characters until the next **%** are simply displayed as normal text. To display a percent sign, use **"%%"**.

**flag** - valid flags are "-", "+", " " (a space), and "#". These flags are optional.

"-" left justifies the converted *param* within the number of places indicated in the *width* field. Without this optional flag, the displayed text is right justified.

"+" prefixes the converted *param* with a plus or minus sign (if it represents a signed type). Without this flag, the text will be displayed with a sign only if it represents a negative number.

" " - a space immediately after the % marker prefixes the converted *param* with a space if it represents a signed positive value (the space is ignored if both the blank and "+" flags appear.)

"#" - prefixes the converted *param* with the characters "0x" (if it represents a hexadecimal value) or with "0" (if it represents an octal value). In addition the # flag can be used to force a decimal point for all float conversions (even if there is no fractional portion). This flag is ignored if used with any format *types* other than *x*, *X*, *o*, *f*, *e*, *E*, *g*, or *G*. For example:

Integer num1 = 16

float num2 = 16

```
fatsay 0 0 31 "%+d" num1           ; outputs "+16"
fatsay 1 0 31 "% d" num1           ; outputs " 16"
fatsay 2 0 31 "%#x" num1           ; outputs "0x10"
fatsay 3 0 31 "%#f" num1           ; outputs "16."
```

**width** - this optional value specifies the minimum number of characters that will be generated for the conversion from the corresponding *param*. If the width value is greater than the number of characters in the converted text, it will be padded on the left with spaces (unless this has been altered by one of the *flags*). A 0 immediately preceding the width field pads the converted text with leading zeros after any sign or prefix (as long as no other padding has been specified). Note that since the width field specifies the *minimum* number of generated characters, it will never cause a value to be truncated.

Integer num1 = 16

```
fatsay 0 0 31 "%d" num1             ; outputs "16"
fatsay 1 0 31 "%05d" num1           ; outputs "00016"
fatsay 2 0 31 "%-5d" num1           ; outputs "16 "
```

*precision* - this optional value must always be preceded by a period (.); it specifies the minimum number of digits to display when converting an integer *param* to displayed text, the number of decimal places to display on a float conversion (using the *e*, *E*, or *f* types), the maximum number of significant digits to display on a *g* or *G* conversion or the maximum number of characters to display on a string conversion (using the *s* type). The default precision for floating point values may be specified using the SET DECIMAL statement. The *width* and/or *precision* fields may be an asterisk (\*), which means that the value is supplied from the *param* list following the format string. In this case, the extra *param* would be an integer type preceding the *param* to be converted. Since *precision* specifies the maximum number of digits, it may cause truncation of strings or rounding of floats. For example:

```
string string1 = "This is a string"
```

```
float num1 = 1234.567
```

```
fatsay 0 0 31 "%7.4s" string1 ; outputs " This"
```

```
fatsay 2 0 31 "%-*.f" 8 1 num1 ; outputs "1234.5 "
```

*type* - this specifier determines the data type required of the corresponding *param* (if any) and how the FATSAY command will alter the *param*'s value before converting it to displayed text. Please note that the following *type* specifiers are case sensitive; lower case *types* must be entered in lower case and upper case specifiers must be entered in upper case!

*d* or *i* - *param* is converted to signed decimal notation. The *d* or *i* may be preceded by an *l* (lower case) to specify a long integer type.

*u* - *param* is output as an unsigned decimal number. The *u* may be preceded by an *l* to specify a long unsigned integer type.

*o* - *param* is output in octal notation. The *o* may be preceded by an *l* to specify a long octal type.

*x* - *param* is output in hexadecimal notation using the characters 0-9 and a-f.

*X* - *param* is output in hexadecimal notation using the characters 0-9 and A-F.

*f* - *param* is output in the form [-]dddd.dddd, where dddd is one or more decimal digits. The number of digits displayed after the decimal point is determined by the *precision* specification (see above); the default precision is 2. A minus sign is displayed if the value is less than zero, but a plus sign is displayed only if called for with the "+" flag.

*e* - *param* is output in the form [-]d.ddd *e sign ddd*, where *d* is a decimal digit, *ddd* is one or more decimal digits, *ddd* is three decimal digits, and the *sign* is "+" or "-" (scientific notation).

*E* - same as *e* above, except that this type uses a capital *E* instead of lower case *e* to prefix the exponent.

*g* - *param* is output in *f* or *e* format, as appropriate. If the *e* conversion would yield an exponent greater than -4 or less than the specified precision, the *param* value is output in *f* format instead. The generated text has no trailing zeros in any fraction and includes a decimal point only if there are fractional digits or if you specify the "#" flag.

*G* - same as *g* above, except the *E* output format is used instead of the *e* format.

*c* - integer *param* is output as a single ASCII character.

*s* - string *param* is displayed up to the first null character or until the *precision* value is reached.

Integer num1 = 20, num2 = 30

string string1 = "This is a string"

float float1 = 1234.567

fatsay 0 0 31 "Print %d and %d" num1 num2 ; outputs "Print 20 and 30"

fatsay 0 0 31 "To %d and %#X" num1 num2 ; outputs "To 20 and 0X1E"

fatsay 0 0 31 "%7.4s" string1 ; outputs " This"

fatsay 2 0 31 "%-8.1f" num1 ; outputs "1234.5 "

See also

STRFMT and FSTRFMT.

## FCLEAR

---

Clears all end-of-file and error flags associated with the indicated file index number.

**FCLEAR** *index*

### Examples

**fclear** 0

Clears EOF and error flags for the file corresponding to index 0.

See also

FOPEN and EOF.

## FCLOSE

---

Closes the file corresponding to the provided index.

**FCLOSE** *index*

### Example

**fclose** 0

Closes the file corresponding to index 0.

### Comments

The I/O buffer contents for a file will automatically be written before it's closed (if it was opened in WRITE or APPEND mode).

This command can be tested with the IF SUCCESS statement, returning "FALSE" if an error occurred while closing the file.

### See also

FOPEN and FFLUSH.

## FETCH

---

Returns the current value(s) of any SET command parameter.

**FETCH** *param value*

*param*  
*value*

The desired SET command parameter.

The current value of the specified SET command parameter(s). Note that this value **must** be returned to the proper data type; the variable may be in *intvar*, *strvar* or *longvar* format. The definition for SET includes all possible values for each command parameter.

### Example

**long speed**

**fetch baudrate speed**

Places the current session baud rate into the long variable SPEED.

## Comments

The following terminal emulation types are returned by the **FETCH EMULATION** statement:

TTY	0	DGD210	17
VT52	1	ADDS60	18
VT100	2	ADDS90	19
VT102	3	ADM3	20
VT220	4	ADM5	21
VT320	5	ADM31	22
ANSI	6	ESPRIT3	23
IBMPC	7	IBM3270	24
WYSE75	8	TV910	25
ATT605	9	TV912	26
ATT4410	10	TV920	27
TV922	11	TV925	28
H19	12	TV950	29
IBM3101	13	TV955	30
IBM3161	14	WYSE50	31
DGD100	15	WYSE100	32
DGD200	16		

The following file transfer protocol types are returned by the **FETCH DLXPROTOX/PROTOCOL/ULXPROTOX** statements:

EXTPROTO1	0	YMODEMG	9
EXTPROTO2	1	ZMODEM	10
EXTPROTO3	2	1KXMODEM	11
CISB	3	1KXMODEMG	12
KERMIT	4	ASCII	13
MODEM7	5	IMODEM	14
SEALINK	6	RASCII	15
TELINK	7	WXMODEM	16
YMODEM	8	XMODEM	17

In general, the **FETCHed** value for parameters with **OFF|ON** syntax is "0" for **OFF**, "1" for **ON**; for parameters with **NO|YES** syntax, **FETCHed** values are typically "0" for **NO**, "1" for **YES**.

## See also

**SET.**

## ***FFLUSH***

---

Writes the current I/O buffer contents to the file with the specified index.

**FFLUSH** *index*

### **Example**

**fflush 0**

Writes the I/O buffer contents to the file corresponding to index 0.

### **Comments**

If the file was opened in READ mode, the buffer contents are cleared.

In WRITE or APPEND mode, buffers are automatically flushed when they're full or when the file is closed.

This command can be tested with the IF SUCCESS statement, returning "FALSE" if an error occurred while writing the buffer contents to the file.

### **See also**

FOPEN, FCLEAR and FCLOSE.

## ***FGETC***

---

Reads a character from the file with the specified index into a variable.

**FGETC** *index intvar*

### **Example**

**Integer num**

**fopen 0 "test.fil"**

**fgetc 0 Num**

Reads a character from the file corresponding to index 0 and places it in the integer variable NUM.

### **Comments**

To make sure a character is available, first check the file status using the IF EOF statement or the EOF command.



This command can be tested with the **IF SUCCESS** statement, returning "FALSE" if an error occurred while reading the file.

### See also

**FSEEK**, **FTELL**, **FGETS**, **FCLOSE**, **FPUTC**, **EOF**, **FOPEN** and **FREAD**.

## ***FGETS***

---

Reads a string from the file corresponding to a given index into a variable.

**FGETS** *index strovar*

### Example

**string** info

**fopen** 0 "test.fil" "rt"

**fgets** 0 info

Reads a string from the file corresponding to index 0 and places it in the string variable INFO.

### Comments

The reading will terminate when **FGETS** encounters the end-of-file, a line feed character or when 80 characters have been read.

The string will include the ending line feed (unless you **SET FGETS\_CRLF OFF**). The **IF EOF** statement or **EOF** command can test the file before reading it, and the **IF SUCCESS** statement will return "FALSE" if an error occurred while reading the file.

### See also

**FSEEK**, **FTELL**, **FGETC**, **FCLOSE**, **FPUTS**, **EOF**, **FREAD**, **FOPEN** and **SET FGETS\_CRLF**.

## ***FIND***

---

Tests for an occurrence of the specified text within a variable.

**FIND** *string string [intvar]*

*string*

The second string contains the characters being searched.

**[*intvar*]**

An optional integer variable that's assigned the string index where the desired text was found. The index is zero-based (the first character begins at position 0).

## Examples

**string resp1**

**message "Enter the password:"**

**mget resp1**

Receives information and masks its appearance with asterisks (\*).

**find resp1 "password"**

Tests for the string "PASSWORD" in variable RESP1.

**if not found**

**message "Invalid password"**

**goto secure\_breach**

**else**

**call welcome**

**endif**

## Comments

Case-sensitivity can be controlled with the SET FINDCASE command.

This command can be tested with the IF FOUND statement; FOUND is set to 1 if the text occurs and 0 if it does not occur.

## See also

SET FINDCASE.

## FINDFIRST

---

Locates a disk file using a specification you provide.

**FINDFIRST** *filespec* [*string*]

*string*

An optional string specifying the attributes to be used for the search. If this string is omitted, only "normal" files with no attributes (or just a read-only and/or archive attribute set) will be included. Specifying Hidden ("H"), System ("S") or Directory ("D") will search those files as well as the normal files. If only a Volume label attribute ("V") is used, the volume label is the only item searched; the Volume attribute is ignored when searching with any other attribute (except when searching the root directory of a drive). If a volume label is found, the system variables \$FILENAME and \$FNAME will both contain up to 11 characters of the volume name, and \$FEXT will be set to null.

### Example

**FINDFIRST** "\*.TXT"

Finds the first file in the current directory with an extension of .TXT.

**string** file1="ABC.\*"

Finds the first file in the current directory matching the wildcard specification ABC.\*. A message is displayed if the file is found; note that the system variable \$FNAME is used in the FATSAY statement to display the filename without its extension.

**findfirst** file1

**if** found

**fatsay** 1 1 7 "Got %s" \$fname

**endif**

### Comments

Both wildcards and a full DOS path are accepted as part of *filespec*; FINDFIRST defaults to the current directory if a path isn't provided.

The success of the operation can be tested with the IF FOUND statement.

The file's name, extension, name and extension, size, date stamp, time stamp and attributes are stored in the system variables \$FNAME, \$FEXT, \$FILENAME, \$FSIZE, \$FDATE, \$FTIME and \$FATTR respectively.

**See also**

FINDNEXT.

## ***FINDNEXT***

---

Locates additional disk files with the specification provided in a previous **FINDFIRST** command.

### **FINDNEXT**

#### **Example**

```
string spec="*.txt"
integer another=0
integer arow=1
findfirst spec
if found
    another=1
    fatsay 1 7 "%s" $fname
endif
while another
    ++arow
    findnext
    if found
        fatsay arow 1 7 "%s" $fname
    else
        exitwhile
    endif
endwhile
```

Finds all files in the current directory with the extension \*.TXT, displaying each one without their extension. The **FINDNEXT** command searches the current directory for another filename matching the same specification.

#### **Comments**

The file specification for this command is taken from the previous **FINDFIRST** command. The success of the operation can be tested with the **IF FOUND** statement.

As with **FINDFIRST**, the name, extension, name and extension, size, date stamp, time stamp and attributes are stored in the system variables \$FNAME, \$FEXT, \$FILENAME, \$FSIZE, \$FDATE, \$FTIME and \$FATTR respectively.

**See also**

FINDFIRST.

# FLOAT

---

Defines a global or local float variable.

**Float** *name*[=*expression*][,*name*[=*expression*]]...

[=*expression*]

An initializer expression. It can contain operators, constants or previously-defined variables.

## Examples

**float item**

Defines the float variable **ITEM**.

**float item,cost = 2.32**

Defines the float variables **ITEM** and **COST**. **COST** is initialized to "2.32".

## Comments

Up to 128 *global variables* of each type can be defined (a maximum of 512 total). Global variables are defined anywhere within a source program **outside** of any procedure (typically, this is at the top of a source program, before any procedures appear).

A global variable can be referenced within any procedure; if a procedure changes a global variable, its previous value is not saved.

Globals cannot be passed to another script by chaining—only the predefined **Nx** and **Sx** variables can pass information to another script.

*Local variables* are defined with the same commands as globals; however, they can only be referenced within the procedure where they're defined (unlike globals, which are defined outside of any procedure), and only 128 total local variables (of any type) can be used in a source program.

The same local variable name can be used in more than one procedure, but each occurrence is a completely different case and has no effect on any other occurrences. Local variables will accept initializer expressions (just like global variables).

Global and local variables must be defined before they are referenced; several variable definitions may occur on the same line if each definition is separated with a comma.

## See also

**FLOATPARM**, **LONG**, **STRING** and **INTEGER**.

## FLOATPARAM

---

Defines a float parameter variable.

**FLOATPARAM** *name*[, *name*]...

### Examples

```
proc main
float x=1.1,y=2.2,z=3.3
  call proc2 with x y z
endproc
```

Defines three float values and passes them to a second procedure. Within PROC2, A=1.1, B=2.2 and C=3.3.

```
proc2
  floatparm a, b, c
endproc
```

### Comments

Any procedure—except MAIN—can be defined with up to 10 *parameter variables*. Parameter variables are similar to local variables in that they may only be referenced within the procedure in which they're defined; unlike local variables, though, parameter values are automatically initialized when the procedure is called.

The CALL command allows values to be passed to the procedure being called; these values are used to initialize the parameters upon entering the procedure. Parameter variables must be defined at the top of a procedure (before any commands or local variables are processed), and the order in which they're defined determines the order in which they're read by the CALLED procedure. Additional checking on passed parameters is performed by ASPCOMP during compilation—any inconsistencies will result in error messages.

Several parameters of the same type may be defined on the same source line (if each definition is separated from the next by a comma).

### See also

LONGPARAM, INTPARAM and STRPARAM.

## FLOOR

---

Computes the largest integer value (with no fractional amount) *less than or equal* to a floating point number.

**FLOOR** *float numvar*

**See also**

CEIL.

## FOPEN

---

Opens a file in the indicated mode(s) and assigns it to a file index.

**FOPEN** *index filespec modes*

*filespec*

A valid filename.

*modes*

A string containing the desired access modes. Valid modes are READ ("r"), WRITE ("w") and APPEND ("a"). Valid attributes are TEXT ("t"), BINARY ("b") and READ/WRITE ("+").

### Examples

**fopen 0 "test.txt" "wb"**

Opens the file TEST.TXT in BINARY WRITE mode and assigns it an index number of 0.

**fopen 1 "data.fil" "rt+"**

Opens the file DATA.FIL in TEXT READ/WRITE mode and assigns it an index number of 1.

### Comments

WRITE mode always overwrites (or erases) the contents of an existing file, while APPEND will only allow write operations at the end of an existing file.

TEXT and BINARY determine the translation mode for new lines. In TEXT mode (the default), the carriage return/line feed combination is translated to a single line feed during the read (and the reverse when writing—a line feed is written as a carriage return/line feed pair). In BINARY mode, no translation is performed.

The "+" character can be appended to any mode to allow both READ and WRITE operations on the same file; before switching between READ and WRITE, however, ASPECT requires an FSEEK or REWIND command.

This command can be tested with the IF SUCCESS statement, returning "FALSE" if the file cannot be opened.

The file pointer position is always initially set at the start of the file (no matter what mode or modes you select).

A maximum of 6 files may be opened at once, with index numbers 0 through 5.

### See also

FCLOSE, FTELL, FPUTC, FPUTS, FSEEK, REWIND and FWRITE.

## FOR

---

Repeats a command or series of commands a specific number of times.

```
FOR numvar[=expression] UPTO|DOWNTO number
.
.
.
ENDFOR
```

[=*expression*]

Optional initialization expression for the loop variable.

UPTO|DOWNTO

Indicates whether the variable is to be incremented (by UPTO) or decremented (by DOWNTO) after each iteration. The value is inclusive; if UPTO is set to 25 and the variable is initialized to 1, the loop will be performed 25 times.

ENDFOR

Required terminator for the FOR command block.

### Example

```
for row=1 upto 25
  call bat
endfor
```

Performs the BAT procedure and increments the value of ROW by 1 until ROW=25. Since ROW is initialized to 1, the loop will be performed 25 times.



## Comments

The **LOOPFOR** and **EXITFOR** commands allow branching to the next iteration test or command following the **ENDFOR**.

## See also

**WHILE**, **LOOPFOR** and **EXITFOR**.

## ***FPUTC***

---

Writes an ASCII character value to the indicated file.

**FPUTC** *index character*

*character*

The character can be any ASCII value.

## Comments

This command allows the addition of a carriage return/line feed pair to the end of any string. For example, if a file was opened with the command **FOPEN 0 "filename" "wt"**, a string written with **FPUTS** could be terminated with a line feed with the statement **FPUTC 0 10**.

This command can be tested with the **IF SUCCESS** statement, returning "FALSE" if the data cannot be written to the file.

## See also

**FOPEN**, **FPUTS** and **FWRITE**.

## ***FPUTS***

---

Writes a string to the file corresponding to the specified index.

**FPUTS** *index string*

## Comments

**FPUTS** should only be used on strings terminating in one or more nulls; otherwise, use the **FWRITE** command.

This command can be tested with the **IF SUCCESS** statement, returning "FALSE" if the data cannot be written to the file.

## See also

**FOPEN**, **FPUTC** and **FWRITE**.

## FREAD

---

Reads a block of data from a file into a string variable and returns the actual number of bytes read in a third integer variable.

**FREAD** *index strvar length intvar*

<i>strvar</i>	String variable that will hold the results of the read.
<i>length</i>	The size in bytes of the block to be read (an integer value between 1 and 80).
<i>intvar</i>	Return value is the actual number of bytes read, which may be less than requested if an error occurs or end-of-file is reached.

### Example

**fread 0 S1 40 N3**

Reads 40 bytes from the file indexed as 0 into S1 and puts the "return value" into N3.

### Comments

The status of this command can be checked by comparing the number of bytes read with the number requested; alternately, you can test for the end-of-file condition.

To test for errors while reading a file, use the **IF SUCCESS** and **IF FAILURE** statements.

### See also

**FGETC**, **FGETS** and **FOPEN**.

## FSEEK

---

Repositions the file pointer for the file corresponding to the specified index.

**FSEEK** *index long integer*

<i>long</i>	Offset of the new position relative to the origin of the seek; the value can be positive or negative.
-------------	---

***integer***

The origin of the seek operation. Possible values are 0 (beginning of the file), 1 (current pointer position) or 2 (end-of-file).

**Example**

**fseek 3 100 1**

Positions the pointer within the file corresponding to index 3. The pointer will move forward 100 bytes from the current location.

**Comments**

Attempting to reposition the file pointer before the beginning of the file will result in an error.

When using this command with a TEXT file, seek with an offset of 0 relative to any of the origin values *or* seek with an offset from a previous FTELL command relative to the beginning of the file.

This command can be tested with the IF SUCCESS statement, returning "FALSE" if seek errors occur.

**See also**

FTELL, FOPEN and REWIND.

## ***FSTRFMT***

---

Similar to STRFMT and FATSAY, this command writes a formatted string to the file referenced by the provided index number.

**FSTRFMT** *index formatstr [param]...[param]*

**Example**

**integer inum**

**fstrfmt 0 "ITEM no. %d" inum**

Writes the string to the file indexed as 0 with value substitution (as indicated by the format specifiers).

**Comments**

For more information on the format specifiers available for FSTRFMT, please refer to the definition for the FATSAY command.

This command can be tested with the **IF SUCCESS** statement, returning "FALSE" if the data cannot be written to the file.

### See also

STRFMT and FATSAY.

## ***FTELL***

---

Returns the current file pointer position of the file corresponding to the specified file index into a long variable.

**FTELL** *index longvar*

### Example

**long loc**  
**ftell 2 loc**

Returns the pointer position of the file corresponding to index 2 into the long variable LOC.

### Comments

The long variable contains the number of bytes past the beginning of the file.

If the file is opened in TEXT mode, carriage return/line feed translations may cause the physical offset to be incorrectly reported; however, FTELL can be used together with FSEEK to store and return to a particular file location.

### See also

REWIND, FOPEN and FSEEK.

## ***FTOA***

---

Converts a float to an ASCII string and stores it in a string variable.

**FTOA** *float strovar*

### See also

ATOF.

## ***FWRITE***

---

Writes a block of data to a file.

**FWRITE** *index string length*

*string*

A string or string variable that contains the block to be written.

*length*

The size in bytes (an integer value between 1 and 80) of the block to be written.

### **Example**

**string block1**

Writes 30 characters from BLOCK1 to the output file specified by index 0.

**fwrite 0 block1 30**

### **Comments**

This command can be tested with the **IF SUCCESS** statement, which returns "FALSE" if the string cannot be written.

### **See also**

**FOPEN**, **FSEEK**, **FREAD**, **FSTRFMT**, **FPUTC** and **FPUTS**.

## ***GE***

---

Performs relational testing ("greater than or equal to") on two numeric values.

**GE** *number number intvar*

### **Comments**

The integer variable will be initialized to 0 for "FALSE" and 1 for "TRUE".

The conditional form of this command is "IF/ELSEIF/WHILE GE NUMBER NUMBER", and the symbol ">=" acts as the operator form.

### **See also**

**LT**, **GT** and **GE**.

## GET

---

Receives and stores a text string or number up to 80 characters in length, entered by the user at the keyboard.

**GET** *strovar* | *numvar* [*length*]

*length*

A numeric value which determines the maximum number of characters to be accepted. If this optional parameter is omitted, the default value of 80 characters is used. A beep will sound if the user attempts to enter more than the specified number of characters.

### Example

**get s3 1**

Stores a single keystroke entered by the user in the predefined string variable S3.

### Comments

When responding to a GET command, the user must enter a carriage return to signal the completion of the input. The carriage return is not included in the text string stored in a string variable.

GET accepts only ASCII characters; function keys and non-displayable characters are not allowed.

The cursor position will remain at the location where the user pressed **Enter** or **Esc**.

GET can be exited with the **Esc** key (the statement **IF FAILURE** returns "TRUE").

For more information, see the ATGET command.

### See also

ATGET, KEYGET, MATGET, MGET and RGET.

## GETCUR

---

Returns the cursor's current row and column values into the first and second numeric variables, respectively.

**GETCUR** *intoar intoar*

### Example

**getcur** rows cols

Places the current cursor row and column values in the numeric variables ROWS and COLS.

### Comments

These values are also available directly through the system variables \$ROW and \$COL.

The LOCATE command can restore a cursor position saved with GETCUR.

### See also

LOCATE, \$ROW and \$COL system variables.

## GETDIR

---

Returns the current working directory path of the specified drive into a string variable.

**GETDIR** *disk stroar*

*disk*

An integer number designating the drive; 0 indicates the current drive, 1 specifies drive A, 2 for drive B and so on.

### Example

string path  
**getdir** 0 path

Places the working path and directory for the current drive into the string variable PATH.

## Comments

You can test for possible drive access errors with the statements **IF SUCCESS** or **IF FAILURE**.

## See also

**FINDFIRST**, **FINDNEXT**, **DISKFREE** and **CHDIR**.

# GETENV

---

Returns the contents of an environment variable definition into a string variable.

**GETENV** *string strvar*

*string*

An environment variable currently defined through DOS.

## Example

**string env**

**getenv "pcplus" env**

Places the current value for the environment variable **PCPLUS** into the string variable **ENV**.

## Comments

**GETENV** returns a null string if the environment variable doesn't exist.

The environment variable is forced uppercase (even if supplied in lowercase).

## See also

**PUTENV**.

# GETFATTR

---

Returns the attributes of a specified file into a string variable.

**GETFATTR** *filespec strvar*

*filespec*

A fully-qualified single filename; wildcards are not allowed.



**Example****getfattr "RBBS.LOG" attr**

Places the current attributes for the file RBBS.LOG into the string variable ATTR.

**Comments**

Attributes can include "R" (Read-Only), "H" (Hidden), "S" (System), "A" (Archive), "D" (Directory) and "V" (Volume).

The statements **IF SUCCESS** or **IF FAILURE** can test for the successful return of the attribute information.

**GETFDATE**

---

Returns the date stamp of a specified file into a string variable.

**GETFDATE** *filespec* *strvar*

*string*

A fully-qualified single filename; wildcards are not allowed.

**Example****getfdate "MLC.DAT" bdate**

Places the date stamp (in the format xx-xx-xx) of the file MLC.DAT into the string variable BDATE.

## GETFILE

---

Receives (or “downloads”) a file from a remote computer using the indicated transfer protocol.

**GETFILE** *protocol* [*filespec*]

*protocol*

The following protocols do not require a *filespec*:

EXTPROTO1  
EXTPROTO2  
EXTPROTO3  
YMODEM  
YMODEMG  
SEALINK  
KERMIT  
TELINK  
MODEM7  
ZMODEM  
CISB

The following protocols do require a *filespec*:

1KXMODEM *filespec*  
1KXMODEMG *filespec*  
IMODEM *filespec*  
XMODEM *filespec*  
WXMODEM *filespec*  
ASCII *filespec*  
RASCII *filespec*

### Examples

**waitfor "Begin transfer!"**  
**getfile zmodem**

Uses GETFILE with ZMODEM.

**waitfor "Kermit-32>"**  
**message "Enter file to transfer"**  
**get S1**  
**transmit "SEND"**  
**transmit S1**  
**transmit "^M"**  
**getfile kermit**

Uses GETFILE with KERMIT.

## Comments

Note that many of the protocols require either a valid DOS filespec or a variable containing a filespec. A path may be specified; if omitted, PROCOMM PLUS uses the default download directory specified in Setup. For the other protocols, a filespec should *not* be specified, since the remote system supplies the filename.

GETFILE can be tested with the IF SUCCESS and IF FAILURE statements.

Pre-existing files can pose a problem if you're using the ZMODEM transfer protocol. If a file you're receiving already exists and *crash recovery* is not enabled, the file will be skipped—however, the IF SUCCESS statement will still return a value of "TRUE". To avoid this, use the ISFILE command to determine if the file already exists on your system before the transfer—then delete it before using GETFILE. For more information on crash recovery, see "ZMODEM Protocol Options" in Chapter 8 of your USER MANUAL.

See the appendix "File Transfer Protocols" in your USER MANUAL for more information on each protocol. For the numeric values returned by a FETCH PROTOCOL statement, please refer to the definition for FETCH in this chapter.

## See also

SENDFILE.

# GETFSIZE

---

Returns the size of a specified file into a long variable.

**GETFSIZE** *filespec longvar*

*filespec*

A fully-qualified single filename; wildcards are not allowed.

## Example

**long size**

**getfsz "pcplus.dir" size**

Places the size of the file PCPLUS.DIR (in bytes) into the long variable SIZE.

## Comments

GETFSIZE can be tested with the IF SUCCESS and IF FAILURE statements.

## GETFTIME

---

Returns the time stamp of a specified file into a string variable.

**GETFTIME** *filespec strovar*

*filespec*

A fully-qualified single filename; wildcards are not allowed.

### Example

string ft

getftime "ROB.TXT" ft

Places the time stamp (in military 24-hour format) of the file ROB.TXT into the string variable FT.

## GETVATTR

---

Returns the display attribute from the specified screen coordinates into an integer variable.

**GETVATTR** *row column intvar*

### Example

integer color

getvattr 5 8 color

Places the attribute for the character at row 5, column 8 into the numeric variable COLOR.

### See also

GETVCHAR and PUTVATTR.

## GETVCHAR

---

Returns the decimal value of a character from the specified screen coordinates into an integer variable.

**GETVCHAR** *row column intvar*

**Example**

integer letter  
 getvchar 9 1 letter

Places the decimal value of the character at row 9, column 1 into the numeric variable LETTER.

**See also**

GETVATTR and PUTVCHAR.

## **GOSUB**

---

Provides an unconditional branch to the specified procedure with return.

**GOSUB** *name* [WITH *param*[*param*]...[*param*]]

**Comments**

GOSUB is a synonym for the CALL command. It has been retained for backward compatibility with previous versions of PROCOMM PLUS—however, since GOSUB may be removed in future versions of ASPECT, it's recommended that you use CALL instead.

**See also**

CALL.

## **GOTO**

---

Performs an unconditional branch to the specified label within the current procedure.

**GOTO** *name*

*name*

A label within the current procedure. Labels provide a point to which the GOTO command directs program control.

## Example

```

If not waitfor
    goto error_exit
endif
.
.
.
error_exit:
    message "Abnormal termination"
    hangup
    quit

```

## Comments

When PROCOMM PLUS encounters a GOTO command, it jumps to the location where the label is defined, resuming execution with the command immediately following the label.

A label can only be referenced within the procedure where it's defined (for non-local branching, use the SETJMP and LONGJMP commands). Labels can't be placed between CASE statements in a SWITCH command block, or between procedure blocks.

## See also

SETJMP, LONGJMP and CALL.

# GT

---

Performs relational testing ("greater than") on two numeric values.

**GT** *number number intvar*

## Comments

The integer variable will be initialized to 0 for "FALSE" and any non-zero value for "TRUE".

The conditional form of this command is "IF/ELSEIF/WHILE GT NUMBER NUMBER", and the symbol ">" acts as the operator form.

## See also

GT and LE.

## **HANGUP**

---

Disconnects your computer from the telephone line by dropping your modem's Data Terminal Ready (DTR) line. The command then tests the Carrier Detect (CD) and, if the modem is still connected, sends the hang-up string defined in Setup.

### **HANGUP**

#### **Example**

**hangup**

Disconnects the telephone line.

#### **Comments**

The default hang-up string (which should work for Hayes and compatible modems) is ~~~~+~~~ATH0^M. Use the IF CONNECTED statement to determine if the disconnect was successful.

#### **See also**

SET MODEM HANGUP.

## **HELP**

---

Displays the PROCOMM PLUS Command Menu help screen, allowing access to On-line Help.

### **HELP**

## **HOME**

---

Moves the cursor to the first row and column on the screen.

### **HOME**

#### **See also**

CURDN, CURLF, CURRT, CURUP and RCA.

## HOOK

---

Executes an external program, passing the segment and offset of the current PROCOMM PLUS Setup structure as an argument.

**HOOK** *string*

### Example

**hook "FASTXFER"**

Executes the external program FASTXFER.

### Comments

HOOK allows you to execute external programs specifically written to utilize and/or change information on the current settings in PROCOMM PLUS, including the current COM port and baud rate.

HOOK can also utilize and/or change the values in the predefined variables (S0 to S9 and N0 to N9), allowing an information channel between HOOKed programs and currently-executing scripts.

### See also

METAKEY, RUN and EXECUTE.

## HOST

---

Places PROCOMM PLUS in Host mode.

**HOST**

### Comments

By creating a script containing this command, you can automatically switch to Host mode when you start PROCOMM PLUS (or you can start PROCOMM PLUS in Host mode at a particular time).

You can test the HOST command for **SUCCESS** or **FAILURE**; **FAILURE** is set if a privileged user aborted Host mode or if the (**Esc**) key was pressed to abort Host.

Several system variables can provide information on the last caller that successfully logged on to Host; see the section titled "System Variables" at the end of this chapter.



## IF

---

Executes the commands on the following line if the *condition* is true.

```

IF condition
.
.
.
[ELSEIF condition]
.
.
.
[ELSE]
.
.
.
ENDIF

```

**ELSE**

Commands on the lines following this command are executed when the condition tested by the IF command is "FALSE".

**ELSEIF**

Branches to another IF command block.

**ENDIF**

Concludes the IF command phrase.

A condition consists of a command word and its parameters or a numeric expression; you may also include the optional **NOT** and **ZERO** parameters. If a command or expression is evaluated as a non-zero value, it was satisfied (or "TRUE"). A zero value indicates that the conditional test was not satisfied (or "FALSE").

[**NOT** | **ZERO**] {expression | math | EOF index | NULL strvar}

**NOT** - May be employed with any condition. The effect of the **NOT** is to reverse the value of the condition. For example, when **CONNECTED** is "TRUE", then **NOT CONNECTED** is "FALSE". The conditions **NOT SUCCESS** and **FAILURE** are exactly the same.

**ZERO** - Tests whether a numeric variable has a value of zero. **ZERO** and **NOT** are functionally equivalent.

**math** - Can be one of the following: **ADD**, **AND**, **ANDL**, **COMP**, **DEC**, **DIV**, **EQ**, **GE**, **GT**, **INC**, **INIT**, **LE**, **LT**, **MOD**, **MUL**, **NEG**, **NEQ**, **NOT**, **OR**, **ORL**, **SHL**, **SHR**, **SUB**, **XOR** or **ZERO**. For most of these commands, the required parameters should be included except for the "result" variable; **DEC**, **INC** and **INIT** require all parameters in the condition. For more information on math commands, please refer to the Operator Appendix and their definitions elsewhere in this chapter.

**condition** - commonly-used conditions for the **IF** command include the following system variables and commands: **CONNECTED**, **COMDATA**, **FROMDDIR**, **EOF index**, **FAILURE**, **FOUND**, **HITKEY**, **MONO**, **NULL string**, **SUCCESS** and **WAITFOR**.

The **CONNECTED** condition is true if **CD** (Carrier Detect) is high. **CD** is normally high only when you're connected to a remote system. If your modem forces **CD** high (usually a dip switch setting) the **CONNECTED** condition will always be "TRUE".

The **EOF** condition tests for the end-of-file on the file corresponding to the provided index number. See the definition for **EOF** for more information.

The **FAILURE** condition is considered "TRUE" if the last tested command was not successfully completed.

The **FOUND** condition is used to test the result of the last **FIND** command executed. It is considered "TRUE" if the "target" was found in the specified string variable. Please see the **FIND** command for further information.

The **HITKEY** condition is considered "TRUE" if a key has been pressed and remains in the input buffer.

If you execute a script from a Dialing Directory entry, the **FROMDDIR** condition will be "TRUE" anywhere within that script. The primary use for **FROMDDIR** is to allow a script to be executed either independently or "attached" to a Dialing Directory entry.

The **MONO** condition is evaluated as "TRUE" if a monochrome monitor is connected.

The **NULL** condition tests a string for no contents. See the definition for **NULL** for more information.

The **SUCCESS** condition is evaluated as "TRUE" if the last testable command was successfully completed.

The **WAITFOR** condition checks the result of the last **WAITFOR** command. If the "target" specified in the **WAITFOR** command is received, the **WAITFOR** condition is "TRUE"; if the **WAITFOR** command times out before receiving the "target", the condition is "FALSE". For more information, please refer to the definition of the **WAITFOR** command.

## Examples

```
run "someprog"
if success
```

Executes if the program SOMEPROG ran successfully.

```
    .
    .
    .
```

```
endif
```

Execution loops endlessly until a key is pressed.

```
loop:
while not hitkey
endwhile
```

Does not execute if the script file was started via a Dialing Directory link.

```
if not fromddir
    dial "5"
```

```
endif
```

This segment will loop until N1 = 0.

```
init n1 10
while (n1!=0)
```

```
    .
    .
    .
```

```
    --n1
endwhile
```

Executes the CLEAR command if a monochrome monitor is connected.

```
if mono
    clear 7
endif
```

Branches to a subroutine if the value of TOTAL is greater than or equal to 25.

```
if total > 25
    call printdata
endif
```

## Comments

Each IF command must end with an ENDIF command and can optionally be used with an ELSE or ELSEIF command. The command following the ELSE is executed if the specified condition evaluates as "FALSE".

There is no practical limit on the number of nested IF commands within a script.

## See also

ELSE, ELSEIF, ENDIF and SWITCH.

## **\$IFDEF**

---

Allows conditional compilation by testing for the existence of a **DEFINED** macro name. For more information, see the **DEFINE** command.

**\$IFDEF**

## **INC**

---

Increments a numeric variable by one.

**INC** *numvar*

### **Comments**

It is possible to increment a number beyond the range of valid integers; **PROCOMM PLUS** does no error checking on this value.

The operator form of "INC N0" is "N0++".

### **See also**

**DEC** and **ADD**.

## **INCLUDE**

---

Merges commands from **ASPECT** source files during compilation.

**INCLUDE** "*filespec*"

### **Example**

**include** "color.h"

Merges the commands found in the file **COLOR.H** with the current script. Note that this must be a quoted string.

### **Comments**

Each **INCLUDE** may contain further **INCLUDE** commands. You can nest **INCLUDE** commands up to 10 levels deep.

**INCLUDE** commands can occur within or outside of a procedure block.

INCLUDE can be used to set up source “header” files—much like the “C” programming language—which contain a set of **DEFINE** commands; you can easily **INCLUDE** these header files in different **ASPECT** scripts without having to duplicate the work.

Another use of **INCLUDE** is the creation of a “library”—procedures commonly found in many of your scripts. Since **ASPCOMP** will not generate output for procedures that aren’t called, your library can be as large as you like without adding to the size of the compiled **.ASX** script.

The filespec must be a quoted string, but it does not require the **.ASP** extension.

### See also

**DEFINE**.

## INIT

---

Initializes a numeric variable.

**INIT** *numvar number*

### Examples

**init N0 330**  
**init N1 N0**

Initializes **N0** to 330 and then also initializes **N1** to 330. The *operator* form of the first statement would be **N0=330**.

### Comments

It is possible to initialize a variable outside of the valid range allowed by the numeric variable; **ASPECT** does no error checking on this value. Values outside of the valid range will be truncated to fit the variable limits.

The operator form of the statement “**INIT N0 330**” is “**N0=330**”.

### See also

**ASSIGN** and **STRCPY**.

## IMPORT

---

Reads data from the specified I/O port.

**IMPORT** *port intvar*

### Examples

**Import 0x3f8 char**

Reads a byte from the port with address 0X3F8 into the integer variable CHAR.

### Comments

The first integer identifies the port address (in decimal or hex format). The value is treated as unsigned, ranging from 0 to 65535. Port values greater than 32767 must be entered as hexadecimal.

### See also

OUTPORT.

## INSCHAR

---

Inserts a character at the current cursor position. Any text from the current cursor to the end of the line will be shifted one column to the right.

**INSCHAR**

### See also

DELCHAR, DELLINE and INSLINE.

## INSLINE

---

Inserts a new line at the current cursor position. Any text on the current line will be scrolled up to the previous line.

**INSLINE**

### See also

DELCHAR, DELLINE and INSCHAR.

## INTEGER

---

Defines a global or local integer variable.

**INTEGER** *name*[=*expression*][,*name*[=*expression*]]...

[=*expression*]

An initializer expression. For numeric types, it can specify operators, constants or previously-declared numeric variables.

### Examples

**integer item**

Defines the integer global variable **ITEM**.

### Comments

For more information on using *global* and *local* variables, please refer to the definition for **FLOAT**.

### See also

**INTPARM**, **LONG**, **FLOAT** and **STRING**.

## INTPARM

---

Defines a integer parameter variable.

**INTPARM** *name*[,*name*]...[,*name*]

### Examples

**intparm count**

Defines the integer parameter **COUNT**.

### Comments

Any procedure—except **MAIN**—can be defined with up to 10 *parameter variables*. Parameter variables are similar to local variables in that they may only be referenced within the procedure in which they're defined; unlike local variables, though, the value of parameters are automatically initialized when the procedure is called.

For more information on using parameter variables, please refer to the definition for **FLOATPARM**.

**See also**

LONGPARM, FLOATPARM and STRPARM.

**ISFILE**

---

Determines if a file exists in the current (or specified) directory.

**ISFILE** *filespec*

*filespec*

Any valid DOS path and/or filename, including extension.

**Examples**

```
isfile "MARK.DOC"
```

```
if success
```

```
    message "Doc file exists"
```

```
else
```

```
    message "Doc file not found"
```

```
endif
```

```
message "Enter filename"
```

```
get S0
```

Variable S0 stores the filename.

```
isfile S0
```

```
if not success
```

```
    message "File does not exist"
```

```
endif
```

**Comments**

You can include a path specification with the filespec. Use the IF SUCCESS and IF FAILURE statements to test the results of the ISFILE command.

**ITOA**

---

Converts an integer to an ASCII string and stores it in a string variable.

**ITOA** *integer stroar*

**See also**

FTOA, LTOA, ATOI and STRFMT.



## KERMSERVE

---

Issues a KERMIT server command.

**KERMSERVE** {*SENDFILE filespec*|*GETFILE filespec*|*FINISH*|*LOGOUT*}

<b>SENDFILE</b> <i>filespec</i>	Sends a file to a remote system. <i>filespec</i> is any valid DOS filename, including the extension.
<b>GETFILE</b> <i>filespec</i>	Receives a file from a remote system. <i>filespec</i> is any filename that's valid on the remote system.
<b>FINISH</b>	Logs out of KERMIT server mode.
<b>LOGOUT</b>	Logs out of KERMIT server mode <i>and</i> logs off Host.

### Example

```
message "File to send?"
get sfil
kermserve sendfile sfil
kermserve finish
```

Stores the filename in variable SFIL, transfers the file and issues the FINISH SERVER command.

### Comments

This command phrase will only work if the host is in the KERMIT server mode.

KERMSERVE can be tested with the IF SUCCESS and IF FAILURE statements.

## KEY2ASCII

---

Converts an integer to the ASCII character it represents and places the result into a string variable.

**KEY2ASCII** *integer strovar*

### Example

```
string charcd
integer numval
key2ascii numval charcd
```

Reads the value of the numeric integer NUMVAL and places the corresponding ASCII character in the string variable CHARCD.

## Comments

If the integer value is greater than 255, it's converted to a 4-digit hexadecimal string.

## See also

TERMKEY, SET KEYS and KEYGET.

# KEYGET

---

Receives a key pressed by the user and (if requested) stores it in the specified integer variable.

**KEYGET** [*intvar*]

## Comments

This command lets you get a single keystroke without requiring that the user terminate a series of keystrokes by pressing **Enter** (which is necessary with GET). The value placed in the numeric variable depends upon the key pressed.

To place the ASCII character corresponding to a key value into a string variable, use the KEY2ASCII command.

The **Alt-Z** key sequence will always call On-line Help, and will not be returned as a key code; it will remain in effect until the user presses a key other than **Alt-Z**.

## See also

KEY2ASCII, GET, MATGET, TERMKEY, SET KEYS, MGET and RGET.

# KFLUSH

---

Clears accumulated keystrokes from the keyboard buffer. Any unprocessed keystrokes that have been entered will be lost.

**KFLUSH**

## See also

KEYGET, HITKEY system variable and RFLUSH.

## KLOAD

---

Loads a different Keyboard Map file.

**KLOAD** *filespec*

### Comments

The .KBD file extension is optional.

If the directory does not exist (either in the current directory or in the directory specified with the "SET PCPLUS=" environment variable), KLOAD will create an empty directory with that name.

## LE

---

Performs relational testing ("less than or equal to") on two numeric values.

**LE** *number number intovar*

### Example

```
integer price, subtotal
price=117
subtotal=15
le price subtotal n1
```

Tests the the values PRICE and SUBTOTAL, placing the result in the predefined numeric variable N1. Since 117 is **not** less than or equal to 15, N1 will be initialized to 0.

### Comments

The integer variable will be initialized to 0 for "FALSE" and 1 for "TRUE".

The conditional form of this command is "IF/ELSEIF/WHILE LE NUMBER NUMBER", and the symbol "<=" acts as the operator form.

### See also

LT, GT and GE.

## LINEFEED

---

Moves the cursor down one line. If the current line is the last line of the screen, this command may scroll the screen (depending on the current emulation and the **SET SCROLL** option).

### LINEFEED

**See also**

CURDN.

## LOCATE

---

Positions the screen cursor to the location specified by *row* and *column*.

**LOCATE** *row column*

### Example

```
clear
locate 10 20
message "Enter choice:"
locate 10 44
get S8
```

Clears the screen and locates the cursor at row 10, column 20.

Displays the message.

Positions the cursor at row 10, column 44 (at the right of the prompt) for user input.

### Comments

Characters received from the remote system are displayed at the current cursor position.

Note that some commands (like **BOX**) write directly to the screen (without affecting the current cursor location); other commands (like **TERMWRT**) update the cursor location when executed.

**See also**

GETCUR, \$ROW and \$COL system variables.

# LOG

---

Controls session logging during script file execution. The log file is a continuous record of all characters received and transmitted. Note that a SET DISPLAY OFF command in a script will disable the log file.

**LOG** {**OPEN** [*filespec*] | **CLOSE** | **SUSPEND** | **RESUME**}

## **OPEN**

Opens the log file and begins logging data. This parameter can be tested for successful completion with IF SUCCESS | FAILURE.

## **[filespec]**

The optional filename lets you specify the log filename. If this parameter is not included in the command, PROCOMM PLUS uses the default filename specified using the Setup facility (see "File/Path Options" in Chapter 8 of your USER MANUAL).

## **CLOSE**

Turns off file logging and closes the log file.

## **SUSPEND**

Temporarily halts logging of text without closing the log file.

## **RESUME**

Continues logging after a SUSPEND command.

## **Examples**

**log open**

Begins logging to default log file.

**log open "newlog.txt"**

Begins logging to file NEWLOG.TXT.

**LOG SUSPEND**

.

.

.

**LOG RESUME**

## **Comments**

If the log file already exists, the new data is added to the end of the existing file.

## **See also**

SET DISPLAY and SNAPSHOT.

## LONG

---

Defines a global or local long variable.

**LONG** *name*[=*expression*][,*name*[=*expression*]]...

[=*expression*]

An initializer expression. It can specify operators, constants or previously-declared numeric variables.

### Examples

**long** *location*

Defines the long variable **LOCATION**.

### Comments

For more information on using *global* and *local* variables, please refer to the definition for **FLOAT**.

### See also

**LONGPARM**, **INTEGER**, **FLOAT** and **STRING**.

## LONGJMP

---

Returns to a location within a script previously marked with a **SETJMP** command.

**LONGJMP** *index integer*

*index*

One of three integer index values (0,1 or 2); the value identifies the **SETJMP** location for this **LONGJMP**.

*integer*

An integer value to return to the **SETJMP** command; this allows further processing by statements following the **SETJMP**.

### Example

**longjmp** 0 2

Returns to the **SETJMP** location referenced by the index number 0. The **SETJMP** command's second parameter will receive the integer value 2.

## Comments

The marked location is the command following the **SETJMP**. Up to three **SETJMP** locations can be active at once.

The marked location remains active until a return from the function where it was set—or until another routine uses a **SETJMP** with the same index.

## See also

**GOTO**, **RETURN** and **SETJMP**.

# LONGPARAM

---

Defines a long parameter variable.

**LONGPARAM** *name*[,*name*]...[,*name*]

## Examples

**longparam memory**

Defines the long parameter  
**MEMORY**.

## Comments

Any procedure—except **MAIN**—can be defined with up to 10 *parameter variables*. Parameter variables are similar to local variables in that they may only be referenced within the procedure in which they're defined; unlike local variables, though, the value of parameters are automatically initialized when the procedure is called.

For more information on using parameter variables, please refer to the definition for **FLOATPARM**.

### See also

**INTPARM**, **FLOATPARM** and **STRPARM**.

## LOOPFOR

---

Increments or decrements the control variable in a **FOR** command block. If another iteration should be performed, execution continues with the command following the **FOR** command. See the **FOR** command for further information.

### LOOPFOR

## LOOPWHILE

---

Increments or decrements the control variable in a **WHILE** command block. If another iteration should be performed, execution continues with the command following the **WHILE** command. See the **WHILE** command for further information.

### LOOPWHILE

## LT

---

Performs relational testing ("less than") on two numeric values.

**LT** *number number intvar*

### Example

```
integer price,subtotal  
price=10  
subtotal=15  
lt price subtotal n1
```

Tests the the values **PRICE** and **SUBTOTAL**, placing the result in the predefined numeric variable **N1**. Since 10 is less than 15, **N1** will be initialized to a non-zero value.

### Comments

The integer variable will be initialized to 0 for "FALSE" and any non-zero value for "TRUE".



The conditional form of this command is "IF/ELSEIF/WHILE LT NUMBER NUMBER", and the symbol "<" acts as the operator form.

### See also

GT and LE.

## LTOA

---

Converts a long to an ASCII string and stores it in a string variable.

**LTOA** *long strovar*

### See also

ATOL.

## MATGET

---

Relocates the cursor to a specified row and column, gets a text string or number entered by the user at the keyboard and stores it in the specified variable. The input is masked by echoing asterisks (\*) on the screen.

**MATGET** *row column attribute length strovar|numvar*

**length**

A numeric value between 1 and 80 that determines the maximum number of characters that will be accepted. A beep will sound if the user attempts to enter more than the specified number of characters.

**strovar|numvar**

The variable where the text string or number is stored.

### Comments

This command is similar to ATGET; however, MATGET masks the input data.

The cursor position will remain at the location where the user pressed **Enter** or **Esc**.

MATGET can be exited with the **Esc** key (FAILURE is set "TRUE").

**See also**

ATGET, GET, KEYGET, and MGET.

**MDIAL**

---

Calls the specified telephone number ("manual dial").

**MDIAL** "[ldcode]number[ldcode]" | *stroar* [*message*]

<i>number</i>	The telephone number of the computer you want to call.
<i>ldcode</i>	A dialing code (see "Adding or Changing a Dialing Code" in Chapter 6 of your USER MANUAL).
<i>stroar</i>	A variable, which you can set to a valid telephone number and use in place of a quoted string.
[ <i>message</i> ]	An optional string displayed in the Directory window while PROCOMM PLUS is dialing the number. This string typically contains the name of the BBS or on-line service you're calling.

**Examples**

<b>mdial "555-1234"</b>	Dials the telephone number 555-1234.
<b>mdial "A555-1234"</b>	Dials dialing code A and then the telephone number 555-1234.
<b>if not fromddir</b> <b>mdial "555-1234" "WORK"</b> <b>endif</b>	Calls the telephone number 555-1234 (unless the script file is executed via the Dialing Directory). The message "WORK" appears in the directory window while the number is dialed.

**Comments**

Use the **IF NOT FROMDDIR** statement to prevent the **MDIAL** command from redialing if the script file being executed is linked to a Dialing Directory entry (see the last example above).

**MDIAL** accepts only a single telephone number; for multiple Dialing Directory entry numbers, use the **DIAL** command.

**See also**

**DIAL** and **REDIAL**.

## MEMFREE

---

Returns the amount of free memory (or RAM) available for running other programs into a long variable.

**MEMFREE** *longvar*

### Example

long mem

memfree mem

fatsay 10 20 30 "%ld bytes" mem

Returns the current free RAM available into the long variable MEMORY.

### See also

DISKFREE.

## MEMPEEK

---

Returns the value of a single byte at the specified memory address.

**MEMPEEK** *segment offset intvar*

### Example

mempeek 0 0x0417 byte

Returns the value of the byte at segment 0, offset 0x0417 into the integer variable BYTE.

### Comments

Both segment and offset can be entered in decimal or hex form; they're treated as unsigned values.

### See also

MEMPOKE and MEMREAD.

## MEMPOKE

---

Sets the value of a single byte at the specified memory address.

**MEMPOKE** *segment offset character*

### Example

**mempoke 0x40 0x1E byte**

Sets the value of the byte at segment 0x40, offset 0x1E to the value specified in BYTE.

### Comments

Both segment and offset can be entered in decimal or hex form; they're treated as unsigned values.

### See also

MEMPEEK and MEMWRITE.

## MEMREAD

---

Returns the values beginning at the specified memory address into a string variable.

**MEMREAD** *segment offset strovar length*

### Example

**memread 0xF000 0xFFFF5 adate 8**

Returns the value of the first 8 bytes beginning at segment 0xF000, offset 0xFFFF5 into the string variable ADATE.

### Comments

Both segment and offset can be entered in decimal or hex form; they're treated as unsigned values.

The contents of the string can be examined with the STRPEEK command.

### See also

MEMPEEK, MEMWRITE and STRPEEK.

## MEMWRITE

---

Sets the values beginning at the specified memory address from the contents of a string.

**MEMWRITE** *segment offset string length*

### Example

**memwrite 0x40 0x1E outbytes 16** Sets the value of the first 16 bytes beginning at segment 0x40, offset 0x1E from the string OUTBYTES.

### Comments

Both segment and offset can be entered in decimal or hex form; they're treated as unsigned values.

The contents of a string variable can be set using **STRSET** and **STRPOKE**.

### See also

MEMREAD.

## MESSAGE

---

Displays text on the local screen, **without** sending it to the remote. The message is displayed at the current cursor position in the current colors. **MESSAGE** appends a CR/LF to each text string (unless you **SET MSG\_CRLF OFF**).

**MESSAGE** *string*

### *string*

A series of characters to display. The string may contain control characters (such as CR and LF) by using the translation conventions described under "Translating Control Codes" in your **USER MANUAL**.

## Examples

```
message "+-----+"
message "| Enter your choice: |"
MESSAGE "+-----+"
locate 2 20
get S0 1
assign S9 "This is line one^M^JThis is the second"
message S9
```

## Comments

^M sends a carriage return, while ^J is a line feed.

Use the MESSAGE command for prompts, informational messages and building menus.

## See also

SET MSG\_CRLF, ATSAY, FATSAY and LOCATE.

# METAKY

---

Executes the specified Meta key.

**METAKY** *integer*

*integer*

Any integer value from 0 to 9.

## Examples

<b>metakey</b> 5	Sends Meta key assigned to Alt-5.
<b>init</b> n8 2	Stores a Meta key number in N8 and
<b>metakey</b> n8	then sends the Meta key sequence assigned to Alt-2.

## Comments

Use the MLOAD command to load individual keyboard Meta key files.

METAKY can only be used with Meta key entries that don't execute other scripts.

## See also

MLOAD.

## MGET

---

Receives a text string or number entered by the user at the keyboard and stores it in the specified variable. MGET prevents anyone from reading the entry on the screen by “masking” the entry with asterisks (\*).

**MGET** *strovar* | *numvar* [*length*]

***strovar* | *numvar***

The variable into which the string or number received from the user is placed.

***length***

A numeric value which determines the maximum number of characters that will be accepted. If this optional parameter is omitted, the default value of 80 characters is used. A beep will sound if the user attempts to enter more than the specified number of characters.

### Example

```
message "Enter the password"
mget S9 8
find S9 "secret"
IF NOT FOUND
    message "You're not an authorized user!"
    quit
endif
```

### Comments

MGET is useful for security-related information; for example, user passwords.

The cursor position will remain at the location where the user pressed **[Enter]** or **[Esc]**.

MGET can be exited with the **[Esc]** key (the statement **IF FAILURE** returns “TRUE”).

### See also

ATGET, GET, KEYGET, and MATGET.

## MKDIR

---

Creates a new directory using a path and/or directory name you provide.

**MKDIR** *filespec*

### Example

**mkdir** "temp"

Creates the directory TEMP (within the current working directory).

### Comments

If a path is not provided, PROCOMM PLUS creates the directory within the current working directory.

The result of a MKDIR command can be tested with the **IF SUCCESS** and **IF FAILURE** statements.

### See also

RMDIR, CHDIR and GETDIR.

## MLOAD

---

Loads the specified keyboard Meta key file.

**MLOAD** *filespec*

*filespec*

Any valid DOS filename.

### Example

**mload** "SYSTEM1.KEY"

Loads a new Meta key file.

### Comments

If the file doesn't exist, it will be created. The .KEY extension is not required.

This command can be tested with the **IF SUCCESS** statement, returning "FALSE" if the specified Meta key file can't be read (or created) in either the current directory or in the directory specified with the "SET PCPLUS=" command in the AUTOEXEC.BAT file.



## MOD

---

Returns the remainder after division (called the “modulus”) into a numeric variable.

**MOD** *number number numvar*

### Example

**integer leftover**  
**mod 10 7 leftover**

Divides 10 by 7 and places the remainder in the numeric variable **LEFTOVER**. The operator form would be **LEFTOVER=10%7**.

### Comments

For floats, integers and longs, the remainder has the same sign as the number being divided (the dividend); its absolute value is always less than the absolute value of the divisor.

### See also

**DIV**, **CEIL** and **FLOOR**.

## MSPAUSE

---

Pauses script execution for the specified number of milliseconds.

**MSPAUSE** *integer*

### Example

**mspause 100**

Pauses the execution of the script for 100 milliseconds.

### Comments

Unlike the **PAUSE** command, **MSPAUSE** can't be aborted with the **Esc** key.

### See also

**PAUSE**.

## MUL

---

Multiplies the first two numbers and stores the result in the last numeric variable.

**MUL** *number number numvar*

### Comments

It is possible to multiply two numbers and have the result outside the range of the specified numeric variable; PROCOMM PLUS does no error checking on this value.

The statement "MUL N0 N1 N2" has the equivalent operator form "N2=N0\*N1".

### See also

DIV.

## NEG

---

Negates the value of the specified number and places the result in a numeric variable.

**NEG** *number numvar*

### Comments

The *command* form "NEG N0 N1" is equivalent to the *operator* form "N1=-N0".

### See also

SUB and COMP.

## NEQ

---

Tests two numeric values for non-equality.

**NEQ** *number number intvar*

### Example

**integer first, second**  
**neq first second n1**

Tests the values **FIRST** and **SECOND**, placing the result in the predefined numeric variable **N1**.

### Comments

The integer variable will be initialized to 0 for "FALSE" and any non-zero value for "TRUE".

The conditional form of this command is "IF/ELSEIF/WHILE NEQ NUMBER NUMBER". The statement "NEQ N0 N1 N2" has the equivalent operator form "N2=N0!=N1".

### See also

**EQ**.

## NORMON

---

Turns on the normal attribute for Terminal mode display.

**NORMON**

### See also

**REVON**, **ULINEON**, **DIMON** and **BLANKON**.

## NOT

---

Performs a logical NOT operation on a number. The numeric variable is assigned 1 if the number is 0, and 0 if the number is non-zero.

**NOT** *number intvar*

### Comments

**NOT** and **ZERO** function identically.

The *command* form "NOT N0 N2" is equivalent to the *operator* form "N2=!N0".

### See also

ZERO.

## NULL

---

Tests a string variable for the null condition (no contents).

**NULL** *string intvar*

### Example

**null s1 result**

Tests the contents of the predefined string variable S1 for null. The result is placed in the integer variable RESULT.

```
while null s1
  atget 10 20 15 10 s1
endwhile
```

Forces a response to the ATGET statement.

### Comments

The integer variable will be initialized to 0 (meaning "FALSE") or 1 (meaning "TRUE", or no contents) after the test.

The conditional form of this command is "IF NULL STRVAR".

## OR

---

This command performs a bitwise comparison of two numbers and places the result in the specified numeric variable. For each two bits compared, the resulting variable is assigned the value 1 or 0 in the same corresponding bit position. A 1 is assigned if either or both bits are 1, while a 0 is assigned if both of the bits are 0.

**OR** *number number numvar*

### Comments

OR cannot be used with floating point numbers.

The *command* form "OR N0 N1 N2" is equivalent to the *operator* form "N2=N0|N1".

**See also**

XOR and AND.

**ORL**

---

Performs a logical OR operation on two numbers and places the result in the specified numeric variable. The result is 1 if either or both numbers are non-zero, while the result is 0 if both of the numbers are zero.

**ORL** *number number intvar*

**Comments**

ORL cannot be used with floating point numbers.

The *command* form "ORL N0 N1 N2" is equivalent to the *operator* form "N2=N0 | N1".

**See also**

ANDL.

**OUTPORT**

---

Writes data to the specified I/O port.

**OUTPORT** *port character*

**Examples**

integer char=65  
outport 0x3f8 char

Writes a byte to the port with address 0x3F8 from the integer variable CHAR.

**Comments**

*Port* identifies the port address (in decimal or hex format); the value is treated as unsigned.

**IMPORTANT: OUTPORT SHOULD ONLY BE USED IF YOU'RE EXPERIENCED WITH MANIPULATING THE HARDWARE SIGNALS AND PORTS ON YOUR SYSTEM. IMPROPER USE OF THE OUTPORT COMMAND COULD DAMAGE YOUR HARDWARE!**

**See also**

INPORT.

## ***PARMREST***

---

Restores the PROCOMM PLUS settings found in PCPLUS.PRM.

**PARMREST**

**See also**

PARMSAVE, SET and FETCH.

## ***PARMSAVE***

---

Saves the current PROCOMM PLUS settings to PCPLUS.PRM.

**PARMSAVE**

**See also**

PARMREST, SET and FETCH.

## ***PAUSE***

---

Halts script-file execution for the specified number of seconds. Characters received during a pause are not displayed until after the pause has completed.

**PAUSE** *integer*

*integer*

A positive integer value indicating the number of seconds to pause execution.

**Examples**

```
transmit "Kermit send file.ext"  
pause 3  
kermit receive
```

Begins a transfer and provides a pause to allow the remote system to start.

## Comments

Unlike the MSPAUSE command, PAUSE can be aborted with the **[Esc]** key.

This command can be tested with the IF SUCCESS and IF FAILURE statements; FAILURE is set if PAUSE was terminated by the user pressing the **[Esc]** key.

## See also

SUSPEND UNTIL and MSPAUSE.

# PRINTER

---

Controls print logging. PROCOMM PLUS writes the log to the DOS print device specified in Setup General Options.

## PRINTER ON|OFF

**ON**

Begins logging the session to the printer.

**OFF**

Ends logging the session to the printer.

## Example

**printer on  
clear**

Begins printing, executes other commands and then ends printing.

.  
. .  
.

**printer off**

## Comments

You can use the DOS MODE command to redirect printer output; alternately, change the name of your print device in Setup (or with the SET PRTNAME statement).

Instead of using this command, note that you can save time by using the LOG command and printing the data later.

## See also

LOG and SET PRTNAME.

## PROC

---

Marks the beginning of a procedure block.

**PROC** *name*

*name*

A unique name or "MAIN" (every ASPECT program begins execution at a procedure called "MAIN").

### Example

**proc main**

**clear**

**mdial "345-6789" "WEEKLY"**

.

.

.

**endproc**

Declares the procedure MAIN, manually dials a number, executes other commands and closes the procedure.

### Comments

Each procedure **must** be given a unique name, and every ASPECT script **must** have a procedure called "MAIN" (which indicates the starting point of script execution).

Most ASPECT commands occur within the body of a procedure—exceptions include **DEFINE**, **UNDEF**, **INCLUDE**, **INTEGER**, **LONG**, **FLOAT**, and **STRING**.

Any procedure except MAIN may declare a parameter list; the parameters are variables of any type, and are local to the procedure. The parameters are initialized with values passed via the **CALL** which invoked the procedure.

### See also

**CALL**, **INTPARM**, **STRPARM**, **LONGPARM**, **RETURN**, **SETJMP**, **LONGJMP**, **FLOATPARM** and **ENDPROC**.



## **PUSHBACK**

---

Moves the last character read from the receive data buffer back to the beginning of the buffer; in other words, the last character read from the buffer becomes the next character read from the buffer.

### **PUSHBACK**

#### **Comments**

PUSHBACK can be called multiple times to push back any number of characters previously read from the buffer.

#### **See also**

COMGETC, COMGETCD, COMPUTC and SET RXDATA.

## **PUTENV**

---

Adds or changes an environment variable definition.

### **PUTENV** *string*

#### **Example**

```
putenv "pcplus=d:\pc"
```

Sets the PCPLUS environment variable to the \PC directory on drive D.

#### **Comments**

Only 1 variable can be added or changed at a time.

The variable is active until the command is called again (at which time the previous variable definition is purged). Any addition or change will be lost after you exit PROCOMM PLUS.

The word SET is not required in the string, and the environment variable is forced uppercase (even if supplied in lowercase).

This command can be tested with the IF SUCCESS and IF FAILURE statements to determine if the environment modification was successful.

#### **See also**

GETENV.

## PUTVATTR

---

Updates the local screen with a display attribute at the specified row and column.

**PUTVATTR** *row column attribute*

### Example

**putvattr 4 20 7**

Sets the attribute at row 4, column 20 to 7.

### See also

GETVATTR and PUTVCHAR.

## PUTVCHAR

---

Updates the local screen with a character at the specified row and column.

**PUTVCHAR** *row column character*

### Example

**putvchar row1 col1 205**

Displays the character (decimal 205) at the location specified by the integer variables ROW1 and COL1.

### See also

GETVCHAR and PUTVATTR.

## QUIT

---

Terminates the executing script file, disconnects, and then exits PROCOMM PLUS.

### QUIT

### Example

**transmit "disconnecting"**  
**quit**

Quits PROCOMM PLUS after sending a message and disconnecting.

## Comments

Use QUIT only when you wish to terminate both the script and PROCOMM PLUS. To exit without disconnecting, use the BYE command.

## See also

BYE, CONNECT, EXIT and TERMINAL.

# RCA

---

Interprets the next two received characters as a specific row and column where the cursor should be moved.

## RCA

## Comments

The row and column values are based from the value 32; for example, the values 35 and 40 refer to row 3, column 8 (subtract 32 from the values received).

## See also

CURDN, CURLF, CURRT and HOME.

# RDWRITE

---

Empties the Terminal mode Redisplay buffer into the specified file.

**RDWRITE** *filespec*

## Comments

Data is appended to the end of a file if it already exists.

This command can be tested with the IF SUCCESS statement, returning "TRUE" if the data was written to the file.

## See also

RDFLUSH and SET REDISPLAY.

## REDIAL

---

Redials numbers in the dialing queue.

**REDIAL** [*strvar*]

*strvar*

A variable in which PROCOMM PLUS returns the number of the dialing directory entry with which a connection has been made.

### Comments

If you use REDIAL with a queue, it will attempt to redial beginning with the first number in the queue.

### See also

MDIAL and DIAL.

## RENAME

---

Renames an existing file.

**RENAME** *filespec filespec*

### Example

**rename** "PC.LOG" "bak.log"

Renames PC.LOG to BAK.LOG in the current directory.

**rename** "C:\tmp" "C:\hw\old"

Renames the file TMP in the root directory of drive C to OLD in the HW directory (effectively moving it).

### Comments

If no path is supplied, RENAME searches the current directory for the source file.

Files can be renamed to a different directory on the same drive—a functional equivalent to moving them from one directory to another.

The result of a RENAME command can be tested with the IF SUCCESS or IF FAILURE statements.

### See also

DELETE.

## **RETURN**

---

Exits the current procedure and resumes processing at the statement following a CALL command.

### **RETURN**

#### **Comments**

A RETURN statement placed in the "MAIN" procedure terminates the script.

The ENDPROC command includes an implied RETURN.

Any SETJMP commands invoked in the current procedure will no longer be active upon a RETURN from that procedure.

#### **See also**

PROC, ENDPROC, SETJMP, LONGJMP and CALL.

## **REVN**

---

Turns on the reverse attribute for Terminal mode display.

### **REVN**

#### **See also**

BLINKON, BOLDON, ULINEON and NORMON.

## **REWIND**

---

Repositions the file pointer corresponding to the specified index back to the beginning of the file.

### **REWIND** *index*

#### **Example**

**rewind 0**

Rewinds the pointer for the file indexed as 0. All end-of-file and error flags are cleared.

#### **See also**

FSEEK, FOPEN and FCLEAR.

## RFLUSH

---

Clears the receive data buffer.

**RFLUSH**

### Comments

Any characters that have been received but not processed or displayed will be lost when this command is issued. It's generally used to clear the receive data buffer in preparation for some task.

### See also

KFLUSH and RDFLUSH.

## RGET

---

Receives and stores text strings sent by a remote system.

**RGET** *strvar* [*length* [*integer*]]

*strvar*

The variable where the string is stored. The carriage return is not stored as a part of the user's input.

*length*

An integer value ranging from 0 to 80, specifies the maximum number of characters to receive before continuing processing. If this parameter is not included, the maximum of 80 characters is used.

*integer*

This integer determines the maximum number of seconds to wait for the string to be received from the remote system before timing out. If this parameter is not included, the default of 30 seconds is used.

**Example**

```

transmit "ATSO=1^M"
while not connected
endwhile
transmit "ENTER PASSWORD:"
rget S9 8 45
if not success
    transmit "Goodbye!"
    hangup
endif

```

Waits a maximum of 45 seconds to receive a text string of 8 characters and then tests the outcome.

Disconnects if the characters are not received.

**Comments**

The RGET command completes when a carriage return is received, when the specified number of characters are received or when the specified/default time expires. Execution continues with the next statement in the script.

This command can be tested with the IF FAILURE command, which returns "TRUE" when RGET times out.

RGET can be exited with the **[Esc]** key (the statement IF FAILURE is returns "TRUE").

To RGET a result message from a modem, you need to do two RGETS: one to strip the carriage return sent by the modem before its message, and one to capture the modem message itself (since RGET ends as soon as it encounters a carriage return).

**See also**

GET, COMGETC and COMGETCD.

**RMDIR**

---

Removes an existing directory using a specified path.

**RMDIR** *filespec*

**Comments**

If no path is supplied, RMDIR removes a subdirectory in the current working directory.

The result of a RMDIR command can be tested with the IF SUCCESS or IF FAILURE statements.

Only empty directories can be removed.

### See also

CHDIR, MKDIR and GETDIR.

## RSTRCMP

---

Compares the contents of two strings up to the specified length.

**RSTRCMP** *string string* [*length*]

### Example

**rstrcmp** pass input 30

Compares the first 30 characters of the two strings PASS and INPUT.

### Comments

The strings can contain *raw* data, displayable or not.

The result of this command can be tested with the IF SUCCESS or IF FAILURE statements.

### See also

STRCMP.

## RUN

---

Executes any external program from within a PROCOMM PLUS script file, except for DOS internal commands and batch files.

**RUN** *string* [WAIT|NOCLEAR]

*string*

Any executable program or command, (except an internal DOS command or a batch file) as it would appear on the DOS command line (optionally including a DOS path).

**WAIT**

After the program is completed, PROCOMM PLUS waits for a key press before returning to the script file.



**NOCLEAR**

Prevents PROCOMM PLUS from saving and clearing the screen before executing the command (and restoring it after execution is complete).

**Examples**

**run "filesort"**

Executes a program with the start-up command FILESORT.

**string prg**

**assign prg "filesort"**

**run prg**

**if failure**

**message "filesort returned error"**

**else**

**message "filesort executed successfully"**

**endif**

Executes the program and then tests for a successful completion.

**Comments**

If the path to the executable command is not specified with it, the program or the DOS command must be either in the current directory or in the directory specified in your DOS path.

Arguments can be passed to the external program by separating the program name and the arguments from each other with spaces.

This command can be tested with the IF SUCCESS statement, returning "FALSE" if the program could not be executed or exited with any return code other than 0.

Be sure that you have enough memory to execute the specified command or program and PROCOMM PLUS at the same time. If you use the RUN command to execute a program or command that requires user input, make sure that the user running the script file is aware of this, since processing will halt until the required input is provided.

For more information, see "Problems When Running an External Program" in your USER MANUAL and Chapter 4 of this manual.

**See also**

METAKEY, DOS and SHELL.

## SCROLL

---

Scrolls an area of the screen up by the specified number of lines. This is similar to the BIOS scroll function.

**SCROLL** *integer row column row column attribute*

*integer*

An integer value ranging from 0 to the number of screen rows which determines the number of lines to scroll up within the defined area. If the value is 0, then the entire scroll area is blanked.

*row column*  
*row column*

Defines the scroll area. Since no error checking is performed, make sure that the first row and column pair are less than or equal to the second pair.

### Examples

**scroll 10 0 0 24 10 79**

Scrolls the area from row 0 column 0 (upper-left corner) to row 24 column 10 (lower-right corner) up 10 lines and clears the area to a red background with a white foreground.

**scroll 24 0 0 23 79 7**

Clears the screen above the Status line to black on a white background.

### See also

BOX and DSCROLL.

# SENDFILE

---

Sends (or “uploads”) a file to a remote computer using the indicated transfer protocol.

**SENDFILE** *protocol filespec*

*protocol*

The following protocols do **not** require a *filespec*:

EXTPROTO1  
EXTPROTO2  
EXTPROTO3  
CISB

The following protocols require a *filespec*:

KERMIT *filespec*  
XMODEM *filespec*  
ZMODEM *filespec*  
WXMODEM *filespec*  
1KXMODEM *filespec*  
1KXMODEMG *filespec*  
IMODEM *filespec*  
TELINK *filespec*  
MODEM7 *filespec*  
ASCII *filespec*  
RASCII *filespec*  
YMODEM *filespec*  
YMODEMG *filespec*  
SEALINK *filespec*

*filespec*

A valid DOS filename or a variable containing a valid DOS filename.

## Examples

**waitfor "Begin your transfer"**  
**sendfile zmodem "FILE.EXT"**

Sends a file with ZMODEM.

**string ufile**  
**message "Enter filename:"**

Prompts user for filename.

**get ufile**  
**transmit "RECEIVE"**  
**transmit ufile**  
**transmit "^M"**  
**sendfile kermit ufile**

Sends the filename and then sends the file to a Kermit server.

## Comments

To perform an upload, you must first initiate the receive on the remote; begin your transfer only after the remote indicates that it is ready. All transfers may be tested for successful completion with the commands **IF SUCCESS** or **IF FAILURE**.

Pre-existing files can pose a problem if you're using the ZMODEM transfer protocol. If a file you're sending already exists and *crash recovery* is not enabled, the file will be skipped—however, the **IF SUCCESS** statement will still return a value of "TRUE". To avoid this, enable crash recovery or delete the file on the remote system before using **SENDFILE**.

For more information on protocols, see the appendix entitled "File-Transfer Protocols" in your **USER MANUAL**.

## See also

**GETFILE**.

# SET

---

Changes system parameters which control various PROCOMM PLUS and ASPECT operations. **SET** commands can customize the settings in the Setup facility and the Line Settings screen for your applications.

**SET** *parameter value*

*parameter*

One or two keywords identifying the parameter to be changed.

*value*

The new setting for this parameter. Value can be a keyword, integer, long or string (depending on the parameter requirements).

For details about the following parameters, please refer to Chapter 8 of your **USER MANUAL**.

## **ABORTDL KEEP|DELETE**

Determines whether PROCOMM PLUS will **KEEP** or **DELETE** incomplete and aborted downloads. The default is **KEEP**, and **FETCH** returns a 0 for **KEEP** and a 1 for **DELETE**.

## **ALARM OFF|ON**

Sets the alarm sound **OFF** or **ON**.

***ANSI8BIT OFF|ON***

Sets 8-bit ANSI Escape sequences OFF or ON. The default is OFF (7-bit sequences).

***ASCII 8STRIP OFF|ON***

Strips the 8th bit from each character sent or received during an ASCII file transfer.

***ASCII BLANKEX OFF|ON***

Controls expansion of blank lines during ASCII uploads.

***ASCII CHARPACE integer***

Sets the character pacing in milliseconds (valid values range from 0 to 999).

***ASCII DN\_CR CR|STRIP|CR\_LF***

Controls translation of incoming carriage returns during ASCII downloads. FETCH returns a 0 for CR, a 1 for STRIP and a 2 for CR\_LF.

***ASCII DN\_LF LF|STRIP|CR\_LF***

Controls translation of incoming line-feeds during ASCII downloads. FETCH returns a 0 for LF, a 1 for STRIP and a 2 for CR\_LF.

***ASCII DN\_TO integer***

Sets the timeout delay for ASCII downloads; the value can range from 0 to 30000 seconds between received characters.

***ASCII ECHO OFF|ON***

Controls local echo during ASCII uploads.

***ASCII LINEPACE integer***

Sets line pacing timing in 1/10 seconds (valid values range from 0 to 99).

***ASCII PACECHAR character***

Sets the pace character used. Specify this as an ASCII decimal value (valid values range from 0 to 255).

***ASCII TABEX OFF|ON***

Converts the TAB character to eight spaces during ASCII uploads.

***ASCII UP\_CR CR|STRIP|CR\_LF***

Controls translation of outgoing carriage-returns in ASCII uploads. FETCH returns a 0 for CR, a 1 for STRIP and a 2 for CR\_LF.

**ASCII UP\_LF LF|STRIP|CR\_LF**

Controls translation of outgoing line-feeds in ASCII uploads. **FETCH** returns a 0 for LF, a 1 for STRIP and a 2 for CR\_LF.

**ASPDEBUG OFF|ON**

Controls whether or not **ASPCOMP** will display an offset location as a part of run-time error messages. The default is OFF. When **ASPDEBUG** is set to ON, the message "ASPECT file aborted" is displayed when a script is aborted with the **[Esc]** key.

**ATIME integer**

Sets amount of time alarm sounds (valid values range from 0 to 9999).

**BACKSPACE NONDEST|DEST**

Controls destructive nature of received backspace characters. **FETCH** returns a 0 for NONDEST and a 1 for DEST.

**BAUD long**

Sets the baud rate. Possible values are 300, 1200, 2400, 4800, 9600, 19200, 38400, 57600 and 115200. The **SET BAUD** statement is a synonym for **SET BAUDRATE**.

**BAUDRATE long**

Sets the baud rate. Possible values are 300, 1200, 2400, 4800, 9600, 19200, 38400, 57600 and 115200. The **SET BAUDRATE** statement is a synonym for **SET BAUD**.

**BLOCKCUR OFF|ON**

Specifies a square block cursor or a line cursor.

**BREAK integer**

Sets the length (in milliseconds) of a break sent by the **BREAK** command (valid values range from 0 to 32767).

**CALLOG OFF|ON**

Determines whether **PROCOMM PLUS** will keep a log of all completed calls. This command must be set *before* a connection is made for the log to be updated correctly.

**CDINXFER NO|YES**

Determines whether or not carrier detect will be monitored during file transfer operations.

**CHATMODE CHARACTER|BLOCK**

Specifies **BLOCK** or **CHARACTER** transmission of data in Terminal mode Chat. **FETCH** returns a 0 for **CHARACTER** and a 1 for **BLOCK**.

**CLIPCHAR** *character*

Specifies the Clipboard filename separator character.

**CR** **CR|CR\_LF**

Controls incoming CR translation. **FETCH** returns a 0 for CR and a 1 for CR\_LF.

**DATABITS** *integer*

Sets the data bits used; possible values are 7 or 8.

**DECIMAL** *length*

Sets the number of digits to the right of the decimal point to print for floating point numbers. This command affects the floating point precision used in **ATGET**, **ATSAY**, **FTOA** and all commands that use a format string (**FATSAY**, **FSTREMT** and **STREMT**). Valid values range from 0 to 80, and the default is 2. The value doesn't change if you chain to another script; however, any precision occurring in a format string overrides the default precision, and the **ATGET** command only uses the default precision when displaying a default floating point value. The last digit in the displayed value is rounded (for example, if the default precision is 2, a value of 123.456789 would become 123.46). For more information, see the descriptions for each of the above commands in this manual.

**DIALENTRY** *integer*

Loads the information from the specified Dialing Directory entry into the "\$D\_" family of system variables; possible values range from 1 to 200.

**DISPLAY OFF|ON**

Controls whether characters received from the remote system are displayed. Use **DISPLAY OFF**, for example, if you don't want to see characters displayed in menu-driven script files. Note that no characters will be written to an open logfile if **DISPLAY** is **OFF**.

**DLDIR** *string*

Sets the default download drive and directory; maximum length for **DLDIR** is 64 characters.

**DLXPROTO1** *string*

Specifies the program to use as External Download Protocol 1; maximum length is 15 characters.

**DLXPROTO2** *string*

Specifies the program to use as External Download Protocol 2; maximum length is 15 characters.

***DLXPROTO3 string***

Specifies the program to use as External Download Protocol 3; maximum length is 15 characters.

***DROPDTR NO|YES***

Specifies whether PROCOMM PLUS will drop DTR when you press the **[Alt]-[H]** terminal sequence. This doesn't affect the **SET MODEM DROPDTR** command, which controls how PROCOMM PLUS hangs up from the Dialing Directory.

***DUPLEX FULL|HALF***

Sets the duplex mode. **FETCH** returns a 0 for FULL and a 1 for HALF.

***EDITOR string***

Defines a program name to invoke with the **[Alt]-[A]** terminal sequence; maximum length for the editor string is 64 characters.

***EMULATION terminal***

Defines the active terminal type, clears the screen and updates the status line. The **FETCH** form of this **SET** command returns a numeric variable value corresponding to the terminal type. **SET EMULATION** is functionally equivalent to the **EMULATE** command. For the complete list of terminal values, please refer to the definition for the **FETCH** command.

***ENQ OFF|ON|CISB***

Controls response to ENQ (ASCII 5). **FETCH** returns a 0 for OFF, a 1 for ON and a 2 for CISB.

***EXITCDHIGH IGNORE|HANGUP|ASK***

Determines the action PROCOMM PLUS takes if Carrier Detect is high when you exit the program. **ASK** displays a prompt asking whether or not to hang up, **IGNORE** continues without prompting and **HANGUP** automatically disconnects without prompting. **FETCH** returns a 0 for IGNORE, a 1 for HANGUP and a 2 for ASK.

***EXPLODE OFF|ON***

Enables and disables exploding windows.

***EXTPROTO1 string ASPECT|PROGRAM|HOOK***

Specifies the name and type for External Download Protocol 1; maximum length for the name is 8 characters. **FETCH** returns a 0 for ASPECT, a 1 for PROGRAM and a 2 for HOOK.



**EXTPROTO2** *string ASPECT|PROGRAM|HOOK*

Specifies the name and type for External Download Protocol 2; maximum length for the name is 8 characters. **FETCH** returns a 0 for **ASPECT**, a 1 for **PROGRAM** and a 2 for **HOOK**.

**EXTPROTO3** *string ASPECT|PROGRAM|HOOK*

Specifies the name and type for External Download Protocol 3; maximum length for the name is 8 characters. **FETCH** returns a 0 for **ASPECT**, a 1 for **PROGRAM** and a 2 for **HOOK**.

**FASTKBD** *OFF|ON*

Sets the keyboard typomatic and repeat rates on enhanced keyboards between normal and fast mode.

**FGETS\_CRLF** *OFF|ON*

Controls the function of the **FGETS** command. When set **OFF**, this command discards the line feed character at the end of a string retrieved with **FGETS**. For files opened in binary mode, it also discards the carriage return before the line feed (and the end-of-file character if it's the last string read from the file). The default is **ON**.

**FINDCASE** *OFF|ON*

Sets case-sensitivity **OFF** or **ON** for the **FIND** command. The default is **OFF**, and the value doesn't change if you chain to another script. For more information, see the **FIND** command description in this chapter.

**FNLOOKUP** *OFF|ON*

Determines whether **PROCOMM PLUS** will "search" the current screen for a valid filename when downloading with certain protocols (such as **XMODEM**).

**HARDFLOW** *OFF|ON*

Enables and disables **RTS/CTS** hardware flow control.

**HOST AUTOBAUD** *OFF|ON*

Sets Host mode Auto baud detect **ON** or **OFF**.

**HOST CONNECTION** *MODEM|DIRECT*

Selects either the **MODEM** or **DIRECT** (wired) connection mode for Host operations. **FETCH** returns a 0 for **MODEM** and a 1 for **DIRECT**.

**HOST DLDIR** *string*

Specifies the download directory for Host mode operations; maximum length for the download path is 64 characters.

**HOST GOODBYE RECYCLE|HANGUP|EXIT**

Determines the GOODBYE action taken when exiting Host mode. **FETCH** returns a 0 for RECYCLE, a 1 for HANGUP and a 2 for EXIT.

**HOST MESSAGE *string***

Contains the Host Welcome Message (maximum length is 50 characters).

**HOST NEWUSERLVL 0|1**

Determines whether new users will be assigned a "0" (limited privilege level, no file transfer capability) or "1" (normal access) at logon.

**HOST SHELLBOOT OFF|ON**

Determines whether a loss of carrier will reboot Host when the remote user has shelled to DOS.

**HOST SYSTYPE CLOSED|OPEN**

Sets the Host system between OPEN (allow new users) and CLOSED (don't allow new users). **FETCH** returns a 0 for CLOSED and a 1 for OPEN.

**HOST TIMEOUT *integer***

Determines the Host Inactivity Timeout value; possible values range from 0 to 999 minutes.

**HOST ULDIR *string***

Specifies the upload directory for Host mode operations; maximum length for the upload path is 50 characters.

**INSMODE OFF|ON**

Sets insert mode OFF or ON for user-defined terminal emulation.

**KERMIT 8QUOTE *character***

Selects the 8th bit quote character; valid values range from 33 to 126.

**KERMIT BLOCKCHECK 1|2|3**

Selects the block check type, where 1 is a 1 byte checksum, 2 is a 2 byte checksum and 3 is a 3 byte CRC.

**KERMIT CQUOTE *character***

Sets the Kermit control quote character; valid values range from 32 to 127.

**KERMIT EOLCHAR *character***

Selects the Kermit end-of-line character; valid values range from 0 to 127.

**KERMIT FILETYPE TEXT|BINARY**

Selects the Kermit transfer file type. **FETCH** returns a 0 for **TEXT** and a 1 for **BINARY**.

**KERMIT HANDSHAKE** *character*

Selects the Kermit handshake character; valid values range from zero to 31.

**KERMIT PACKSIZE** *integer*

Sets the Kermit maximum packet size; valid values range from 20 to 1024.

**KERMIT PADCHAR** *character*

Selects the pad character; valid values range from 0 to 127.

**KERMIT PADNUM** *integer*

Sets the number of pad characters; valid values range from 0 to 127.

**KERMIT STARTCHAR** *integer*

Specifies the Kermit block start character; valid values range from 0 to 127.

**KEYS OFF|ON**

Controls how keystrokes are processed when a script is executed. When **KEYS** are **OFF** (the default), **PROCOMM PLUS** will check for keystrokes before each command is executed. If the key is anything other than the **[Esc]** key, it will be processed normally (as a command or a character sent to the remote system). If the **[Esc]** key is pressed, the user is asked whether or not to terminate the script. If **KEYS** are **ON**, however, the script is expected to check for and process each keystroke (the **TERMKEY** command can be used to process the command or pass keystrokes to the remote system). For example, if you press **[PgDn]** while a script file is being executed and **KEYS** are **OFF**, the window displaying the file-transfer protocols appears, just as in Terminal mode. If **KEYS** are **ON**, however, the **[PgDn]** keystroke is held in the keyboard buffer until it's processed by a script command (such as **KEYGET**). The value of **KEYS** doesn't change if you chain to another script. The **SET KEYS** command replaces the **SET MENUMODE** command used in earlier versions of **PROCOMM PLUS**.

**LOGFILE** *string*

Specifies the default name for the Log file invoked with the **[Alt]-[F1]** terminal sequence; maximum length for the Log file is 64 characters.

**MODEM AUTOANSOFF** *string*

Contains the modem string to disable auto answer operation; maximum length for this field is 24 characters.

**MODEM AUTOANSON** *string*

Contains the modem string to enable auto answer operation; maximum length for this field is 24 characters.

**MODEM AUTOBAUD** **OFF|ON**

Sets auto baud detection ON or OFF.

**MODEM CALLPAUSE** *integer*

Sets the amount of seconds PROCOMM PLUS will pause between calls; valid values range from 0 to 999.

**MODEM CDHIGHINIT** **NO|YES**

Controls whether PROCOMM PLUS will send the modem initialization string if Carrier Detect is high when you start the program.

**MODEM CNCT300** *string*

Contains the message sent by the modem for a 300 baud connection; maximum length for this field is 15 characters.

**MODEM CNCT1200** *string*

Contains the message sent by the modem for a 1200 baud connection; maximum length for this field is 15 characters.

**MODEM CNCT2400** *string*

Contains the message sent by the modem for a 2400 baud connection; maximum length for this field is 15 characters.

**MODEM CNCT4800** *string*

Contains the message sent by the modem for a 4800 baud connection; maximum length for this field is 15 characters.

**MODEM CNCT9600** *string*

Contains the message sent by the modem for a 9600 baud connection; maximum length for this field is 15 characters.

**MODEM CNCT19200** *string*

Contains the message sent by the modem for a 19200 baud connection; maximum length for this field is 15 characters.

**MODEM CNCT38400** *string*

Contains the message sent by the modem for a 38400 baud connection; maximum length for this field is 15 characters.

**MODEM DIALCMND *string***

Contains the modem dialing command string; maximum length for this field is 24 characters.

**MODEM DIALSUFFIX *string***

Contains the modem dialing command suffix string; maximum length for this field is 24 characters.

**MODEM DROPDTR NO|YES**

Specifies whether PROCOMM PLUS will drop DTR to hang up.

**MODEM HANGUP *string***

Contains the hangup command string; maximum length for this field is 24 characters.

**MODEM INIT *string***

Contains the modem initialization string; maximum length for this field is 46 characters.

**MODEM MAXDIAL *integer***

Specifies the maximum number of redial attempts; valid values range from 0 to 999.

**MODEM NOCNCT1 *string***

Contains the first message sent by the modem for no connection connection; maximum length for this field is 15 characters.

**MODEM NOCNCT2 *string***

Contains the second message sent by the modem for no connection connection; maximum length for this field is 15 characters.

**MODEM NOCNCT3 *string***

Contains the third message sent by the modem for no connection connection; maximum length for this field is 15 characters.

**MODEM NOCNCT4 *string***

Contains the fourth message sent by the modem for no connection connection; maximum length for this field is 15 characters.

**MODEM SENDCR NO|YES**

Specifies whether PROCOMM PLUS will send a carriage return to the modem after hanging up.

**MODEM WAITCNCT *integer***

Determines the maximum amount of seconds PROCOMM PLUS will wait for a connection during a call; valid values range from 0 to 999.

***MOUSEX integer***

Sets the horizontal mouse sensitivity; sensitivity decreases as the value increases. Valid values range from 1 to 999.

***MOUSEY integer***

Sets the vertical mouse sensitivity; sensitivity decreases as the value increases. Valid values range from 1 to 999.

***MSG\_CRLF OFF|ON***

Controls the function of the MESSAGE command. When set OFF, automatic carriage returns and line feeds used in the MESSAGE command are suppressed. The default is ON.

***PARITY NONE|ODD|EVEN|MARK|SPACE***

Controls the parity setting for this session. FETCH returns a 0 for NONE, a 1 for ODD, a 2 for EVEN, a 3 for MARK and a 4 for SPACE.

***PAUSECHAR integer***

Identifies the character PROCOMM PLUS translates into a half-second pause within modem commands, strings sent with the TRANSMIT command or character strings (like the Host mode welcome message). The default character is a tilde (~), and valid values range from 32 to 126.

***PORT COM1|COM2|COM3|COM4|COM5|COM6|COM7|COM8 [base [IRQ]]***

Selects the serial port. Optional base and IRQ address parameters can be included; they're treated as unsigned values.

***PROTECT OFF|ON***

Sets a display field as protected or normal for user-defined emulations.

***PROTOCOL protocol***

Selects a default protocol for uploading and downloading; the value must be a valid protocol name.

***PRTNAME string***

Defines the device to be used for print operations. A maximum of 4 characters is allowed in the device name.

***PULLDNKEY integer***

Selects the key to invoke the pull-down menu system; valid values range from ASCII 32 to 126.

***PULLDNMENU OFF|ON***

Sets the pull-down menu system OFF or ON.

**RANGECHK OFF|ON**

Sets script *value range checking* OFF or ON. If ON, an out-of-range value will issue an error message during execution, allowing the user to end the script (if the script is not aborted, the value may cause unpredictable results). A setting of OFF forces PROCOMM PLUS to ignore the out-of-range value and continue. The default is ON, and the value doesn't change if you chain to another script.

**REDISPLAY integer**

Controls the size of the Terminal mode Redisplay buffer (in kilobytes). Legal values range from 1 to 63.

**RELAXED OFF|ON**

When set to ON, this parameter increases the amount of time PROCOMM PLUS will wait for a block before timing out during a file transfer.

**REMOTECMD OFF|ON**

Determines whether PROCOMM PLUS will accept script commands sent by a remote PC.

**RXDATA OFF|ON**

Specifies whether PROCOMM PLUS or a script will process characters received at the active com port. The default, OFF, indicates that PROCOMM PLUS will process received characters; if RXDATA is ON, your script must handle incoming data (with commands like COMGETC and TERMWRT). If RXDATA is set ON, any active WHEN statements will only be checked when COMGETC or COMGETCD are called.

**SCREEN 25X80|EXTRAX80|USERMODE|EXTRAXUSER**

Toggles the current video mode (unlike VIDSTART, which sets the startup mode); functionally, it's similar to the **Ctrl-G** Terminal mode sequence. FETCH returns a 1 for 25X80, a 2 for EXTRAX80, a 3 for USERMODE and a 4 for EXTRAXUSER.

**SCROLL OFF|ON**

Determines scroll setting. If ON, characters or messages on the last row and column of the screen will scroll; if OFF, this field forces PROCOMM PLUS to overwrite characters on the last row with new data.

**SNAPSHOT string**

Specifies the default filename for the Screen Snapshot (invoked with the **Alt-G** Terminal mode sequence); maximum length for this field is 64 characters.

**SNOW OFF|ON**

Removes interference (or “snow”) on older CGA monitors during direct screen write operations.

**SOFTFLOW OFF|ON**

Enables or disables XON/OFF (or “software”) flow control.

**SOUND OFF|ON**

Controls sound effects.

**STATLINE OFF|ON**

Turns the status line at the bottom of the Terminal mode screen ON or OFF. When STATLINE is OFF, PROCOMM PLUS can use the entire screen for terminal display.

**STOPBITS 1|2**

Sets the stop bits used for the current session.

**SWITCHCASE OFF|ON**

Sets case-sensitivity OFF or ON when the SWITCH command is using string values. The default is OFF, and the value doesn’t change if you chain to another script. For more information, see the SWITCH command description in this chapter.

**TERMBOLD** *attribute*

Selects the color used to display high-intensity characters in Terminal mode.

**TERMDIM** *integer*

Selects the color used to display low-intensity characters in Terminal mode.

**TERMNORM** *integer*

Selects the color used to display normal characters in Terminal mode.

**TERMREV** *integer*

Selects the color used to display reverse characters in Terminal mode.

**TERMULINE** *integer*

Selects the color used to display underlined characters in Terminal mode.

**TERMWIDTH 80|132**

Controls whether PROCOMM PLUS will use an 80-column screen or a 132-column screen (regardless of the actual columns your hardware



can display). For more information, see “Terminal Options” in Chapter 8 of your USER MANUAL.

**TRANSLATE OFF|ON|STRIP**

Controls the use of the translate table. The STRIP option allows the removal of the 8th bit from all incoming data. FETCH returns a 0 for OFF, a 1 for ON and a 2 for STRIP.

**TXPACE** *integer*

Determines character pacing in milliseconds for all outgoing character strings.

**ULINEFONT OFF|ON**

When set ON, this parameter enables “true” underlining for EGA/VGA color monitors.

**ULXPROTO1** *string*

Specifies the program to use as External Upload Protocol 1; maximum length for this field is 15 characters.

**ULXPROTO2** *string*

Specifies the program to use as External Upload Protocol 2; maximum length for this field is 15 characters.

**ULXPROTO3** *string*

Specifies the program to use as External Upload Protocol 3; maximum length for this field is 15 characters.

**USERVID** *integer*

Sets the value sent to your graphics adaptor to select the “USER MODE” video mode. Values range from 0 to 255. For more information on video modes, see “Display/Sound Options” in Chapter 8 of your USER MANUAL.

**VGALINES 28|43|50**

Specifies the number of extra lines PROCOMM PLUS will display on EGA and VGA monitors; note that EGA supports only 43 lines.

**VIDSTART** *DOSMODE|25X80|EXTRAX80|USERMODE|EXTRAXUSER*

Sets the video mode PROCOMM PLUS will use each time you start the program. FETCH returns a 0 for DOSMODE, a 1 for 25X80, a 2 for EXTRAX80, a 3 for USERMODE and a 4 for EXTRAXUSER. For more information, see “Display/Sound Options” in Chapter 8 of your USER MANUAL.

**VIEWUTIL** *string*

Defines a program name to invoke with the **[Alt]-[V]** Terminal mode sequence; maximum length for this field is 64 characters.

**WAITCASE OFF|ON**

Sets case-sensitivity OFF or ON for the WAITFOR command. The default is OFF, and the value doesn't change if you chain to another script. For more information, see the WAITFOR command description in this manual.

**WHENCASE OFF|ON**

Sets case-sensitivity OFF or ON for the WHEN command. The default is OFF, and the value doesn't change if you chain to another script. For more information, see the WHEN command description in this manual.

**WRAP OFF|ON**

Controls line wrap in Terminal mode.

**WRITEPROT OFF|ON**

Sets a display field as write-protected or normal for user-defined emulation.

**XFERKEY REG|CTRL**

Selects the keys to use to initiate a file transfer. REG uses the default keys **PgUp** and **PgDn**, while CTRL uses **Ctrl-PgUp** and **Ctrl-PgDn**.

**ZMODEM AUTODLOAD OFF|ON**

Enables and disables ZMODEM auto downloading.

**ZMODEM ERRDETECT CRC32|CRC16**

Selects ZMODEM 16-bit or 32-bit CRC error detection. FETCH returns a 0 for CRC32 and a 1 for CRC16.

**ZMODEM RECVCRASH PROTECT|NEGOTIATE|ON|OVERWRITE**

Determines ZMODEM crash recovery action for received files. FETCH returns a 0 for PROTECT, a 1 for NEGOTIATE, a 2 for ON and a 3 for OVERWRITE.

**ZMODEM SENDCRASH PROTECT|NEGOTIATE|ON|OVERWRITE**

Determines ZMODEM crash recovery action for files being sent. FETCH returns a 0 for PROTECT, a 1 for NEGOTIATE, a 2 for ON and a 3 for OVERWRITE.

**ZMODEM TIMESTAMP OFF|ON**

Sets ZMODEM time/date stamping ON or OFF.

**ZMODEM TXMETHOD STREAMING|2KWINDOW|4KWINDOW**

Selects ZMODEM window/streaming transmission method. FETCH returns a 0 for STREAMING, a 2 for 2KWINDOW and a 4 for 4KWINDOW.

## Comments

Values shown as “*character*” should use the ASCII decimal value of the desired character. For example, to use XON (ASCII 17) as the KERMIT handshake character, issue the command **SET KERMIT HANDSHAKE 17**.

## See also

FETCH.

# SETFATTR

---

Sets a file’s attributes.

**SETFATTR** *filespec string*

## Example

**setfattr "pass.dat" "hr"**

Sets the file PASS.DAT with the attributes Hidden and Read-Only.

## Comments

Attributes can include “R” (Read-Only), “H” (Hidden), “S” (System) and “A” (Archive).

This command can be tested with the **IF SUCCESS** and **IF FAILURE** statements.

## See also

GETFATTR.

# SETFDATE

---

Sets a file’s date stamp.

**SETFDATE** *filespec string*

## Example

**setfdate "A1.DAT" "01/01/91"**

Sets the date stamp for the file A1.DAT at 01/01/91.

## Comments

This command can be tested with the **IF SUCCESS** and **IF FAILURE** statements.

## See also

GETFDATE and SETFTIME.

## SETFTIME

---

Sets a file's time stamp.

**SETFTIME** *filespec string*

## Example

**setftime "DAN.TXT" "00:33"**      Sets the creation time for the file  
DAN.TXT at 00:33 (military time).

## Comments

SETFTIME only sets the hour and minute of a file's time stamp.

This command can be tested with the **IF SUCCESS** and **IF FAILURE** statements.

## See also

SETFDATE and GETFTIME.

## SETJMP

---

Marks a location within a script that you can immediately "jump" to with the **LONGJMP** command.

**SETJMP** *index intvar*

*index*

One of three integer index values (0,1 or 2); the value identifies the location to the **LONGJMP** command.

*intvar*

An integer variable initialized to 0 at execution. This variable will contain a new value when the **LONGJMP** is executed, allowing further processing (dependent on the script's execution at the point of the **SETJMP**).

## Example

```

setjmp 0 test
if test
  switch test
    case 1
      clear
    endcase
  default
    exit
  endcase
endswitch
endif

```

Creates a SETJMP location at the IF command. The location is referenced by the index number 0, and the integer variable TEST will receive the value passed by the corresponding LONGJMP command.

## Comments

The marked location is the command following the SETJMP. Up to three SETJMP locations can be active at once.

The marked location remains active until a RETURN from the function where it was set—or until another routine uses a SETJMP with the same index.

## See also

LONGJMP.

# SHELL

---

Suspends PROCOMM PLUS and drops to the DOS command prompt. You may run any program that can be normally run from DOS at this time. To return to PROCOMM PLUS, type *exit* at the DOS command line.

## SHELL

## Comments

**IMPORTANT:** Use caution while in SHELL mode! Programs using the COM port may be hazardous to the communications link.

Any program or DOS command you run from SHELL must be either in the current directory or in the directory specified in your DOS path. Also, if you're using a hard disk system, COMMAND.COM must be in the directory from which you started your computer (typically the root directory of drive C). If you're using a floppy-disk system, COMMAND.COM must be on the disk in drive A.

Be sure that you have enough memory to run any SHELL command or program and PROCOMM PLUS at the same time.

SHELL performs the same function as the DOS Gateway Terminal mode command.

### See also

METAKEY, DOS and RUN.

## SHL

---

This command performs a left shift operation on the bits of one number and places the result in the specified numeric variable. The number of shifts performed is designated by the second number. For each shift performed, each bit in the number is shifted one bit position to the left. The most significant bit is discarded, and a 0 is stored in the least significant bit position. The result of each individual shift operation is the same as multiplying the number by two.

**SHL** *number number numvar*

### Comments

This command cannot be used with floating point numbers. The *command* form "SHL N0 N1 N2" is equivalent to the *operator* form "N2=N0<<N1".

### See also

AND, XOR, COMP and SHR.

## SHR

---

This command performs a right shift operation on the bits of one number and places the result in the specified numeric variable. The number of shifts performed is designated by the second number. For each shift performed, each bit in the number is shifted one bit position to the right. The least significant bit is discarded, and a 0 is stored in the most significant bit position. The result of each individual shift operation is the same as dividing the number by two.

**SHR** *number number numvar*

### Comments

This command cannot be used with floating point numbers. The *command* form "SHR N0 N1 N2" is equivalent to the *operator* form "N2=N0>>N1".

### See also

AND, XOR, COMP and SHL.

## SNAPSHOT

---

Copies the contents of the current screen to the disk file PCPLUS.SCR (or the filename specified as the default for screen snapshot files; see "File/Path Options" in Chapter 8 of your USER MANUAL. If the file exists, it appends the new screen to the existing file. If the file does not exist, it opens the file and then writes the information.

### SNAPSHOT

#### Example

**snapshot**

Copies the screen contents to the PCPLUS.SCR file.

#### See also

LOG and PRINTER.

## SOUND

---

Produces a sound of the specified frequency and duration.

**SOUND** *integer integer*

*integer*

Frequency of the sound in Hertz. The frequency can range from 21 to 32767 Hz.

*integer*

Length of time for sound, in hundredths of a second. Duration can range from 0 to 32767.

### Example

**sound 440 500**

Sounds an "A" note for 5 seconds.

## STATMSG

---

Displays a message centered on the Status line.

**STATMSG** *string*

*string*

A string of up to 80 characters.

### Example

```
string umsg
statmsg "Enter password"
get umsg 8
statrest
```

Displays the message "Enter password" and restores the Status line.

### Comments

The message remains onscreen until another command clears or resets it. If the Status line is **SET ON**, any **PROCOMM PLUS** function key will also erase the message; if the Status line is **SET OFF**, the message will be erased only when it's overwritten by incoming data, scrolls off of the screen or is cleared with another command (like **CLEAR** or **ATSAY**).

### See also

**ERRORMSG** and **USERMSG**.



## STATREST

---

Updates and redisplay the Status line (if the Status line is currently SET ON). The command has no effect if the Status line is SET OFF.

### STATREST

#### See also

SET STATLINE and STATMSG.

## STRCAT

---

Concatenates one string variable or quoted string to another string variable.

### STRCAT *strvar* *string* [*length*]

#### *strvar*

The variable to which the second string is concatenated. The result string must be less than or equal 80 characters in length.

#### *string*

The variable concatenated to *strvar*.

#### *length*

An optional integer specifying the maximum length to be copied from the second string.

#### Example

```
string front="STR"
string back="CAT"
strcat front back
```

Adds the string variable BACK to the end of FRONT. The value of FRONT is now "STRCAT".

#### See also

STRUPTDT and STRFMT.

## STRCMP

---

Compares two strings and sets IF SUCCESS to "TRUE" if the strings are identical.

### STRCMP *string* *string* [*length*]

***length***

An optional integer specifying the maximum number of characters to be compared.

**Comments**

STRCMP is case-sensitive.

**See also**

FIND, RSTRCMP, STRUPR and STRLWR.

**STRCPY**

---

Assigns a string variable or quoted string to another string variable.

**STRCPY** *strvar string* [*length*]

***string***

The second string can be either a string variable or a quoted string and is the string to be copied.

***length***

An optional integer specifying the maximum number of characters to copy from the second string.

**Examples**

**strcpy lname "Henry M." 5**

Assigns the value HENRY to the variable LNAME.

**Comments**

The command word **ASSIGN** is a synonym for STRCPY.

Strings can also be assigned to each other with the assignment operator "=" (for example, S0=S3).

**See also**

STRFMT, SUBSTR, STRUPDT and ASSIGN.

## STRFMT

---

Creates a formatted string using a template and modifies it with string or numeric variables. This is similar to "sprintf" in the C programming language.

**STRFMT** *strovar formatstr [param]...[param]*

**strovar**

Variable where the formatted string is stored.

**formatstr**

For a complete description of the valid format specifiers, please refer to the definition for FATSAY in this chapter.

### Comments

Values are taken sequentially (left-to-right) from the first parameter listed to the last for format types found in the *formatstr*. The maximum number of parameters is 10.

### Example

```
init N1 29
sprintf S2 "I'm %d years old" N1
message S2
```

Prints "I'm 29 years old".

### See also

FATSAY and FSTRFMT.

## STRING

---

Defines a global or local string variable.

**STRING** *name[=string][, name[=string]]...*

**[=string]**

An initializer expression; it can be a quoted string or a previously-declared string variable.

### Examples

```
string name = "jody"
```

Defines the string variable NAME and initializes it to "jody".

## Comments

For more information on using *global* and *local* variables, please refer to the definition for **LOAT**.

## See also

STRPARM, LONG, FLOAT AND INTEGER.

## STRLEN

---

Returns the length of a string or string variable's contents into an integer variable.

**STRLEN** *string intvar*

### Example

**string bbs**  
**strlen bbs len**

Returns the length of the string variable **BBS** into the integer variable **LEN**.

## STRLWR

---

Converts the contents of a string variable to all lowercase characters.

**STRLWR** *strovar*

### Example

**string name**  
**strlwr name**

Converts the contents of the string variable **NAME** to all lowercase.

## See also

STRUPR.

## STRPARAM

---

Defines a string parameter variable.

**STRPARAM** *name*[, *name*]...[, *name*]

### Example

**strparm** bbsname

Defines the string parameter  
BBSNAME.

### Comments

Any procedure—except MAIN—can be defined with up to 10 *parameter variables*. Parameter variables are similar to local variables in that they may only be referenced within the procedure in which they're defined; unlike local variables, though, the value of parameters are automatically initialized when the procedure is called.

For more information on using parameter variables, please refer to the definition for FLOATPARAM.

### See also

STRING, INTPARM, FLOATPARAM and LONGPARAM.

## STRPEEK

---

Returns the ASCII value of a single character within a string.

**STRPEEK** *string strindex intvar*

### Example

**integer** char  
**string** origin  
**strpeek** origin 7 char

Returns the value of the byte at  
position 7 in the string variable  
ORIGIN into the integer variable  
CHAR.

### Comments

The character position is zero-based from the beginning of the string (the first position in the string variable is position 0).

### See also

SUBSTR and STRPOKE.

## STRPOKE

---

Sets the ASCII value of a single character within a string.

**STRPOKE** *strovar strindex character*

### Example

```
Integer newchar=65
string origin,text
strpoke text 7 newchar
```

Sets the value of the character at position 7 in the string variable **ORIGIN** with the value of the integer variable **NEWCHAR**.

### Comments

The character position is zero-based from the beginning of the string (the first position in the string variable is position 0).

### See also

**STRPEEK** and **STRUPDT**.

## STRSET

---

Initializes the contents of a string variable up to the designated length.

**STRSET** *strovar character length*

### Example

```
string name
strset name 32 40
```

Initializes the value of the string variable **NAME** with the value 32 for a length of 40 bytes.

## STRUPDT

---

Overwrites a string with another string beginning at a specified index.

**STRUPDT** *strovar string strindex length*

**Example**

string output, newdata  
 strupdt output ndata 3 10

Sets the values starting at position 3 in the string variable OUTPUT with the value of the string variable NDATA. A total of 10 characters will be overwritten.

**Comments**

This command is similar in function to STRPOKE (except that the characters replaced are taken from a string instead of an integer).

**See also**

STRPOKE and SUBSTR.

## STRUPR

---

Converts the contents of a string variable to all uppercase characters.

**STRUPR** *strvar*

**Example**

string name  
 strupr name

Converts the contents of the string variable NAME to all uppercase.

**See also**

STRLWR.

## SUB

---

Subtracts the second number from the first and then stores the result in the last numeric variable.

**SUB** *number number numvar*

**Comments**

It is possible to subtract one number from another number and have the result beyond the range of numeric variables; PROCOMM PLUS does no error checking on this value.

The *command* form "SUB N1 N2 N3" is equivalent to the *operator* form "N3=N1-N2".

## See also

DEC and DIV.

## SUBSTR

---

Copies the indicated number of characters from a string, beginning at a specified position.

**SUBSTR** *strvar string strindex length*

<i>strvar</i>	The resultant string.
<i>string</i>	The source for the substring extraction.
<i>strindex</i>	The character position in the source string that starts the resultant string. The position is counted from zero; for example, in the string "Tom" the character <i>T</i> is position 0 and the character <i>o</i> is position 1.
<i>length</i>	This is the number of characters in the source string that will be extracted. If the length is greater than the remaining length of the source string, SUBSTR will copy the remaining characters from the source string.

## Examples

```
string phone
string data
substr phone data 1 7
assign s1 "PROCOMM"
substr s2 s1 3 3
```

Takes a substring from DATA starting at position 1 for 7 characters in length, and stores it in PHONE.

Takes a substring from S1 starting at position 3 for 3 characters in length, and stores it in S2. Since we begin counting positions at 0, S2 would now be the string "COM".

## See also

STRPEEK, STRUPDT, STRCPY and FIND.



## SUSPEND UNTIL

---

Waits until the given time to continue execution.

**SUSPEND UNTIL** *integer integer*

*integer integer*

The first integer (the hour) is in 24 hour format, with a range of 0 to 23. The second integer (the minute) has a range of 0 to 59.

### Example

**SUSPEND UNTIL 13 30**

Waits until 1:30 PM to continue.

### Comments

SUSPEND UNTIL can be exited with the **[Esc]** key (IF FAILURE is set "TRUE"). All other keys are ignored.

### See also

WAITQUIET, PAUSE and WAITFOR.

## SWITCH

---

Provides multiple decision points by comparing a string or integer to one or more values. SWITCH requires the use of CASE, ENDCASE and ENDSWITCH commands; the use of the DEFAULT command is optional.

```

SWITCH string|integer
    CASE string|integer
        .
        .
        .
    ENDCASE
    [DEFAULT
        .
        .
        .
    ENDCASE]
ENDSWITCH

```

*string|integer*

The source item to be compared to the string or integer following each CASE statement.

**CASE** *string|integer*

Compares the variable following the SWITCH command to the "target" of the CASE command. If matched, processing continues with each command on subsequent lines until the ENDCASE command is encountered. If a match is not found, the processing of subsequent CASE or DEFAULT commands continues. Items in the CASE statement must match the data types used in the SWITCH statement (for example, you can't compare a string to an integer).

**ENDCASE**

Concludes processing of commands following CASE and DEFAULT commands and passes control to the command on the line following the ENDSWITCH command.

**DEFAULT**

An optional parameter, which handles cases where no match is found in any preceding CASE. This command causes unconditional processing of each command on the lines following until the ENDCASE command is encountered. Processing then passes to the command on the line following the ENDSWITCH command.

## Examples

```

get_choice:
message "Enter your choice"
get S5
switch S5
  case "A"
    gosub choicea
  endcase
  case "B"
    gosub choiceb
  endcase
  case $NULL
    gosub null_case
  endcase
  default
    message "Invalid selection"
    pause 3
    goto get_choice
  endcase
endswitch

```

Gets choice A, B or C.  
Branches to a subroutine based on the choice.

## Comments

When a match occurs between the source item and the value following a **CASE** command, command processing continues on the line following the **CASE** command until the **ENDCASE** command is encountered. Processing then continues with the command on the line after the **ENDSWITCH** command, which concludes the entire phrase.

**SWITCH** supports multiple **CASE** commands within a single **CASE-ENDCASE** command block; a single command block can be executed by matching the target item with any one of several **CASE** commands. Since the end of a block is always an **ENDCASE** command, at least one **ENDCASE** must occur whenever **CASE** or **DEFAULT** is used.

If a **CASE** command is matched, the statements following it are executed until an **ENDCASE** or **EXITSWITCH** is encountered. If another **CASE** is encountered, it's skipped and execution will fall through to the next set of commands following that **CASE** command. The **ENDCASE** command is an implied **EXITSWITCH**; once an **ENDCASE** is encountered, the only commands that can follow it are another **CASE**, a **DEFAULT** or an **ENDSWITCH**.

**SWITCH** command blocks can be nested if required.

The **DEFAULT** command is optional, but there must be only one occurrence of it within a **SWITCH** command block. If a **DEFAULT**

isn't used (and none of the **CASE** commands were matched), no action takes place at all.

**CASE** and **DEFAULT** statements can occur in any order, but if a match is made with more than one **CASE** command, only the statements following the first matched **CASE** command will be executed.

If you're using strings with **SWITCH**, you can control the case-sensitivity of a match with the **SET SWITCHCASE** statement.

You can use the **SWITCH** command phrase to allow a user to make a choice, and then perform different tasks depending upon the option selected. A menu system can be created using the **SWITCH** command phrase together with the **BOX**, **ATSAY** and **ATGET** commands.

### **See also**

**CASE**, **DEFAULT**, **ENDCASE**, **SET SWITCHCASE**, **ENDSWITCH** and **EXITSWITCH**.

## ***TERMINAL***

---

Exits the script file and returns to Terminal mode (without disconnecting).

### **TERMINAL**

#### **Comments**

The commands **EXIT** and **CONNECT** are synonyms for **TERMINAL**; all three perform the same function.

### **See also**

**BYE**, **CONNECT**, **EXIT** and **QUIT**.

## TERMKEY

---

Processes the keycode value represented by an integer and performs the corresponding program function.

**TERMKEY** *integer*

### Example

**termkey 0x2000**

Calls the Dialing Directory (0x2000 is the keycode for **Alt-D**).

### Comments

Typically, TERMKEY is used with the SET KEYS ON statement to “intercept” keystrokes. If the keycode value corresponds to a program function (such as the Dialing Directory), that function will be performed. If the value corresponds to a “special” key (for instance, the function keys **F1** through **F10**), PROCOMM PLUS sends the Keyboard Map codes for the current emulation for that key. If the value is a standard key (like a letter of the alphabet), the keycode will be sent to the remote unchanged.

TERMKEY treats the keycode value as unsigned.

### See also

HITKEY, SET KEYS, KEYGET and KEY2ASCII.

## TERMRESET

---

Resets the terminal mode display. The screen is cleared, the cursor is moved to row 0, col 0 and the emulation is re-initialized.

**TERMRESET**

## TERMWRT

---

Displays the ASCII character corresponding to the keycode value at the current cursor position and moves the cursor to the next available location.

**TERMWRT** *integer*

### Example

**integer** char=65  
**termwrt** char

Displays the character contained in the integer CHAR ("A") at the current cursor position. The cursor is moved to the next available position.

### Comments

The keycode value is treated as unsigned, and range checking is suppressed for this command. Unlike WRITEC, no conversion is done on the value.

### See also

WRITEC, KEYGET, HITKEY, SET KEYS and MESSAGE.

## TIME

---

Places the current time into a string variable.

**TIME** *string* 0|1

0|1

0 = Regular AM/PM format—  
HH:MM:SSAM or HH:MM:SSPM  
1 = 24-hour military format—  
HH:MM:SS

**Example**

**string current**  
**time current 1**

Gets the system time and places it in string variable CURRENT in 24-hour military format.

**See also**

\$TIME0, \$TIME1 and DATE.

**TRANSMIT**

Sends a character string to the remote system or to the modem.

**TRANSMIT** *string*

*string*

May contain non-printing characters using standard translation conventions (see "Translating Control Codes" in the USER MANUAL appendix titled "Technical Information").

**Examples**

**transmit "ATDT1 314 875-0503^M"**  
**pause 10**

Transmits dial command and phone number to modem number and then pauses 10 seconds.

**string id**  
**if connected**

Tests for connection; performs additional processing if connected.

**.**  
**.**  
**.**  
**endif**  
**message "Enter your ID"**  
**get id**  
**transmit id**  
**transmit "^M"**

Receives user id from local user. Send to remote system ... with a carriage return.

**transmit "Dave said "Hello"""**

Sends "Dave said "Hello"" to the remote system. If you want to send a quotation mark (") within the character string, you must precede it with the single back quote character ('). This back tic character (ASCII 96) is

on the key that has the tilde (~) above it.

### Comments

Note that TRANSMIT does *not automatically* add a carriage return at the end of a character string. To send one, use the ^M control code (as illustrated in the example).

## TYPE

---

Displays a file to the local screen with paging support.

**TYPE** *filespec*

*filespec*

A valid filename or path and filename.

### Comments

TYPE should only be used with ASCII text files. It's equivalent to the Terminal mode View File command.

## ULINEON

---

Turns on the underline attribute for Terminal mode display.

**ULINEON**

### See also

REVON, BOLDON, DIMON and NORMON.

## UNDEF

---

Removes the current definition of a previously-DEFINED macro.

**UNDEF** *name*

### Examples

**UNDEF MYNAME**

Removes the macro definition for the name MYNAME.



## Comments

UNDEF is paired with a DEFINE command to create a “region” in a script where an identifier has a special meaning. UNDEF must also be used prior to redefining a macro that was previously DEFINED.

### See also

DEFINE and \$IFDEF.

## USERMSG

---

Displays a message centered in a box on the local screen.

**USERMSG** *string*

*string*

A string of up to 80 characters.

### See also

A short bell sound accompanies the message. The message will be erased when the user presses a key (or, if no action is taken, in two seconds).

### See also

ERRORMSG and STATMSG.

## VIDREST

---

Restores the screen with video buffer data from a specified memory buffer.

**VIDREST** *index*

*index*

Specifies the screen memory buffer containing the data to restore—values can range from 0 to 2.

### Example

```
vidsave 0
emulate ansi
vidrest 0
```

Saves the current contents of the video buffer into screen memory buffer 0, switches to ANSI emulation and restores the screen from that same buffer.

## Comments

The video buffer can only be restored once; to perform multiple restores, you must first **VIDSAVE** the data again or perform the restore from another active buffer index.

## See also

**VIDSAVE**.

# VIDSAVE

---

Saves the current video buffer data to memory.

**VIDSAVE** *index*

*index*

Specifies the screen memory buffer for this **VIDSAVE**—values can range from 0 to 2.

## Example

**vidsave 0**

Saves the current contents of the video buffer into screen memory buffer 0.

## Comments

Your script can use the **IF SUCCESS** or **IF FAILURE** statements to test whether or not the screen buffer was actually saved.

If **VIDSAVE** is called with an already-active index, the previous contents of the video buffer will be lost.

## See also

**VIDREST**.

## WAITFOR

---

Causes a pause in processing until a target string is received from the remote system.

**WAITFOR** *string* [*integer* | **FOREVER**]

<b><i>string</i></b>	A string of text and numeric characters up to 80 characters in length. You can also include control characters in the target. Case-sensitivity can be specified with the <b>SET WAITCASE</b> statement.
<b><i>integer</i></b>	An integer value, which determines how many seconds to wait for the target before timing out and continuing execution. If no delay nor <b>FOREVER</b> is specified, the default of 30 seconds will be used.
<b><i>FOREVER</i></b>	If this is specified for the delay, <b>PROCOMM PLUS</b> will wait indefinitely for the target; it will not time out.

### Examples

**waitfor "first name:" 45**

Waits 45 seconds for prompt.

**if waitfor**

Tests and proceeds based on the result.

**transmit "TOM^M"**

**else**

**call error**

**endif**

**waitfor "^M^JBUSY"**

Uses control characters; waits for Carriage Return, Line Feed and "Busy".

### Comments

An exact match is required, but the match is not case-sensitive (unless you specify **SET WAITCASE ON**); for example, "ABC" matches "AbC", but not "BCA". **WAITFOR** times out and allows processing to continue if the target string is not received in the specified time. The statement **IF WAITFOR** on a line following the **WAITFOR** command returns a "TRUE" if the target string was received; a "FALSE" is returned if a timeout occurred or the **[Esc]** key was pressed.

**WAITFOR** can be exited with the **[Esc]** key.

## See also

WAITQUIET, SET WAITCASE, PAUSE and SUSPEND UNTIL.

# WAITQUIET

---

Waits up to a specified time until the receive data line has been inactive for a number of seconds.

**WAITQUIET** [*integer*[*integer* | FOREVER]]

*integer*

The amount of time (in seconds) that the line must be inactive. The default for this optional field is 15 seconds.

*integer* | **FOREVER**

The amount of time (in seconds) that PROCOMM PLUS will wait to satisfy the first parameter (FOREVER forces the script to pause indefinitely until the line is quiet the required number of seconds). The default is for this optional field 30 seconds.

## Example

**waitquiet 20 forever**

Pauses execution of the script indefinitely until the receive data line is inactive for 20 seconds.

**waitquiet**

If none of the optional parameters are used, WAITQUIET pauses execution of the script for up to 30 seconds while waiting for the receive data line to be inactive for 15 seconds.

## Comments

WAITQUIET can be exited with the **[Esc]** key.

The IF SUCCESS and IF FAILURE statements allow you to test a WAITQUIET operation.

## See also

WAITFOR, PAUSE and SUSPEND UNTIL.

## WHEN

---

Forces an automatic response or procedure CALL when a particular target string is encountered.

Once a WHEN command is entered, it remains in effect until either a CWHEN command is encountered or the script terminates.

**WHEN** (*index string* | DISCONNECT) {TRANSMIT *string* | CALL *name*}

<i>index</i>	The identifying index number for this WHEN statement. Up to 3 WHEN commands can be in effect, with indexes ranging from 0 to 2.
<i>string</i>	The string used to trigger the action. Control characters can be included.
<b>DISCONNECT</b>	Indicates an action to take if carrier is lost or not present. DISCONNECT is automatically cleared as soon as it's triggered.
<b>TRANSMIT</b> <i>string</i>	Transmits the characters contained in the response string. Control characters can be included.
<b>CALL</b> <i>name</i>	CALLS the specified procedure, which cannot require any parameters.

### Example

when 0 "more?" transmit "Y^M"

Sends a "Y" followed by a carriage return each time the prompt "MORE?" is received.

### Comments

Up to 3 WHEN commands can be active at one time.

The SET WHENCASE command allows you to specify whether the comparison is case-sensitive.

The trigger string should be null-terminated. Only up to the first 40 characters of the trigger string are recognized.

### See also

WAITFOR, TRANSMIT, CALL and SET WHENCASE.

## WHILE

---

Repeats a series of commands until the condition becomes "FALSE".

**WHILE** *condition*

### Example

```
while num < 100
```

```
·  
·  
·
```

```
endwhile
```

Performs a block of commands **WHILE** the integer variable **NUM** remains less than 100.

### Comments

The valid conditional expressions for **WHILE** are the same as those available with the **IF** command, with the addition of the **FOREVER** option. The commands **LOOPWHILE** and **EXITWHILE** may also be used in a **WHILE** block.

**FOREVER** creates an infinite loop within a **WHILE** construct.

**LOOPWHILE** branches directly to the **WHILE** conditional test from anywhere within the command block.

**EXITWHILE** exits the **WHILE** loop and branches to the command following the **ENDWHILE** command.

### See also

**EXITWHILE**, **LOOPWHILE**, **ENDWHILE** and **IF**.

## WRITEC

---

Performs emulation conversion and displays or acts upon the provided character value. The cursor position is updated where appropriate.

**WRITEC** *integer*

### Example

```
integer char=65
writec char
```

Converts the integer value in CHAR based on the present emulation and displays it at the current cursor position.

### Comments

WRITEC interprets the keycode value represented by the integer based on the current terminal emulation. If the keycode corresponds to an emulation function, that function is performed; otherwise, WRITEC behaves exactly like TERMWRT. It displays the ASCII character corresponding to the keycode value and moves the cursor to the next available position.

The keycode value is treated as unsigned, and range checking is suppressed.

### See also

TERMWRT, KEYGET, HITKEY, SET KEYS, KEY2ASCII and MESSAGE.

## XOR

---

This command performs a bitwise comparison of two numbers and places the result in the specified numeric variable. For each two bits compared, the resulting variable is assigned the value 1 or 0 in the same corresponding bit position. A 1 is assigned if 1 bit is 1 and the other is 0. A zero is assigned if both bits are the same.

**XOR** *number number numvar*

### Comments

XOR cannot be used with floating point numbers.

The *command* form “XOR N0 N1 N2” is equivalent to the *operator* form “N2=N0^N1”.

### See also

OR and AND.

## ZERO

---

Compares a number with zero. The integer variable is assigned 1 if the number is zero, and 0 if the number is non-zero.

**ZERO** *number intvar*

### Comments

ZERO and NOT function identically.

### See also

NOT.

## System Variables

For a general discussion of system variables and their uses, please refer to the beginning of this chapter.

<b>\$COL</b>	The current column cursor position.
<b>\$DATE</b>	The current system date (in the format mm/dd/yy).
<b>\$FATTR</b>	The attributes of the last file returned by a <b>FINDFIRST</b> or <b>FINDNEXT</b> command.
<b>\$FDATE</b>	The creation date of the last file returned by a <b>FINDFIRST</b> or <b>FINDNEXT</b> command (in the format mm/dd/yy).
<b>\$FEXT</b>	The extension (up to three characters following the period in a filename) of the last file returned by a <b>FINDFIRST</b> or <b>FINDNEXT</b> command.
<b>\$FILENAME</b>	The full filename (including extension) of the last file returned by a <b>FINDFIRST</b> or <b>FINDNEXT</b> command.
<b>\$FNAME</b>	The base filename (excluding extension) of the last file returned by a <b>FINDFIRST</b> or <b>FINDNEXT</b> command.



<b>\$FSIZE</b>	The size (in bytes) of the last file returned by a <b>FINDFIRST</b> or <b>FINDNEXT</b> command.
<b>\$FTIME</b>	The creation time for the last file returned by a <b>FINDFIRST</b> or <b>FINDNEXT</b> command (in the format HH:MM).
<b>\$NULL</b>	Always a "null" (or empty) character; this system variable is usually used to test another string variable for the null condition. An empty string ("" ) acts as a synonym for <b>\$NULL</b> .
<b>\$ROW</b>	The current row cursor position.
<b>\$SCRNCOLS</b>	The number of rows in your current video mode.
<b>\$SCRNROWS</b>	The number of rows in your current video mode.
<b>\$TERMBOLD</b>	The color used for high-intensity characters in Terminal mode.
<b>\$TERMDIM</b>	The color used for low-intensity characters in Terminal mode.
<b>\$TERMNORM</b>	The color used for normal characters in Terminal mode.
<b>\$TERMREV</b>	The color used for reverse characters in Terminal mode.
<b>\$TERMULINE</b>	The color used for underlined characters in Terminal mode.
<b>\$TIME0</b>	The current system time (in the format HH:MM:SSAM or HH:MM:SSPM).
<b>\$TIME1</b>	The current system time (in 24-hour military format HH:MM:SS).

The following group of system variables allows you to test a session or operation for a specific condition. Unless otherwise indicated, each has two possible values: a 0 (indicating FALSE) and a 1 (indicating TRUE).

<b>COMDATA</b>	Returns the current status of available characters in the receive data buffer. If RXDATA is set OFF, available characters will be processed between script commands; therefore, it's possible that the status of COMDATA may change from "TRUE" to "FALSE" by the time your script actually uses it. The only method to ensure that COMDATA will remain "TRUE" is to SET RXDATA ON. There is no way to guarantee that COMDATA will remain "FALSE", since data can be received at any time.
<b>CONNECTED</b>	Indicates whether or not the Carrier Detect (CD) signal is high (indicating that PROCOMM PLUS is currently connected to another system). If your modem forces CD high, CONNECTED will always be "TRUE".
<b>FAILURE</b>	Indicates if the last testable ASPECT operation (like writing to a file or creating a directory) did <b>not</b> complete successfully.
<b>FOREVER</b>	This unique system variable will <b>always</b> return a value of 1, allowing you to easily create "infinite" WHILE loops (as in the statement WHILE FOREVER).
<b>FOUND</b>	Denotes that a matching filename has been found by a FINDFIRST or FINDNEXT statement. Additionally, FOUND can be used to indicate a match by a FIND statement.
<b>FROMDDIR</b>	Contains the Dialing Directory entry number which invoked the currently-executing script; otherwise, the value is 0.
<b>HITKEY</b>	Contains the keycode of the next available key; otherwise, the value is 0.
<b>MONO</b>	Indicates whether or not the local computer is using a monochrome monitor.
<b>SUCCESS</b>	Indicates if the last testable ASPECT operation completed successfully.
<b>WAITFOR</b>	Denotes whether or not the last WAITFOR statement received the specified string (and therefore completed) before timing out.

The following group of system variables allows you to read the information from a Dialing Directory entry. Any system variable with the "\$D\_" convention will contain the corresponding value from the last directory entry with a successful connection (otherwise, the contents are undefined). If you access the Dialing

Directory again, the contents of these variables will be changed. To access the information from a particular entry, use the SET DIALENTY statement before using these variables.

<b>\$D_BAUD</b>	The baud rate for this entry. Valid values are 300, 1200, 2400, 4800, 9600, 19200, 38400, 57600 and 115200. A long value.
<b>\$D_DATABIT</b>	The number of data bits. An integer value.
<b>\$D_DUPLEX</b>	The duplex setting for this entry (either 0 for Full or 1 for Half). An integer value.
<b>\$D_ENTRY</b>	The entry number (as displayed within the Dialing Directory). An integer value.
<b>\$D_KBDFILE</b>	The keyboard file. A string value.
<b>\$D_LDATE</b>	The last call date for this entry. A string value.
<b>\$D_METAKEY</b>	The Meta key file for this entry. A string value.
<b>\$D_MODE</b>	The connection type for this entry. An integer value; 0 indicates a modem connection, while 1 indicates a direct connection.
<b>\$D_NAME</b>	The name identifying this entry. A string value.
<b>\$D_NOTE</b>	The *.NOT filename for this entry (as used by the Jot function). A string value.
<b>\$D_PARITY</b>	The parity for this entry (0 for None, 1 for Odd, 2 for Even, 3 for Mark and 4 for Space). An integer value.
<b>\$D_PHONE</b>	The phone number for this entry. A string value.
<b>\$D_PORT</b>	The COM port used by this entry (values range from 1 to 8). An integer value.
<b>\$D_PROTO</b>	The protocol used by this entry. Values can range from 0 to 17 (for a listing of protocol keywords and their values, refer to the definition for FETCH in this chapter). An integer value.
<b>\$D_PWORD</b>	The password for this entry. A string value.
<b>\$D_SCRIPT</b>	The script name for this entry; a string value.
<b>\$D_STOPBIT</b>	The stop bit setting (either 1 or 2). An integer value.

<b>\$D_TERM</b>	The terminal emulation type used by this entry. Values can range from 0 to 32 (for a listing of emulation keywords and their values, refer to the definition for <b>FETCH</b> in this chapter). An integer value.
<b>\$D_TOTAL</b>	The total number of successful connections for this entry. An integer value.

The following group of system variables are used with Host mode; any system variable with the "\$H\_" convention will provide information on the last caller who successfully logged on to your Host system.

<b>\$H_BAUD</b>	This long variable contains the baud rate at which the last user connected to Host.
<b>\$H_ELAPSED</b>	Total elapsed time of the last user's session. This is a string variable.
<b>\$H_LEVEL</b>	The user's access level. Possible values are 0, 1, and 2; if the logon was unsuccessful (Host didn't allow the user into the system), this variable is set to -1. An integer value.
<b>\$H_NAME</b>	The last user's name (in "firstname lastname" format). This is a string variable.
<b>\$H_OFFLINE</b>	The time the last user disconnected (in 24-hour format). This is a string variable.
<b>\$H_ONLINE</b>	The time the last user connected (in 24-hour format). This is a string variable.

# Compiling ASPECT

---

Overview .....	196
ASPCOMP Technical Notes .....	197
<i>The Compiling Process</i> .....	197
<i>Using a Symbol Map and Line Reference</i> .....	197
Upgrading Scripts from PROCOMM PLUS 1.x .....	198
Using CONVERT .....	198
<i>Writing Scripts for Efficiency</i> .....	203

## Overview

---

This chapter discusses the compile process (which we introduced in Chapter 1) in more detail.

For those users who are “upgrading” scripts from earlier revisions of PROCOMM PLUS, Chapter 3 will provide a wealth of valuable information. An example 1.1B source program will be **CONVERTed** and compiled—and then we’ll demonstrate changes that you can make to your upgraded scripts to make them more efficient, easier to understand and easier to maintain.

## ASPCOMP Technical Notes

---

### The Compiling Process

For those interested in the inner workings of ASPCOMP, let's take a moment to describe both *passes* made by the compiler in detail:

- **Pass 1—Checking for Errors.** The compiler makes a first pass through your source program, specifically checking for errors *before* the compiled code is generated. Pass 1 includes a thorough check of the source program's syntax. Errors are reported as they're discovered, and warning messages may be displayed concerning potential problems (depending on the /W option setting). If the number of errors specified by the /E option are found in pass 1, ASPCOMP will abort the compile process (without performing pass 2, where the output file is created).
- **Pass 2—Compiling the Script.** If the code is validated by the first pass, the compiler begins the "tokenizing" process. Command words and keywords are converted to tokens, and specific file offsets are generated for each conditional statement—these offsets greatly enhance the speed at which procedure CALLs and label jumps are performed within your compiled script. For security, constants are converted to shorter groups of encrypted characters.
- **Setting the Exit Code.** As ASPCOMP terminates, it generates an "exit code" that can be tested in a DOS batch file or parent process. If the script compiled successfully, ASPCOMP returns a "0"; if an error occurred during compilation, a "-1" is returned.

### Using a Symbol Map and Line Reference

ASPCOMP includes two features that can provide you with valuable information as you're writing and debugging scripts. As we mentioned in Chapter 1, the /M option generates a source file summary, while the L switch (used in conjunction with /M) creates an additional line reference table; both sets of data are written to the same file, which carries an extension of ".MAP". Let's examine the output you'll receive when you specify these options during a compilation.

**Note that a .MAP file is only created if the compile completes successfully!**

The Line Reference Table (invoked by the L switch) consists of two columns labelled "Line" and "Offset". Each *line* of the source program that generates compiled code carries a corresponding beginning *offset* value that ASPECT displays as part of its run-time error messages (if you SET ASPDEBUG ON)—this allows you to trace problems that occur within your compiled script back to the line (or lines) of source code causing the error. Comment blocks are ignored.

The Output File Summary (invoked by the /M option) includes similar information for each procedure, including:

- its size (in bytes).
- its beginning offset.
- the number of labels (with their names).
- the number of parameters (with their names).
- the number of local variables.
- the number of times the procedure was CALLED.
- the number of times it CALLED other procedures (with their names).

The summary also displays totals for the entire script.

## ***Upgrading Scripts from PROCOMM PLUS 1.x***

---

### **Using CONVERT**

The CONVERT utility is designed to make the switch from PROCOMM PLUS 1.x standalone script files to compiled ".ASX" scripts as easy as possible. CONVERT can modify most of your present ASPECT scripts with the "basics" required for a successful compile.

If the script you wish to convert is in the current directory, you can run CONVERT from the DOS prompt:

- Type **CONVERT [options] scriptname** and press **[Enter]**.

The options are:

- |            |  |
|------------|--|
| <b>/C</b>  | Suppresses the CONVERT header and comments normally placed in the output file.   |
| <b>/En</b> | Determines the maximum errors to allow for the conversion; if more than <i>n</i> errors are found by CONVERT, it will abort automatically. The default is 20 errors. |



/T

Provides *terse* error messages. Specifying this option will substitute one-sentence error messages for the default detailed text (with probable solutions). If you're familiar with CONVERT, this option can save time.

As an example of the changes CONVERT will make to your existing script files, we'll convert the 1.1B script "HOSTXFER.ASP" and compile it.

HOSTXFER.ASP automates a session with a remote system running PROCOMM PLUS Host; it logs on, prompts the user for the names of files to send and get and logs off. The complete 1.1B script file looks like this:

```

;*
;*  HOSTXFER.ASP (C) 1989 DATASTORM TECHNOLOGIES, INC.
;*
;*  YOU'LL NOTE SOME PROMPTS FROM THE HOST ARE SENT TWICE.  THIS
;*  ENSURES THAT THE TIMING BETWEEN SYSTEMS IS CORRECT.
;*
;*
;*  STEP 1 - SET USER VARIABLES AND DIAL
;*
ASSIGN S0 "JOHN PUBLIC"      ;* INSERT YOUR NAME HERE
ASSIGN S1 "JOHN"             ;* AND YOUR PASSWORD HERE
WHEN "-MORE-" "^M"
SET TXPACE 50
IF NOT LINKED
    DIAL "1"                  ;* SET THIS TO THE PROPER DIR ENTRY
ENDIF
;*
;*  STEP 2 - LOGS YOU INTO THE PROCOMM PLUS HOST COMPUTER.
;*
PAUSE 3
GETNAME0:
TRANSMIT "^M"
WAITFOR "NAME:"
IF NOT WAITFOR
    GOTO GETNAME0
ENDIF
TRANSMIT S0
TRANSMIT "^M"
PAUSE 1
TRANSMIT "Y"
PAUSE 3
SENDPASS:

```

```

TRANSMIT S1
TRANSMIT "^M"
WAITFOR "VERIFY:" 5
IF WAITFOR
    PAUSE 1                                ;* RESENDS YOUR PASSWORD
    GOTO SENDPASS                          ;* IF YOU'RE A NEW USER
ENDIF
TRANSMIT "^M"
;*
;* STEP 3 - PROMPTS FOR THE FILENAME TO UPLOAD
;*
GETNAME1:
BOX 0 0 4 67 15
ATSAY 1 3 7 "ENTER THE FILE TO 'UPLOAD' (SEND TO HOST), OR"
ATSAY 2 5 7 "HIT JUST <ENTER> TO SKIP THIS STEP:"
ATSAY 3 3 7 ">"
ATSAY 3 64 7 "<"
ATGET 3 4 15 60 S2
SWITCH S2
    CASE "_NULL"
        CLEAR
        GOTO GETNAME2
    ENDCASE
ENDSWITCH
ISFILE S2
IF FAILURE
    SCROLL 0 2 2 3 49 7
    ATSAY 2 3 15 "FILE NOT FOUND!"
    ALARM 1
    PAUSE 1
    GOTO GETNAME1
ENDIF
CLEAR
;*
;* STEP 4 - PERFORMS THE UPLOAD USING YMODEM BATCH
;*
PAUSE 1
TRANSMIT "U"                                ; SELECT UPLOAD FUNCTION
PAUSE 1
TRANSMIT "Y"                                ; SELECT YMODEM BATCH
WAITFOR "NAME?"
PAUSE 1
TRANSMIT S2                                ; SEND FILENAME
TRANSMIT "^M"
PAUSE 1

```

```

TRANSMIT "^M"           ; ENTER FOR DESCRIPTION
PAUSE 3
SENDFILE BYMODEM S2     ; SEND THE FILE!
PAUSE 3
;*
;* STEP 5 - PROMPTS FOR THE FILENAME TO DOWNLOAD
;*
GETNAME2:
BOX 0 0 4 67 15
ATSAY 1 3 7 "ENTER THE FILE TO 'DOWNLOAD' (RECEIVE FROM HOST) OR"
ATSAY 2 5 7 "HIT JUST <ENTER> TO SKIP THIS STEP:"
ATSAY 3 3 7 ">"
ATSAY 3 64 7 "<"
ATGET 3 4 15 60 S2
SWITCH S2
    CASE "_NULL"
        CLEAR
        GOTO TRYAGAIN
    ENDCASE
ENDSWITCH
CLEAR
;*
;* STEP 6 - TELL HOST TO SEND FILE, ENABLE RECEIVE
;*
TRANSMIT "^M"
PAUSE 1
TRANSMIT "D"
PAUSE 1
TRANSMIT "Y"
PAUSE 1
TRANSMIT S2
TRANSMIT "^M"
WAITFOR "PROCEDURE" 10
IF WAITFOR
    GETFILE BYMODEM
    PAUSE 3
ELSE
    MESSAGE "FILE NOT FOUND!"
    ALARM 2
    GOTO GETNAME2
ENDIF
;*
;* STEP 7 - ASKS WHETHER TO TRANSFER MORE FILES
;*
TRYAGAIN:

```

```

BOX 0 0 2 34 15
ATSAY 1 3 7 "TRANSFER MORE FILES? (Y/N)"
ATSAY 1 30 15 "NO"
CURON
LOCATE 1 30
KEYGET S3
SWITCH S3
    CASE "Y"
        GOTO GETNAME1
    ENDCASE
ENDSWITCH
CLEAR
;*
;* STEP 8 - LOGS YOU OFF!
;*
BIYA:
TRANSMIT "^M"
WAITFOR "CHOICE?"
IF NOT WAITFOR
    GOTO BIYA
ENDIF
TRANSMIT "G"

```

To convert HOSTXFER.ASP:

- Copy it into the same directory as CONVERT.
- Type `CONVERT /C HOSTXFER` and press **Enter**.

Note that we used the /C option. By default, CONVERT adds a commented "header" to the output source program; since the identifying information wasn't required for this example, we omitted it with the /C option.

CONVERT will make the following changes to the 1.1B ASPECT script file:

- The PROC MAIN and ENDPROC statements are added to the beginning and end of the script, respectively. **Remember, every ASPECT source program must contain a procedure named MAIN!**
- The WHEN statement in Step 1 becomes  
**WHEN 0 "-MORE-" TRANSMIT "^M"**

Since up to 3 WHEN commands can now be active, CONVERT supplies the index "0". The TRANSMIT parameter (which was not required in earlier versions of ASPECT) is also added.

- The CASE "\_NULL" conditions used by the SWITCH commands in Steps 3 and 5 are replaced with CASE \$NULL. The new system variable \$NULL can appear anywhere in your script where a string constant can appear.
- The KEYGET in Step 7 is replaced by the statements  

```
KEYGET AUX_INT_1
KEY2ASCII AUX_INT_1 S3
```

The global integer variable AUX\_INT\_1 (declared at the top of the script) holds the value for the key pressed by the user. Since KEYGET now supports only integer variables, the KEY2ASCII command must be used to convert the key's integer value into the string variable S3.

Now that CONVERT has performed the basics necessary to compile HOSTXFER.ASP, it can be used with PROCOMM PLUS—however, since CONVERT cannot rewrite a script, HOSTXFER.ASP isn't as efficient, clear or easily-modified as it could be!

## Writing Scripts for Efficiency

There are a number of general rules you can follow to make your compiled scripts clearer and more efficient:

- **Use a Structured Approach.** Previous versions of ASPECT favored programs written to "flow" from beginning to end (a style usually called "unstructured"). Compiled ASPECT is a structured, procedure-oriented language.
- **Avoid GOTOs.** Instead of performing a GOTO, CALL a procedure. Procedures can contain more than one process; the current function of such a "multi-purpose" procedure can be determined through the value of a flag or passed parameter.
- **Use Full Variable Names.** Although the Sx and Nx predefined variables still exist (and will still work), a script becomes much easier to read, understand and maintain if you define your own names for variables. The predefined variables must be used, however, if you need to preserve the value of a variable when chaining to another script with the EXECUTE command.
- **Avoid Multiple Exits.** Ideally, only a single "exit" point (where the user ends program execution) should be included within a script. Multiple exits make a source program harder to read and can cause errors.
- **Use Local Variables.** Global variables are indeed easy-to-use, but they can also create problems. By localizing variables, you avoid accidental changes to the same variable in other areas of the program—and the time it takes to track down such bugs!

- **Use Staggered Code Indentation.** Logical indentation in a program can dramatically increase its clarity, allowing you to easily note the beginning and ending points for procedures and conditional blocks. Since ASPCOMP ignores indentation and comments in your source programs, it's recommended that you both comment and indent your code heavily.

In the last section, we used CONVERT to upgrade the sample script HOSTXFER.ASP. Let's take HOSTXFER.ASP one step further:

- First, let's move each routine into a separate procedure; for our example, we'll use the LABEL names as the new procedure names.
- To make the source more readable, we'll use lowercase throughout the script and logically indent each conditional block.
- As mentioned earlier, the predefined variables S0 and S1 could have been left intact; for clarity, however, we'll change them to user-defined string variables.
- The MAIN procedure will now hold a structured loop, executing the procedures GETNAME1, GETNAME2, TRYAGAIN and BIYA.
- The procedure TRYAGAIN will now use an integer parameter (passed by reference) called "ACTION"; this value is returned to the MAIN procedure as a decision flag.

Our rewritten HOSTXFR2.ASP looks like this:

```

;*
;* hostxfr2.asp (c) 1990 datastorm technologies, inc.
;* You'll note that some prompts from the host are sent twice. This
;* ensures that the timing between systems is correct.
;*
define TRUE 1
define FALSE 0
define NAME   "Chip Tawdry"
define PASSWORD "BigB"

proc main

    Integer action                ;Selection variable
    action = TRUE                ;At least once through the loop.
    ;*
    ;*  INITIALIZATION
    ;*
    when 0 "-more-" transmit "^m"

```

```

when 1 "any key to" transmit "^M"
set tspace 100
call logtohost                ;Call login routine
clear
while (action == TRUE)        ;Until user chooses not to
    call getname1              ;Call upload routine
    call getname2              ;Then call download routine
    call tryagain with &action ;Then call confirm
endwhile
call biya                      ;Call logoff routine.
endproc
;*
;* LOGS YOU INTO THE PROCOMM PLUS HOST COMPUTER.
;*

```

```

proc logtohost
    if not connected           ;if CD low
        if not fromddir        ;And not called by dialer
            dial "1"            ;dial this entry
        endif
    endif                       ;answer logon prompts
    pause 1
    transmit "^m"
    waitfor "name:"
    transmit NAME
    transmit "^M"
    pause 1
    transmit "y"
    waitfor "password"
    transmit PASSWORD
    transmit "^M"
    waitfor "verify:" 2
    if waitfor
        transmit PASSWORD
        transmit "^M"
    endif
    transmit "^M"
endproc
;*
;* PROMPTS FOR THE FILENAME TO UPLOAD
;*

```

```

proc getname1

    string filewanted           ;File desired for download

```

```

while forever
    filewanted = ""                ;Clear old value of filewanted
    box 0 0 4 50 15
    atsay 1 3 7 "Enter the file to UPLOAD (send to host),"
    atsay 2 3 7 "or hit just <enter> to skip this step:"
    atsay 3 18 7 ">"
    atsay 3 31 7 "<"
    atget 3 19 15 12 filewanted
    if null filewanted              ;did we hit just <enter>?
        exitwhile                  ;if we did then get out
    endif
    isfile filewanted              ;check existence of the file
    if failure                      ;if found, then do_send proc
        scroll 0 3 2 3 47 7        ;is CALLED, else retry
        curoff
        atsay 3 18 15 "File not found!"
        alarm 1
        pause 1
        curon
    else
        clear
        call do_send with filewanted ;send the file
    endif
    clear
endwhile
clear
endproc
;*
;*  PROMPTS FOR THE FILENAME TO DOWNLOAD
;*

```

#### proc getname2

```

string filewanted
while forever
    box 0 0 4 50 15
    atsay 1 3 7 "Enter a file to DOWNLOAD (receive from host)"
    atsay 2 3 7 "or hit just <enter> to skip this step:"
    atsay 3 18 7 ">"
    atsay 3 31 7 "<"
    atget 3 19 15 12 filewanted
    strcmp filewanted $null        ;if the user inputs a null string
    if failure                      ;no download attempted
        clear
    endif
endwhile

```



```

        call do_receive with filewanted
        clear
    else
        exitwhile
    endif
endwhile
clear
endproc
;+
;+   PERFORMS THE UPLOAD USING ZMODEM
;+

```

**proc do\_send**

```

    strparm filewanted

    transmit "u"                ;select upload function
    pause 1
    transmit "Z"                ;select Zmodem
    pause 1
    transmit filewanted         ;send filename
    transmit "^m"
    sendfile zmodem filewanted ;send the file!
endproc
;+
;+   RECEIVES THE FILE FROM THE HOST
;+

```

**proc do\_receive**

```

    strparm filewanted

    transmit "d"                ;Select download
    pause 1
    transmit "Z"                ;Select ZMODEM protocol
    pause 1
    transmit filewanted         ;Tell it the filename
    transmit "^m"
    waitfor "procedure" 5
    if waitfor
        getfile zmodem         ;NO getfile zmodem necessary
    else                        ;as long as zmodem auto-download
        transmit "^M"          ;is enabled!!!
    endif
endproc

```

```

;*
;*   ASKS WHETHER TO TRANSFER MORE FILES
;*

```

```

proc tryagain

```

```

    intparm userchoice

```

```

    integer userkey

```

```

    box 0 0 2 34 15

```

```

    atsay 1 3 7 "transfer more files? (Y/n)"

```

```

    locate 1 30

```

```

    atsay 1 30 15 "no"

```

```

    curon

```

```

    keyget userkey           ;Get the keypress

```

```

    userchoice = FALSE

```

```

    if userkey == 'y' || userkey == 'Y'

```

```

        userchoice = TRUE

```

```

    endif

```

```

    clear

```

```

endproc

```

```

;*

```

```

;*   LOGS YOU OFF!

```

```

;*

```

```

proc biya

```

```

    transmit "^m"

```

```

    pause 1

```

```

    transmit "g"

```

```

endproc

```

To the user, the “flow” of HOSTXFR2.ASP remains the same (it now repeats, however, until the user explicitly chooses to stop). To the programmer, however, HOSTXFR2.ASP has been greatly improved! It’s easier to read and understand, the conditional processing it performs is more efficient—and future modifications will be much easier to perform.

In the next chapter, “Common ASPECT Questions”, we’ll review topics often covered by our Technical Support staff.

# Common ASPECT Questions

---

Overview .....	210
ASPECT Variables.....	211
File Input/Output .....	213
Display .....	214
Connecting to a Remote System .....	215
Accessing DOS.....	216
Transferring Files .....	217
Debugging.....	217

## Overview

---

A full-featured and powerful language like ASPECT often elicits questions from both novice and professional programmers alike—perhaps you’re looking for a more efficient way to perform a function, or your script unexpectedly pauses during execution.

If you’re experiencing a problem with an ASPECT script, check this chapter first! The following items have been identified as the most common questions asked by users calling our Technical Support staff.

Additionally, we’ll also include tips on programming “shortcuts” that may save you time and keystrokes.

## ASPECT Variables

---

### *How can I initialize a string variable to a null value?*

ASPECT supports the *direct assignment* of a value to each data type. To initialize to null (or empty), use the read-only system variable "\$NULL"—for example:

```
ANYVAR = $NULL
```

Here we have assigned the string variable ANYVAR a null value.

### *How can I make variables global or local?*

To automatically make a variable *global*, simply declare it outside of any procedure. Note that globals need not be placed at the top of the source program (they are, however, easier to locate if you do declare them at the top).

*Local* variables are defined from within a procedure. Remember, local variables only operate within their "home" procedure; don't make the mistake of attempting to use a local from another procedure!

```
LONG TOTAL = 170133
```

```
PROC MAIN
```

```
    STRING BILLNAME
```

```
ENDPROC
```

In this example, the long variable TOTAL is a global variable initialized to 170133 (since it occurs outside of the MAIN procedure), while we've defined BILLNAME as a local string variable.

### *How can I change a single character in a string?*

The STRPOKE command comes in handy here—try this method:

```
string="FILE0001.TXT" ;before
```

```
strpoke string 7 '2'
```

```
string="FILE0002.TXT" ;after
```

Note the use of the character constant '2' in the STRPOKE statement.

### *Why can't I compare two strings with the statement "IF string1 == string2"?*

Strings must be compared with the STRCMP command. The "==" equality operator can only be used with numeric variables or constants.

The **SUCCESS** or **FAILURE** system variables can be tested to determine if the strings are identical.

*Why is ASPECT returning the wrong value for my integer variable assignments?*

Check your value ranges for numeric variables; chances are that your values are larger than 32767 or smaller than -32768 (making them **LONG** values instead of integer). Declare them as **LONG** variables.

Is your value a fractional amount? **ASPECT** assumes that any value containing a decimal be defined as a **FLOAT** type (and should be assigned as a float variable to retain the fractional amount).

*How do passed parameters work? Why are the values I pass to a procedure never modified when I return to the CALLing procedure?*

You can instruct **ASPECT** to pass parameters by *reference* (any modifications made to the variable by the **CALLed** procedure are permanent) or by *value* (where the **CALL** sends only the value of the variable). To **CALL** by reference, prefix the variable name in the **CALL** statement with an ampersand ("&").

To illustrate passing parameters by reference, let's use the example procedure **READ\_SEC**:

```
PROC READ_SEC
  INTPARM X
  STRING TSTR
    TIME TSTR 0
    SUBSTR TSTR TSTR 6 2
    ATOI TSTR X
ENDPROC
```

You'll note that **READ\_SEC** "extracts" the seconds from the 12-hour format system time and then converts those seconds to an integer; the result is placed in an integer parameter named **X**. If we **CALL READ\_SEC** with the statement:

```
INTEGER SEC
CALL READ_SEC WITH &SEC
```

the variable parameter name **&SEC** indicates that the value is to be returned intact from the **CALLed** procedure.

To pass variable parameters in a **CALL** without allowing their value to change, simply omit the ampersand prefix.

For more information on passing parameters, please refer to the definitions for CALL and PROC in Chapter 2 of this manual.

***Why can't I use variables like "\$amount" and "amount\$"?***

The "\$" is reserved for ASPECT system variables, and should never appear in a user-defined variable name. Also, user-defined variables must begin with an alphabetic character (in either UPPER or lower case) or an underscore.

***Does ASPECT support operations like "IF VAR < 5 AND VAR > 6..."?***

Yes, ASPECT does support the AND operator; however, the example would return the error message "UNEXPECTED COMMAND" in a script. AND is a bitwise ASPECT command—in the above example, you would instead use the logical operator "&&". The example would correctly read:

```
IF VAR < 5 && VAR > 0...
```

## ***File Input/Output***

---

***I've opened a file as Read/Write—why isn't it working properly?***

Although an FOPEN command can access a file in Read/Write mode, you must perform an FSEEK or REWIND on the file before switching between read and write operations.

In this example, we both read and write to the same file:

```
long pointer
proc main
  string stuff
  fopen 0 "lo.dat" "WT+"
  fwrite 0 "1234567890" 10
  ftell 0 pointer
  fseek 0 pointer 0
  fread 0 stuff 10
endproc
```

Note that this example uses a text file; when using the FSEEK command, you must seek with an offset of 0 relative to the origin (or, as we did here, you can seek from the file's beginning with an offset from an FTELL command).

Where possible, it's suggested that a file be opened in a single mode (Read-Only or Write-Only, for example); this can reduce the risk of errors.

***Why does the statement "IF EOF 0" always seem to return FALSE as I write to a file?***

The EOF condition becomes TRUE after the first operation that attempts to read past the end of a file. It will remain TRUE until an FSEEK, FCLEAR or REWIND is performed.

***I'm working with a fixed-length file with records 80 characters long. Does ASPECT allow me to directly access each record?***

Yes—rather than read each record sequentially, use the FSEEK command to speed file access!

To illustrate, this example reads record 12 of that file directly:

```
proc main
  define recordlength 80
  integer total
  long position
  record=12
  total=recordlength+2      ;add CR/LF
  record=record-1           ;start at 0
  position=record*total     ;position of record
  fseek 0 position 0        ;point past start of file
  fread 0 line recordlength ;read the line
endproc
```

Note that the first record in this file is considered record 0.

## ***Display***

---

***Why does VIDREST work fine once, and then fail?***

If a screen has been VIDSAVED, it can only be restored once. If you need to restore a screen multiple times, simply perform another VIDSAVE and re-save the screen after each restore. Since you can VIDSAVE up to three screens, you could also save two additional "copies" of the same screen and restore them separately.



## ***Connecting to a Remote System***

---

***My logon script works erratically with Telenet and Tymnet. How can I fix it?***

Large switching networks like Tymnet and Telenet are sometimes slow when processing your sign-on data. Until you've connected to your destination service (like CompuServe), try slowing your system down slightly by SETting TXPACE to 100 or higher.

Alternately, you can insert pause characters in your script's TRANSMIT statements—the default pause character is a tilde (~).

***Why doesn't this BBS recognize succeeding carriage returns in my scripts?***

It may be necessary to send carriage returns separately instead of one immediately after another; unless the remote system can buffer the incoming data, the second carriage return may be "lost".

Instead of sending the string

**TRANSMIT "^M^M"**

try sending the string

**TRANSMIT "^M"**

**PAUSE 1**

**TRANSMIT "^M"**

As we mentioned earlier, it's always a good idea to keep the processing speed of the remote computer in mind when writing scripts.

***What changes do I need to make to logon scripts created with Record mode?***

First, shorten the WAITFOR strings to the final word (or characters) in each prompt. For example, the statement

**WAITFOR "^M^JNAME?^M"**

becomes

**WAITFOR "NAME?"**

Next, check to see if you need to add a PAUSE statement at the top of your script:

**TRANSMIT "^M"**

**WAITFOR "NAME?"**

In this example, your system may miss the WAITFOR string; to make sure that PROCOMM PLUS is prepared for incoming data, add a PAUSE statement:

**PAUSE 1**

**TRANSMIT "^M"**

**WAITFOR "NAME?"**

Finally, make sure that you trim extra statements from the beginning and end of your script.

## ***Accessing DOS***

---

***I'm trying to read the return value from DOS using the DOS command... but ASPECT always returns SUCCESS, even though the program failed!***

When you use the DOS command, ASPECT always tests the return value of COMMAND.COM, not the DOS program you ran. Unless PROCOMM PLUS can't locate or use COMMAND.COM (COMMAND.COM isn't in your current directory, DOS PATH or defined through the COMSPEC environment variable), a DOS statement will always return a SUCCESS condition.

If you require a return value, use the RUN command whenever possible; a RUN statement will return the SUCCESS or FAILURE of the program, not COMMAND.COM.

***I'm running PROCOMM PLUS on a floppy system. Why do I keep getting errors when I attempt to run a DOS program?***

ASPECT must load a second copy of COMMAND.COM to execute an external program with DOS or SHELL. The value of your "COMSPEC" environment variable points to the location of COMMAND.COM (you can type SET and press **Enter** at the DOS command prompt to display the value of COMSPEC).

Problems occur on a floppy-based system if you insert a different disk in your boot drive while PROCOMM PLUS is executing; make sure that COMMAND.COM is available within the path specified by COMSPEC.

## ***Transferring Files***

---

### ***Why do my SENDFILE and GETFILE operations abort or time out?***

First, make sure that a file transfer operation works manually (this may point out a problem with your modem setup, an invalid filename or a protocol mismatch). If the transfers work manually, you may have a timing problem—most file transfer protocols require fairly close cooperation between the sending and receiving computers. It's a good idea to "fine-tune" a script performing file transfers by inserting messages and pauses where necessary.

### ***My files transfer fine, but the WAITFOR immediately following the transfer is almost always ignored. What's going on?***

Depending on the processing speed of the remote computer, you may discover that the final "handshaking" required by some protocols (for example, YMODEM and ZMODEM) completes earlier on the remote system. Thus the characters that trigger the WAITFOR are sent before PROCOMM PLUS is ready for them, and the WAITFOR is never satisfied.

A good example of this is a BBS that sends out a prompt immediately after the transfer completes. In this case, a solution might be to send a character or carriage return to force the BBS to resend the prompt (or to simply assume that the prompt has been sent, and proceed anyway).

## ***Debugging***

---

### ***Without a TRACE mode, how can I debug my scripts?***

Since all syntax errors will be found by ASPCOMP during compilation, run-time errors will require debugging. Use the "/ML" options with ASPCOMP—this will create a symbol map, along with additional procedure execution and source line reference information.

Also, make sure you SET ASPDEBUG ON to display the offset error messages generated by ASPECT during execution.

With this information, you should be able to debug scripts accurately and quickly. Use the offset to locate the source line where the error occurred. Note that the error offset may refer to a location *between* two source offsets—this means that the error occurred somewhere in the middle of the source line with the lesser offset.

***How can I debug timing and sequence problems?***

If a particular section of your script is causing errors, a few well-placed MESSAGE or FATSAY display statements can help pin down the problem. Use them to display the current value of a variable, the name of the current procedure or to indicate the command currently being executed. Don't forget to remove these debugging statements after you've solved the problem!

In the next chapter, "Advanced ASPECT Examples", we'll discuss advanced ASPECT topics and review examples of Host mode "external" processing, file manipulation and remote commands.

# *Advanced ASPECT Examples*

---

Overview .....	220
Remote Commands and String Manipulation .....	220
Host Mode External Processing and File I/O .....	221

## Overview

---

In this chapter, we'll present two examples of advanced ASPECT script programming.

These sample source programs present procedures commonly found in two popular ASPECT applications—remote commands and external Host mode processing.

These scripts also use several of the “less-familiar” ASPECT command words. Although they're not required in many situations, these commands can save many lines of code (or perform specialized functions too complex for other languages).

Please note that:

- these examples are written for the expert ASPECT programmer—you should be comfortable with writing in ASPECT before attempting to modify these script procedures.
- for your convenience, these examples are available as .ASP files on the DATASTORM CompuServe Support forum and the DATASTORM BBS; additionally, some of them may be available on your distribution diskettes.

## Remote Commands and String Manipulation

---

First, we present REMOTE.ASP, which demonstrates the usefulness of remote commands and the power of string manipulation. Although short, REMOTE.ASP allows a remote computer (also using PROCOMM PLUS) to compile and load a script file that you've written on your PC! This provides an alternative to sending several remote commands separately, where each command would require separate compilation before execution.

The file you send can be in source or compiled form; the name of the file to send should be substituted in the **DEFINE REMFILE** statement.

***Note** The remote machine must have the Remote Commands Setup option ON for REMOTE.ASP to work!*

```
; REMOTE.ASP
; COPYRIGHT (C) 1990 DATASTORM TECHNOLOGIES, INC.

define REMFILE "$ASP_TMP"           ; filename received by remote

proc main
```

```

string filename,xmitfile,xmitstr
integer extndx
vidsave 0
box 4 18 18 60 14
atsay 5 24 15 "REMOTE SCRIPT EXECUTION FACILITY"
atsay 6 19 14 "_____ "
atsay 8 20 15 "Enter the ASPECT filename:"
atget 8 47 112 12 filename
isfile filename
if failure
    sound 220 10
    atsay 10 20 15 "File not found..."
    pause 3
else
    find filename "." extndx
    substr xmitfile filename extndx 4
    strupr xmitfile
    strfmt xmitfile "%s%s" REMFILE xmitfile
    atsay 10 20 15 "Sending script file to remote..."
    strfmt xmitstr "^Dgetfile xmodem ""%s""^M" xmitfile
    transmit xmitstr
    atsay 12 20 15 "Pausing for remote compilation..."
    pause 5
    sendfile xmodem filename
    if failure
        sound 220 20
        atsay 14 20 15 "Error sending file to remote"
        pause 3
    else
        pause 3
        atsay 14 20 15 "Sending EXECUTE command sequence..."
        strfmt xmitstr "^Dexecute ""%s""^M" xmitfile
        transmit xmitstr
        pause 3
        sound 440 20
        atsay 16 20 15 "Operation completed – Press any key"
        keyget
    endif
endif
vidrest 0
endproc

```

## *Host Mode External Processing and File I/O*

---

Next, we present a section of HOST.ASP, which performs external Host mode processing; note that this is a partial script, and will not function as presented here! The full version of HOST.ASP (with complete comments and description) is available through the same sources listed at the beginning of this chapter. HOST.ASP allows your Host system to selectively call back a user (to reverse the

telephone charges). It also sets up Host with a custom configuration each time you run it.

```
define HOSTUSRFILE "C:\PCPLUS\PCPLUS.USR"
define HOSTDLDIR "C:\PCPLUS\HOST_DM"
define HOSTULDIR "C:\PCPLUS\HOST_UP"
```

```
define HOSTCDXFER YES
define HOSTCONTYP MODEM
define HOSTHFLOW OFF
define HOSTMAXDIAL 3
define HOSTNEWUSR 0
define HOSTPORT COM1
define HOSTREMCMD OFF
define HOSTSFLOW OFF
define HOSTSHELCD ON
define HOSTSYSTYP CLOSED
define HOSTTIMOUT 5
define HOSTUSEDTR YES
define HOSTWELCOM ""
define FALSE 0
define TRUE 1
```

```
; GLOBAL DATA
```

```
string urec,uname,ufirst,ulast,upassword,uaccess,ucomment,ucbnumber
integer tempkey
```

```
; Function: MAIN
```

```
proc Main
```

```
    call Setup                                ; Setup port, modem, and variables

    while forever
        host                                ; Execute host mode
        if not success                       ; If ESC key or Abort command
            exitwhile                        ; EXIT loop and script
        endif
        if null $H_NAME                     ; If no successful login
            loopwhile                        ; loop to restart host
        endif
        uname = $H_NAME                    ; uname = "firstname lastname"
        call ParseUsrRec                    ; Find and parse user record
        if success                          ; If found and parsed:
            call CallBackRights              ; Does user has callback rights
            if success                       ; If he does:
                call WantsCB                ; See if he wants callback
                if success                   ; If he does:
                    call CallBack           ; Call him back
                endif
            endif
            loopwhile                        ; Loop to reenter host mode
        endif
```



```

        endif
        HOSTHANGUP                ; If not parsed or no rights, hangup
    endwhile

```

```
endproc
```

```

; Function: Setup
; Purpose: Initialize PROCOMM PLUS 2.0 for use as a BBS

```

```

proc Setup
    call SetupPort
    call SetupVars
    call SetupModem
endproc

```

```

; Function: SetupPort
; Purpose: Initialize the communications port

```

```

proc SetupPort
    set port      HOSTPORT
    set baud      HOSTBAUD
    set parity     NONE
    set databits  8
    set stopbits  1
endproc

```

```

; Function: SetupVars
; Purpose: Initialize system variables

```

```

proc SetupVars
                                                ; Make sure both mutually exclusive
    fopen 1 HOSTUSRFILE "rt"                ; Try to open user file
    if not success                            ; If unable, abort with message
        BOXMSG "Error opening user file."
    exit
endif
fclose 1

```

```

set host autobaud  HOSTAUTOBD ; Setup HOST variables using their
set host connection HOSTCONTYP ; definitions at the top of file
set host dldir     HOSTDLDIR
set host message   HOSTWELCOM
set host newuserlv HOSTNEWUSR
set host systype   HOSTSYSTYP
set host timeout   HOSTTIMOUT
set host uldir     HOSTULDIR
set host shellboot HOSTSHELCD

```

```

set callog          HOSTCALLOG ; Setup miscellaneous variables using
set cdinxfer        HOSTCDXFER ; their definitions at the top
set dropdtr         HOSTUSEDTR
set hardflow        HOSTHFLOW
set modem maxdial   HOSTMAXDIAL
set remotecmd       HOSTREMCMD

```

```

set softflow          HOSTSFLOW

set host goodbye      EXIT          ; callback mode

set keys              ON
set rxdata            ON
set msg_crlf         OFF
set switchcase       OFF

set kermit blockcheck 3            ; Setup protocols to be good hosts
set kermit filetype   BINARY
set kermit packsize   1024
set zmodem errdetect  CRC32
set zmodem recvcrash  PROTECT
set zmodem sendcrash  NEGOTIATE
set zmodem timestamp  OFF
set zmodem txmethod   STREAMING
endproc

```

; Function: SetupModem  
; Purpose: Initialize the modem for use by host mode

```

proc SetupModem
  Integer savetxpace
  fetch txpace savetxpace
  set txpace 150
  TX "ATZ^M"                ; reset to defaults
  mspause 500
  TX "ATV1^M~"              ; use verbal result codes
  mspause 500
  TX "ATQ0^M~"              ; use verbal result codes
  mspause 500
  TX "ATS7=60^M"            ; wait 60 seconds for CD
  mspause 500
  set txpace savetxpace
endproc

```

; Function: CallBack  
; Purpose: Hangup and dial the callback number.

```

proc CallBack
  string title
  if connected
    HOSTPUTS "'r'n'r'n Hangup now! Be sure your modem is set to answer."
    HOSTPUTS "'r'n You will be called back momentarily....'r'n'r'n"
    HOSTHANGUP
  if connected
    return
  endif
endif
strfmt title "Calling: %s" uname
mdial ucnumber title          ; Dial number in user record
endproc

```

**; Function: CallBackRights**  
**; Purpose: Check .USR comment field for special callBACK string**

**proc CallBackRights**

```
integer idx
find ucomment "CALLBACK[" idx ; Search comment for keyword
if found
    idx = idx + 9 ; idx -> 1st part of number
    substr ucnumber ucomment idx 80 ; Copy from number to end of line
    find ucnumber "]" idx ; Find terminator
    if found ; If found
        strpoke ucnumber idx 0 ; strip the rest of line
        SETSUCCESS ; and return success
        return
    endif
endif
SETFAILURE
endproc
```

**; Function: WantsCB**  
**; Purpose: Ask user if he wants to be called back.**

**proc WantsCB**

```
string response
HOSTPUTS ""r'n'r'n Would you like to be called back at "
HOSTPUTS ucnumber
HOSTPUTS "?r'n"
HOSTPUTS " Your choice (Y=Yes, H=Hangup now, C=cancel)? "

while forever ; Loop until we break out
    HOSTGETC &response ; Get a character
    if not success ; (If connection lost,
        exitwhile ; break with FAILURE set)
    endif
    SETFAILURE ; Assume not calling back
    switch response ; What do you want user?
        case "Y" ; If 'Y'
            SETSUCCESS ; change assumption
            exitwhile ; and break
            endcase
        case "H" ; If 'H'
            HOSTGOODBYE ; Say goodbye and hangup
            exitwhile ; break
            endcase
        case "C" ; If 'C' or dropped thru from 'H'
            exitwhile ; break
            endcase
    endswitch
endwhile
endproc
```

**; Function: \_HostGetc**  
**; Purpose: Input a character from the port or local keyboard**

```

proc _HostGetc
  strparm c
  integer l = -1

  while l == -1
    if hitkey                                ; If a key is pressed
      XKEYGET &l                             ; get the key
    endif
    if comdata                               ; If data available at port
      comgetc l                             ; get the next character
    endif
    if not connected                         ; If carrier drops
      SETFAILURE                             ; set error return code
      return                                 ; and return to caller
    endif
  endwhile
  key2ascii l c
  SETSUCCESS
endproc

```

; Function: ParseUsrRec  
 ; Purpose: Lookup user in .USR file and parse record into globals

```

proc ParseUsrRec
  integer l
  string tmp
  find uname " " l                          ; l = index of blank name separator
  strcpy ufirst uname l                     ; copy first name
  l++                                       ; l = index of last name
  substr ulast uname l 80                   ; extract last name
  strfmt tmp "%s;%s;" ulast ufirst         ; 'tmp' is what we're looking for
  strlen tmp l                             ; l = length of name part
  fopen 1 HOSTUSRFILE "rt"                 ; Try to open user file
  if success                               ; If opened
    while not EOF 1                         ; Loop until end of file
      fgetc 1 urec                          ; Get record
      strcmp urec tmp l                     ; Scan record for user
      if success                            ; If this is our guy,
        COPYSFLD &upassword urec &l FLD_SEP ; Copy password
        COPYSFLD &uaccess   urec &l FLD_SEP ; Copy access level
        COPYSFLD &ucoment   urec &l FLD_SEP ; Copy comment
        SETSUCCESS                               ; set return code to TRUE
        fclose 1                                ; close the file
        return                                 ; exit
      endif
    endwhile
  else
    BOXMSG "Error opening user file."
  endif
  fclose 1                                 ; close the file
  SETFAILURE
endproc

```

# *Appendices*

---

<b>Appendix A: PCEDIT Technical Notes .....</b>	<b>229</b>
<b>Appendix B: Compiler and Run-Time Errors .....</b>	<b>233</b>
<b>Appendix C: Reserved Words .....</b>	<b>243</b>
<b>Appendix D: Operators .....</b>	<b>251</b>





# PCEDIT Technical Notes

---

This appendix summarizes the commands available in **PCEDIT**, along with additional technical information. For details about the Setup fields controlling **PCEDIT**, see Chapter 8.

## PCEDIT NOTES

**PCEDIT** is a powerful ASCII text editor with both **ASPECT** and word processing functions; it handles lines up to 120 characters long, with a maximum of 5000 lines per file.

Multiple files can be edited at once, and two files can be viewed simultaneously. Use **Alt+** (or **Alt=**) and **Alt-** to traverse the list of files being edited. Information can easily be copied or moved between files. Two separate input modes are available; one tailored for writing **ASPECT** files, and one for word processing tasks.

When entering text, the full ASCII character range is supported except for the following values (which have special interpretations): 0 (null), 8 (backspace), 9 (tab), 10 (linefeed), 13 (carriage return), 27 (escape) and 255.

The command line syntax for **PCEDIT** is:

### **PCEDIT [options] filespec(s)**

*Filespecs* may include the "\*" and "?" wildcards, and multiple filespecs can be specified. All option switches are optional. Spaces must be used to separate each option and/or filespec. **PCEDIT** supports the following command line option switches:

**/B** Force use of black & white (monochrome) screen.

**/Ln** Go directly to line number n.

**/V** Start in split screen mode.

**/N** Suppress logo screen.

**/U** Use uppercase characters in **ASPECT** macros.

## PCEDIT KEYS

The following keys control PCEdit functions:

<b>Enter</b>	Next line; cursor at first char; add line if EOF or insert on
<b>Cur Down</b>	Next text line; cursor column unchanged
<b>Cur Up</b>	Previous text line; cursor column unchanged
<b>PgDn</b>	Display next screen of text
<b>PgUp</b>	Display previous screen of text
<b>Cur Left</b>	Move cursor left one character
<b>Cur Right</b>	Move cursor right one character
<b>Home</b>	First character in current text line
<b>End</b>	One character past last character in current line
<b>Tab</b>	Traverse to next tab stop
<b>Shift-Tab</b>	Traverse to previous tab stop
<b>Insert</b>	Toggle between insert and overwrite modes
<b>Esc</b>	Undo changes to current line
<b>Backspace</b>	Delete character left of cursor; move cursor left
<b>Delete</b>	Delete character at current cursor position
<b>Ctrl-PgDn</b>	Last text line in file
<b>Ctrl-PgUp</b>	First text line in file
<b>Ctrl-End</b>	Delete from current cursor position to end of line
<b>Ctrl-Cur Left</b>	Previous word on text line
<b>Ctrl-Cur Right</b>	Next word on text line
<b>Alt-A</b>	Alter text in file (search and replace)
<b>Alt-B</b>	Block mark
<b>Alt-C</b>	Copy marked block below current line
<b>Alt-D</b>	Delete current line
<b>Alt-E</b>	Erase (delete) marked block
<b>Alt-F</b>	Find first occurrence of search string
<b>Alt-G</b>	Shift text in marked block 1 character left
<b>Alt-H</b>	Shift text in marked block 1 character right
<b>Alt-I</b>	Insert line below current line
<b>Alt-K</b>	Copy marked block and leave block highlighted
<b>Alt-L</b>	Go to specified line number
<b>Alt-M</b>	Move marked block below current line
<b>Alt-N</b>	Find next occurrence of search string in file
<b>Alt-O</b>	Open/redisplay a file for editing
<b>Alt-P</b>	Begin a new paragraph in WP mode
<b>Alt-Q</b>	Quit w/o saving and exit (prompt if text changed)
<b>Alt-R</b>	Recover last changed/deleted line above current line
<b>Alt-S</b>	Display Setup options (through PCSETUP)
<b>Alt-T</b>	Expand tabs in file to spaces



<b>Alt-U</b>	Unmark marked block
<b>Alt-V</b>	Toggle view mode between full- and split-screen
<b>Alt-W</b>	Toggle active split window
<b>Alt-X</b>	Exit current file to DOS, saving any changes
<b>Alt-Y</b>	Clear line marker(s)
<b>Alt-Z</b>	Display PCEDIT On-line help
<b>Alt-1 through 5</b>	Set/Goto line marker 1 to 5
<b>Alt++</b>	Display next file in edited file list
<b>Alt--</b>	Display previous file in edited file list
<b>Ctrl-A</b>	Alter text in marked block (search and replace)
<b>Ctrl-F</b>	Format a paragraph (WP mode only)
<b>Ctrl-H</b>	Delete character left of cursor; move cursor left
<b>Ctrl-I</b>	Insert line above current line
<b>Ctrl-J</b>	Join next line to current line at cursor position
<b>Ctrl-K</b>	Display On-line Help for ASPECT Keycodes
<b>Ctrl-L</b>	Change characters in marked block to lowercase
<b>Ctrl-M</b>	Merge file at current line
<b>Ctrl-S</b>	Split current line at cursor position
<b>Ctrl-U</b>	Change characters in marked block to uppercase
<b>Ctrl-V</b>	Toggle screen size (lines per screen)
<b>Ctrl-W</b>	Write (save) current contents of file to disk
<b>Ctrl-Z</b>	Display On-line Help for ASPECT Language

PCEDIT has 40 built-in macros for use with ASPECT. Press one of the keys below to automatically insert the indicated words in a script file:

<b>F1</b>	PROC - ENDPROC
<b>F2</b>	IF - ENDIF
<b>F3</b>	ELSEIF
<b>F4</b>	ELSE
<b>F5</b>	SWITCH - ENDSWITCH
<b>F6</b>	CASE - ENDCASE
<b>F7</b>	DEFAULT - ENDCASE
<b>F8</b>	WHILE - ENDWHILE
<b>F9</b>	FOR UPTO - ENDFOR
<b>F10</b>	FOR DOWNT0 - ENDFOR
<b>Shift-F1</b>	ATSAY
<b>Shift-F2</b>	FATSAY
<b>Shift-F3</b>	CLEAR
<b>Shift-F4</b>	SCROLL
<b>Shift-F5</b>	BOX
<b>Shift-F6</b>	MESSAGE
<b>Shift-F7</b>	LOCATE
<b>Shift-F8</b>	GETCUR

<b>Shift-F9</b>	<b>CUROFF</b>
<b>Shift-10</b>	<b>CURON</b>
<b>Ctrl-F1</b>	<b>GET</b>
<b>Ctrl-F2</b>	<b>ATGET</b>
<b>Ctrl-F3</b>	<b>MATGET</b>
<b>Ctrl-F4</b>	<b>RGET</b>
<b>Ctrl-F5</b>	<b>STRCPY</b>
<b>Ctrl-F6</b>	<b>STRFMT</b>
<b>Ctrl-F7</b>	<b>STRCAT</b>
<b>Ctrl-F8</b>	<b>STRCMP</b>
<b>Ctrl-F9</b>	<b>SUBSTR</b>
<b>Ctrl-F10</b>	<b>INIT</b>
<b>Alt-F1</b>	<b>PAUSE</b>
<b>Alt-F2</b>	<b>WAITQUIET</b>
<b>Alt-F3</b>	<b>WAITFOR</b>
<b>Alt-F4</b>	<b>WHEN</b>
<b>Alt-F5</b>	<b>CWHEN</b>
<b>Alt-F6</b>	<b>SUSPEND UNTIL</b>
<b>Alt-F7</b>	<b>GETFILE</b>
<b>Alt-F8</b>	<b>SENDFILE</b>
<b>Alt-F9</b>	<b>TRANSMIT</b>
<b>Alt-F10</b>	<b>HANGUP</b>

# B

## Compiler and Run-Time Errors

---

This appendix lists both the possible error messages generated by ASPECT during the execution of a script and the possible warning messages generated by ASPCOMP during a compilation.

Errors that occur while a script is executing are separated into two categories: *non-critical* and *critical errors*. Non-critical errors are those with error numbers less than 100; should one of these occur, you'll be prompted whether or not to abort the currently executing script. If you choose not to abort it, execution will continue. However, unreliable results may occur.

Critical errors are those with error numbers greater than 100. If one of these errors occurs, the script will terminate immediately after the error message is displayed.

If you SET ASPDEBUG ON, a file offset will accompany an error message, which allows you to trace the error to a particular source line when using a symbol map generated with a source line reference table (use the /ML command line switch with ASPCOMP to produce the symbol map file).

### SCRIPT EXECUTION (RUN-TIME) ERRORS

#### Error 1: Value out of range

A value was encountered which was not within the valid range of values accepted for a particular command parameter. For example, a display row value of 25 is out of range when your video mode is 25 X 80 (row values are zero-based). This error message is likely to be the one most often encountered, and does indicate a problem which should probably be corrected. However, range checking can be suppressed by issuing the SET RANGECHK OFF command.

#### Error 2: Divide by zero

A DIV or MOD command (or a / or % operator) attempted to divide a value by zero. ASPECT will make no attempt to perform the operation as this would immediately terminate PROCOMM PLUS.

**Error 3: String length limit exceeded**

An operation which updates or writes to a string variable has attempted to write data past the end of string's data area. The maximum length of any string in ASPECT is 80 characters. This error will usually occur during a STRCAT, STRUPDT, or STRFMT command.

**Error 4: Index refers to unopened file**

A file I/O operation was attempted on a file which was not currently open. Make sure that the FOPEN command is used before any file I/O operations. This message can be suppressed by setting RANGECHK OFF.

**Error 101: Insufficient memory**

There is not enough memory available to run the script file. This will occur when attempting to allocate the data space for a script's global string variables. Try reducing the number of global string variables required in the script, or free up more memory by removing unnecessary TSR programs.

**Error 102: Invalid ASPECT file name**

An invalid file name was specified at the Alt-F5 prompt, or in a Meta Key definition, or with the EXECUTE command. A valid file name consists of up to eight characters optionally followed by a .ASP or .ASX extension. If the file name you specify is valid, but the file does not exist, a "FILE NOT FOUND" message will occur.

**Error 103: Unable to compile ASPECT file**

Either an error occurred when attempting to run the ASPCOMP compiler, or a compile-time error was found in the script file. In the latter case, an error file with a .ERR extension was probably created (which can be viewed from within PROCOMM PLUS using Alt-A or Alt-V). Otherwise, refer to "Problems When Running External Programs" in Appendix C of your User Manual.

**Error 104: Error opening ASPECT file**

The compiled .ASX script file was not found or could not be opened.

**Error 105: Stack overflow in procedure call**

A procedure call requiring passed parameters or a procedure with local variables was called when there was insufficient stack space remaining to continue execution of the script. Usually this occurs if there are procedure calls nested very deeply (as might result in a recursive call) or procedures with large numbers of local string variables.

**Error 106: Invalid command encountered**

A command was encountered which is not recognized among ASPECT's command set. This is a serious condition which indicates a corrupted file or an error within the compiler. First, attempt to recompile the script file and execute it again. If the error still exists, contact Datastorm's Technical Support Forum on CompuServe (GO DATASTORM), or call Technical Support directly.

**Error 107: Unexpected end of file**

An attempt to read the next script command from the compiled script failed. See error 106 for more details.

**Error 108: Stack overflow in string format**

A string format operation (FATSAY, FSTRFMT, or STRFMT) exceeded the maximum length allowed for the output of formatted data.

**Error 109: Invalid LONGJMP encountered**

A LONGJMP command was attempted before the corresponding SETJMP command was performed, or the corresponding SETJMP was used by another procedure called from the current procedure.

**Error 110: Unable to execute remote command**

A remote command was not entirely received or couldn't be compiled and/or executed. See the descriptions for errors 103 and 104.

**Error 111: Unexpected data type encountered**

A data type was not recognized as valid. Contact Datastorm's Technical Support Forum on CompuServe (GO DATASTORM), or call Technical Support directly.

## **COMPILER ERRORS AND WARNING MESSAGES**

Compiler error messages are separated into two categories: those which allow continued compilation (error numbers less than 100), and those which don't (error numbers between 100 and 200). In either case, a .ASX file will not be generated. An *error* message is always accompanied by a source line number, and (where possible) the token which caused the error to occur. Most errors should be easily resolved by checking the description of a command's syntax.

*Warning* messages will not prevent the generation of a .ASX file; they inform you of a potential problem. Warning messages are numbered 200 and greater. The /W command line switch will suppress or control the types of warning messages issued.

**Error 1: Invalid token**

A parameter was specified which was not allowed. A parameter may be the wrong data type, or may not be an acceptable keyword. Check the command's description for the correct syntax.

**Error 2: Unexpected token**

An unnecessary token was specified. Check the command's syntax.

**Error 3: Unexpected command**

ASPECT found a command word not required within the current context of the source code. This can occur with commands that control program flow (ELSE, ENDIF, CASE, ENDWHILE, etc.) or if a command word appears within a numeric expression.

**Error 4: Undefined label**

A label was referenced in a GOTO command, but the label was not defined within the procedure wherein the GOTO command occurred.

**Error 5: Duplicate symbol**

A procedure, label, or variable name has been defined more than once. Select another unique name to correct the problem.

**Error 6: Missing token**

A token was required where none was found. Consult the description of the command for further details.

**Error 7: Missing ENDSWITCH command**

An ENDSWITCH command was expected where none was found.

**Error 8: Missing ENDCASE command**

An ENDCASE command was expected where none was found.

**Error 9: Missing ENDIF command**

An ENDIF command was expected where none was found.

**Error 10: Missing ENDWHILE command**

An ENDWHILE command was expected where none was found.

**Error 11: Missing ENDFOR command**

An ENDFOR command was expected where none was found.

**Error 12: Unexpected colon**

A colon character was found where one was not required. Colons are only used to define labels used in GOTO commands.

**Error 13: Undefined procedure**

A procedure name was referenced within the script file, but the procedure definition was never found.

**Error 14: Missing ENDPROC command**

An ENDPROC command was expected where none was found.

**Error 15: Missing procedure MAIN**

Every ASPECT program must contain a procedure named MAIN which indicates the place where execution of the script should begin.

**Error 16: Missing PROC command**

A PROC command was expected before the command on the indicated source line. Only certain commands may occur outside the body of a procedure.

**Error 17: Variable limit exceeded**

An attempt was made to define more variables than are allowed within a source file. There is a limit of 128 global variables of each data type, and 128 parameters and local variables per each procedure.

**Error 18: Variable not defined**

A variable name was used, but no variable with that name was previously defined. A variable must be defined before it is referenced.

**Error 19: Variable already defined**

An attempt to define a variable was made when the name was already used by another variable. Local variables must have names that are unique from other existing global variables.

**Error 20: Invalid command or expression token**

A token was encountered that was neither a valid ASPECT command, numeric expression operator, value or variable, nor a string variable.

**Error 21: Invalid numeric variable or constant**

A token was encountered that was neither a previously defined numeric variable nor a valid numeric constant of the acceptable data type(s).

**Error 22: Invalid numeric variable**

A token was encountered which does not represent a previously defined numeric variable of the acceptable data type(s).

**Error 23: Invalid string constant (quotes missing)**

A token presumed to represent a string constant was encountered, but the quotes surrounding the string were missing.

**Error 24: Invalid string variable**

A token was encountered which does not represent a previously defined string variable.

**Error 25: Invalid identifier**

An illegal name (used to define a procedure, label, variable or macro) has been encountered. See "Naming Elements in ASPECT" in Chapter 2 of the ASPECT Script Language Reference Manual for the correct naming conventions.

**Error 26: Label used in another procedure**

A label name was encountered which was already being used within another procedure. Label names within a script file must be unique, even though a label can only be referenced from within the procedure wherein it is defined.

**Error 27: Invalid floating point operation**

A floating point value was encountered in an numeric operation which does not accept floating point values. These operations include bit-wise manipulation, shifting, and unary complement.

**Error 28: Invalid use of reserved word**

A procedure, label, variable, or macro name was encountered which is identical to an ASPECT reserved word and therefore cannot be used. See Appendix C for a complete list of reserved words.

**Error 29: Macro already defined**

A macro with the same name was already defined earlier in the script file. To define a macro name more than once, the previous definition of the macro name must be removed using the UNDEF command.

**Error 30: Missing ENDCOMMENT command**

The end of the source file was reached while in a COMMENT block.

**Error 31: Missing \$ENDIF command**

Then end of the source file was reached while within a \$IFDEF command block.

**Error 32: Missing terminating quote**

A terminating quote character is required within a string or character constant.

**Error 33: Line truncated during macro expansion**

A macro name was encountered in a command line and upon replacing the macro name with its defined text, the maximum allowable source line length was exceeded. Split the source line using a backslash character just before the macro name.

**Error 34: Invalid expression token**

A token was encountered within a numeric expression that was neither a valid operator nor a numeric constant or variable.

**Error 35: Missing operator**

In a numeric expression, an operator was expected between two operands, or between an operand and a unary operator.

**Error 36: Missing operand**

In a numeric expression, an operator was being processed without an available operand.

**Error 37: Missing right paren**

In a numeric expression, a right parenthesis was expected to match a corresponding left parenthesis.



**Error 38: Missing left paren**

In a numeric expression, a right parenthesis was encountered without a corresponding left parenthesis.

**Error 39: Missing variable operand**

In a numeric expression, a variable operand was expected between two operators.

**Error 40: Expression too complex**

A numeric expression could not be evaluated due to the large number of nested operators and operands. Break the expression into several smaller sub-expressions.

**Error 41: Missing space between tokens**

A space is required between each token on a command line. This error occurs when a space is missing between a token on either side of a quoted string constant.

**Error 42: Unexpected escape sequence**

An escape character was encountered outside of a string or character constant.

**Error 43: Maximum token length exceeded**

A token was encountered which exceeds the maximum allowable token length of 80 characters.

**Error 44: Invalid variable operand**

In a numeric expression, a variable operand type was required in order to apply a particular operator (usually =, ++, or --).

**Error 45: Invalid pass by reference**

A parameter was encountered in a procedure call which is not a defined variable and therefore cannot be passed by reference. Constants may only be passed by value (no ampersand allowed).

**Error 46: Invalid number of parameters**

A procedure call has been encountered which does not include the correct number of parameters as defined by the procedure being called.

**Error 47: Missing WITH before parameter list**

A procedure call was encountered which includes a parameter list without the required WITH keyword.

**Error 48: Missing comma in token list**

A comma is required to separate a list of tokens which are used to define variables or parameters.

**Error 49: Mismatched parameter type**

A parameter in a procedure call was found to be a different data type than expected by the procedure being called. Make sure your parameters are the same type and in the same exact order as those listed in the procedure's definition.

**Error 50: Escape sequence character out of range**

An escape sequence evaluated to an invalid character value. Escape sequences can only represent character values from 0 to 255.

**Error 51: Invalid character constant**

A character constant represents a character value from 0 to 255, and therefore cannot consist of less or more than one character. Note that valid escape sequence evaluates to a single character value even though the sequence may be defined using more than one character.

**Error 101: Stack overflow (nesting too deep)**

A command which defines a nested command block (such as IF, WHILE, FOR, SWITCH, etc.) is nested too deeply to be evaluated by the compiler; or, an INCLUDE command was nested more than 10 levels deep. The script file or INCLUDE files must be written differently to avoid the nesting problem.

**Error 102: Stack underflow**

An internal stack used by the compiler was found to be in an incorrect state. Please report the problem on DATASTORM's Technical Support Forum on CompuServe (GO DATASTORM), or call Technical Support directly.

**Error 103: Insufficient memory**

There is insufficient memory to compile the script file. First, check that there is at least 128K of memory available, and then attempt to compile the script again. If this fails, the script is too large to be compiled and should probably be split up into smaller files which can then be executed separately with the EXECUTE command. Please report the problem on DATASTORM's Technical Support Forum on CompuServe (GO DATASTORM), or call Technical Support directly.

**Error 104: Invalid command line option**

A command line option was encountered which is not supported by the compiler. Run the compiler without any command line arguments to display the available options.

**Error 105: Invalid script file name**

The script file name supplied is longer than 8 characters or does not have a .ASP extension.

**Error 106: Error opening script file**

The script file name supplied refers to a non-existent file, or a file which cannot be opened successfully.

**Error 107: Error opening output file**

The compiler was unable to open the output file (.ASX extension) for code generation. If the file already exists, make sure that it's not marked read-only.

**Error 108: Missing script filespec**

The script file name must be provided on the command line along with any options. The compiler will not prompt for it.

**Error 109: Error writing to output file**

An error has occurred while generating the output file. Make sure that there is sufficient disk space to create the file. The compiled .ASX output file usually requires less space than the .ASP source file.

**Warning 201: Unreferenced local label**

A label was defined within a procedure, but it was never referenced with a GOTO command.

**Warning 202: Unreferenced parameter**

A procedure defines a parameter which was never used within the procedure's command block.

**Warning 203: Unreferenced local variable**

A procedure defines a local variable which was never used within the procedure's command block.

**Warning 204: Unreferenced global variable**

The script file defined a global variable which was never referenced by the procedures contained in the generated output file.

**Warning 301: Ignoring unreferenced procedure**

The script file contains a procedure which was never called by another procedure within the script file, or was called only by another procedure which was never called. The compiler will not generate code for this procedure thus reducing the output file size and saving disk space.

CONFIDENTIAL - SECURITY INFORMATION

1. [Illegible]

2. [Illegible]

3. [Illegible]

4. [Illegible]

5. [Illegible]

6. [Illegible]

7. [Illegible]

8. [Illegible]

9. [Illegible]

10. [Illegible]

11. [Illegible]

12. [Illegible]

13. [Illegible]

14. [Illegible]

15. [Illegible]

16. [Illegible]

17. [Illegible]

18. [Illegible]




## *Reserved Words*

---

This appendix lists the reserved words set aside in ASPECT for named elements.

For more information on the restrictions concerning reserved words and ASPECT named elements, please refer to Chapter 2 of this manual.

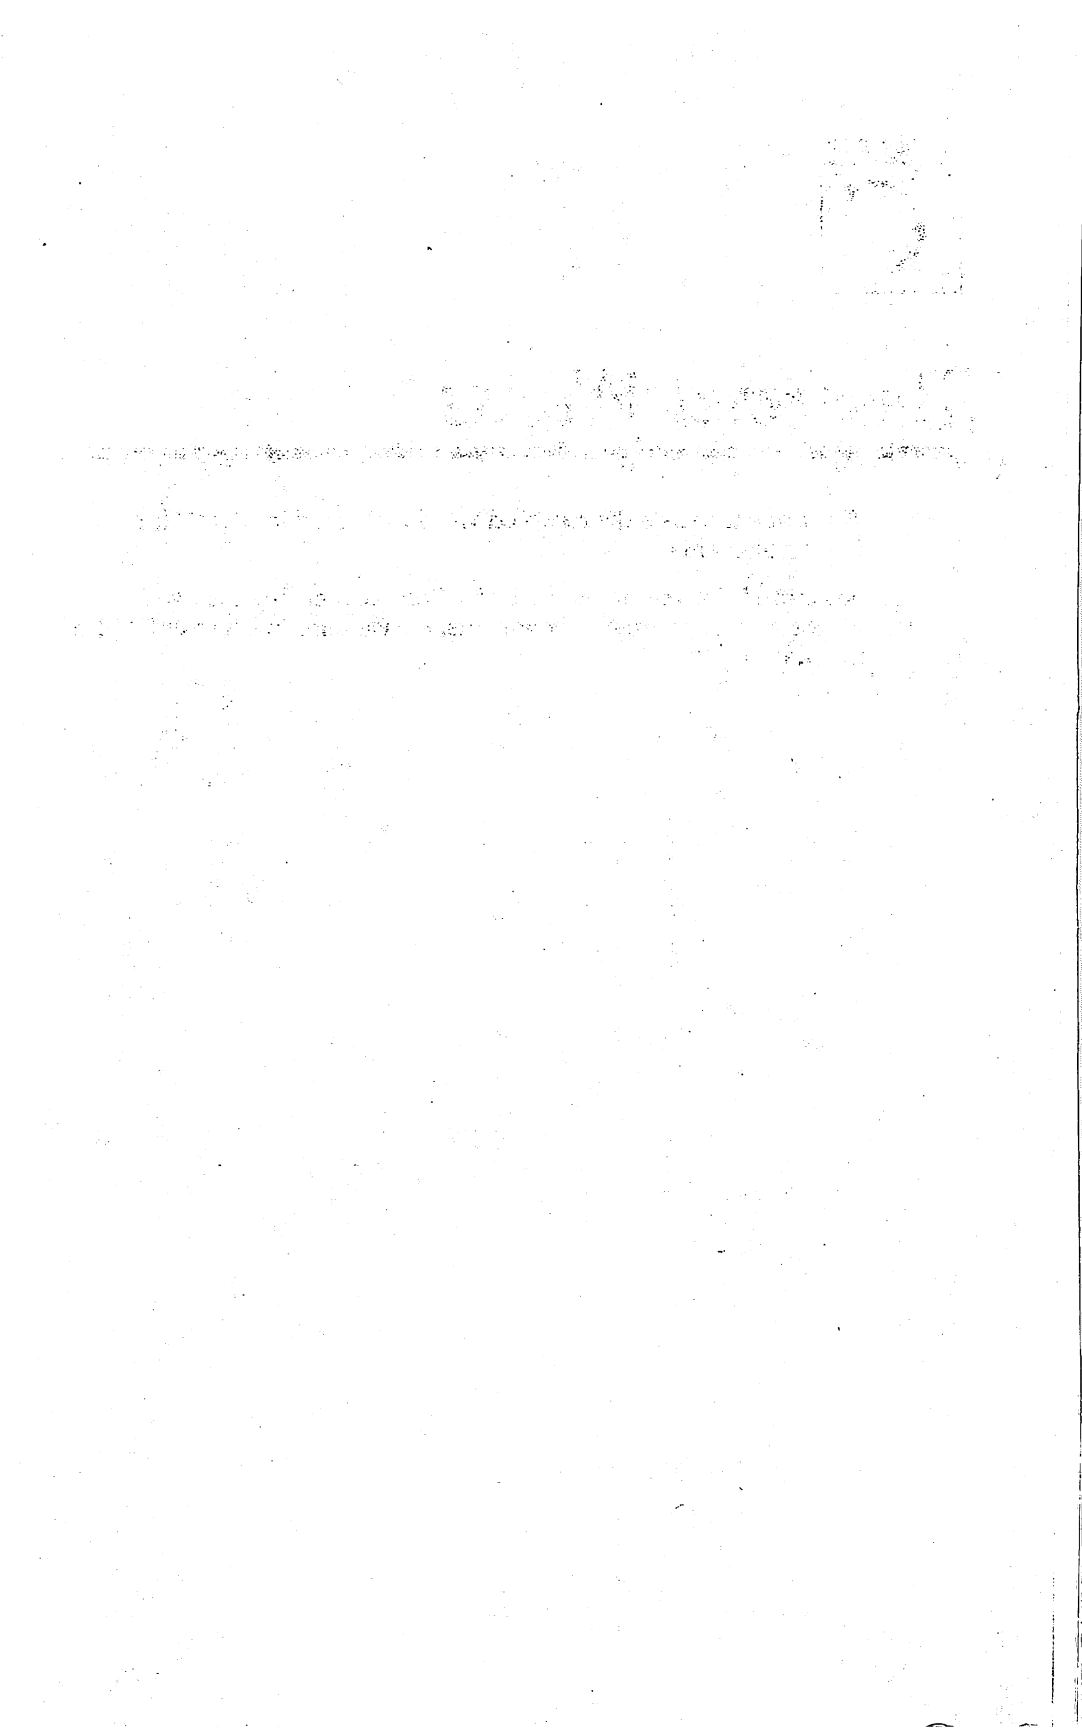

\$COL  
 \$DATE  
 \$D\_BAUD  
 \$D\_DATABIT  
 \$D\_DUPLEX  
 \$D\_ENTRY  
 \$D\_KBDFILE  
 \$D\_LDATE  
 \$D\_METAKEY  
 \$D\_MODE  
 \$D\_NAME  
 \$D\_NOTE  
 \$D\_PARITY  
 \$D\_PHONE  
 \$D\_PORT  
 \$D\_PROTO  
 \$D\_PWORD  
 \$D\_SCRIPT  
 \$D\_STOPBIT  
 \$D\_TERM  
 \$D\_TOTAL  
 \$ELSE  
 \$ELSEIF  
 \$ENDIF  
 \$FATTR  
 \$FDATE  
 \$FEXT  
 \$FILENAME  
 \$FNAME  
 \$FSIZE  
 \$FTIME  
 \$H\_BAUD  
 \$H\_ELAPSED  
 \$H\_LEVEL  
 \$H\_NAME  
 \$H\_OFFLINE  
 \$H\_ONLINE  
 \$IFDEF  
 \$NULL  
 \$ROW  
 \$SCRNCOLS  
 \$SCRNROWS  
 \$TERMBOLD  
 \$TERMDIM  
 \$TERMNORM

\$TERMREV  
 \$TERMULINE  
 \$TIME0  
 \$TIME1  
 1KXMODEM  
 1KXMODEMG  
 25X80  
 2KWINDOW  
 4KWINDOW  
 8QUOTE  
 8STRIP  
 ABORTDL  
 ADD  
 ADDS60  
 ADDS90  
 ADM3  
 ADM31  
 ADM5  
 ALARM  
 AND  
 ANDL  
 ANSI  
 ANSI8BIT  
 ASCII  
 ASK  
 ASPDEBUG  
 ASPECT  
 ASSIGN  
 ATGET  
 ATIME  
 ATOF  
 ATOI  
 ATOL  
 ATSAY  
 ATT4410  
 ATT605  
 AUTOANSOFF  
 AUTOANSON  
 AUTOBAUD  
 AUTODLOAD  
 BACKSPACE  
 BAUD  
 BAUDRATE  
 BINARY  
 BLANKEX

BLANKON  
 BLINKON  
 BLOCK  
 BLOCKCHECK  
 BLOCKCUR  
 BOLDON  
 BOX  
 BREAK  
 BYE  
 CALL  
 CALLOG  
 CALLPAUSE  
 CASE  
 CDHIGHINIT  
 CDINXFER  
 CEIL  
 CHARACTER  
 CHARPACE  
 CHATMODE  
 CHDIR  
 CISB  
 CLEAR  
 CLIPCHAR  
 CLOSE  
 CLOSED  
 CNCT1200  
 CNCT19200  
 CNCT2400  
 CNCT300  
 CNCT38400  
 CNCT4800  
 CNCT9600  
 COM1  
 COM2  
 COM3  
 COM4  
 COM5  
 COM6  
 COM7  
 COM8  
 COMDATA  
 COMGETC  
 COMGETCD  
 COMMENT  
 COMP


COMPUTC	DLXPROTO3	EXTPROTO3
CONNECT	DN_CR	EXTRAX80
CONNECTED	DN_LF	EXTRAXUSER
CONNECTION	DN_TO	FAILURE
CQUOTE	DOS	FASTKBD
CR	DOSMODE	FATSAY
CRC16	DOSVER	FCLEAR
CRC32	DOWNT0	FCLOSE
CR_LF	DROPDTR	FETCH
CTRL	DSCROLL	FFLUSH
CURDN	DUPLEX	FGETC
CURLF	EBOL	FGETS
CUROFF	EBOS	FILETYPE
CURON	ECHO	FIND
CURRT	EDITOR	FINDCASE
CURUP	EEOL	FINDFIRST
CWHEN	EEOS	FINDNEXT
DATABITS	ELSE	FINISH
DATE	ELSEIF	FLOAT
DEC	EMULATE	FLOATPARM
DECIMAL	EMULATION	FLOOR
DEFAULT	ENDCASE	FNLOOKUP
DEFINE	ENDCOMMENT	FOPEN
DELCHAR	ENDFOR	FOR
DELETE	ENDIF	FOREVER
DELLINE	ENDPROC	FOUND
DEST	ENDSWITCH	FPUTC
DGD100	ENDWHILE	FPUTS
DGD200	ENQ	FREAD
DGD210	EOF	FROMDDIR
DIAL	EOLCHAR	FSEEK
DIALCMND	EQ	FSTRFMT
DIAENTRY	ERRDETECT	FTELL
DIALSUFFIX	ERRORMSG	FTOA
DIMON	ESPRIT3	FULL
DIR	EVEN	FWRITE
DIRECT	EXECUTE	GE
DISCONNECT	EXIT	GET
DISKFREE	EXITCDHIGH	GETCUR
DISPLAY	EXITFOR	GETDIR
DIV	EXITSWITCH	GETENV
DLDIR	EXITWHILE	GETFATTR
DLOAD	EXPLODE	GETFDATE
DLXPROTO1	EXTPROTO1	GETFILE
DLXPROTO2	EXTPROTO2	GETFSIZE



GETFTIME	LINEPACE	NEGOTIATE
GETVATTR	LOCATE	NEQ
GETVCHAR	LOG	NEWUSERLVL
GOODBYE	LOGFILE	NO
GOSUB	LOGOUT	NOCLEAR
GOTO	LONG	NOCNCT1
GT	LONGJMP	NOCNCT2
H19	LONGPARK	NOCNCT3
HALF	LOOPFOR	NOCNCT4
HANDSHAKE	LOOPWHILE	NONDEST
HANGUP	LT	NONE
HARDFLOW	LTOA	NORMON
HELP	MARK	NOT
HITKEY	MATGET	NULL
HOME	MAXDIAL	ODD
HOOK	MDIAL	OFF
HOST	MEMFREE	ON
IBM3101	MEMPEEK	OPEN
IBM3161	MEMPOKE	OR
IBM3270	MEMREAD	ORL
IBMPCL	MEMWRITE	OUTPORT
IF	MESSAGE	OVERWRITE
IGNORE	METAKEY	PACECHAR
IMODEM	MGET	PACKSIZE
INC	MKDIR	PADCHAR
INCLUDE	MLOAD	PADNUM
INIT	MOD	PARITY
INPORT	MODEM	PARMREST
INSCHAR	MODEM7	PARMSAVE
INLINE	MONO	PAUSE
INSMODE	MOUSEX	PAUSECHAR
INTEGER	MOUSEY	PORT
INTPARM	MSPAUSE	PRINTER
ISFILE	MUL	PROC
ITOA	N0	PROGRAM
KEEP	N1	PROTECT
KERMIT	N2	PROTOCOL
KERMSSERVE	N3	PRTNAME
KEY2ASCII	N4	PULLDNKEY
KEYGET	N5	PULLDNMENU
KEYS	N6	PUSHBACK
KFLUSH	N7	PUTENV
LE	N8	PUTVATTR
LF	N9	PUTVCHAR
LINEFEED	NEG	QUIT

RANGECHK	SHELLBOOT	TERMWIDTH
RASCII	SHL	TERMWRT
RCA	SHR	TEXT
RDFLUSH	SNAPSHOT	TIME
RDWRITE	SNOW	TIMEOUT
RECVCRASH	SOFTFLOW	TIMESTAMP
RECYCLE	SOUND	TRANSLATE
REDIAL	SPACE	TRANSMIT
REDISPLAY	STARTCHAR	TTY
REG	STATLINE	TV910
RELAXED	STATMSG	TV912
REMOTECMD	STATREST	TV920
RENAME	STOPBITS	TV922
RESUME	STRCAT	TV925
RETURN	STRCMP	TV950
REVON	STRCPY	TV955
REWIND	STREAMING	TXMETHOD
RFLUSH	STRFMT	TXPACE
RGET	STRING	TYPE
RMDIR	STRIP	ULDIR
RSTRCMP	STRLN	ULINEFONT
RUN	STRLWR	ULXPROTO1
RXDATA	STRPARM	ULXPROTO2
S0	STRPEEK	ULXPROTO3
S1	STRPOKE	UNDEF
S2	STRSET	UNTIL
S3	STRUPDT	UPTO
S4	STRUPR	UP_CR
S5	SUB	UP_LF
S6	SUBSTR	ULINEON
S7	SUCCESS	USERMODE
S8	SUSPEND	USERMSG
S9	SWITCH	USERVID
SCREEN	SWITCHCASE	VGALINES
SCROLL	SYSTYPE	VIDREST
SEALINK	TABEX	VIDSAVE
SENDCR	TELINK	VIDSTART
SENDCRASH	TERMBOLD	VIEWUTIL
SENDFILE	TERMDIM	VT100
SET	TERMINAL	VT102
SETFATTR	TERMKEY	VT220
SETFDATE	TERMNORM	VT320
SETFTIME	TERMRESET	VT52
SETJMP	TERMREV	WAIT
SHELL	TERMULINE	WAITCASE

WAITCNCT  
WAITFOR  
WAITQUIET  
WHEN  
WHENCASE  
WHILE  
WITH  
WRAP  
WRITEC  
WRITEPROT  
WXMODEM  
WYSE100  
WYSE50  
WYSE75  
XFERKEY  
XMODEM  
XOR  
YES  
YMODEM  
YMODEMG  
ZERO  
ZMODEM

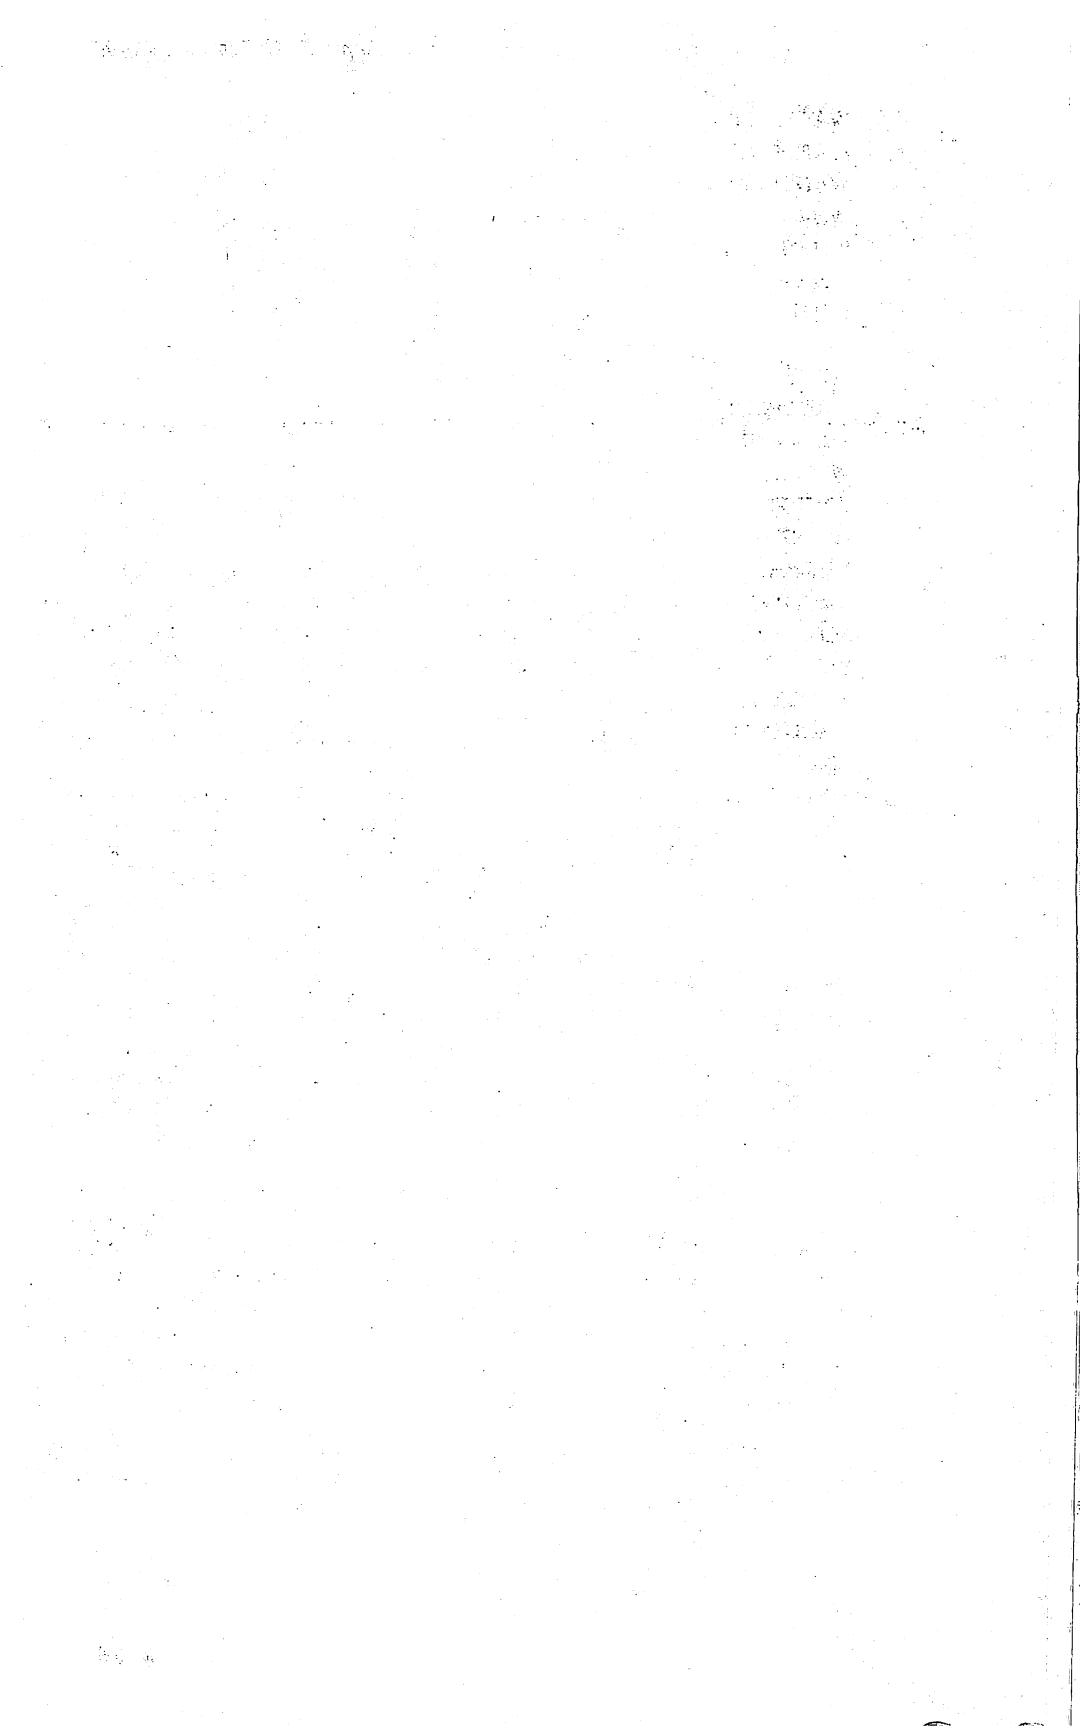



# Operators

---

This appendix provides technical details concerning the use of operators in ASPECT.

Several operators may be used in mathematical expressions in the ASPECT programming language. Each operator has a precedence level and associativity, and most operators have an equivalent command form (except for the parens, compound assignment operators and comma operator).

*Precedence* defines order of operator evaluation in the absence of parentheses. Operators of higher precedence are evaluated before those with lower precedence. Parentheses are used to override the default precedence. For example, the expression  $A + B * C$  would be evaluated by multiplying B and C together and then adding A because  $*$  has a higher precedence level than  $+$ . The expression  $(A + B) * C$ , however, would first evaluate  $A + B$ , and then would multiply the result by C.

*Associativity* determines the order of evaluation when examining two operators with equal precedence (note: all operators having the same precedence level always have the same associativity.) Left to right associativity means that an operand is grouped with the operator on its left, whereas right to left associativity means that an operand is grouped with the operator on its right. For example, the expression  $A * B / C$  would be evaluated by multiplying A and B, and then dividing that result by C. Operand B groups with  $*$  rather than  $/$  because  $*$  and  $/$  are left to right associative. The expression  $A = B = C$ , however, is evaluated by assigning the value of C to B and then to A. B is assigned a value before A because  $=$  is right to left associative.

Two special unary operators,  $++$  and  $--$ , may be applied to either side of an operand. In either case the effect is to increment or decrement the operand. However, when the operator is applied to the right side of an operand, the value of the operand is used in the context of the expression before it is incremented or decremented. When applied to the left side of an operand, the value is used in an expression is the result after the operand is incremented or decremented. For example, in the expression  $A + B--$ , A is added to B, and then B is decremented. In the expression  $A + --B$ , first B is decremented, and then it is added to A.

The compound assignment operators can both transform and assign values in a single step. For example, the expression  $A += B$  is equivalent to the expression  $A = A + B$ .

Except for the left and right parens and the unary operators, all operators listed here are binary and act upon two operands.

### ASPECT OPERATOR TABLE

Operator	Type	Precedence	Associativity	Command
(	GROUP	13	Left to Right	—
)	GROUP	13	Left to Right	—
!	UNARY	12	Right to Left	NOT
-	UNARY	12	Right to Left	NEG
~	UNARY	12	Right to Left	COMP
++	UNARY	12	Right to Left	INC
--	UNARY	12	Right to Left	DEC
*	BINARY	11	Left to Right	MUL
/	BINARY	11	Left to Right	DIV
%	BINARY	11	Left to Right	MOD
+	BINARY	10	Left to Right	ADD
-	BINARY	10	Left to Right	SUB
>>	SHIFT	9	Left to Right	SHR
<<	SHIFT	9	Left to Right	SHL
<=	RELATE	8	Left to Right	LE
>=	RELATE	8	Left to Right	GE
<	RELATE	8	Left to Right	LT
>	RELATE	8	Left to Right	GT
==	RELATE	7	Left to Right	EQ
!=	RELATE	7	Left to Right	NEQ
&	BITWISE	6	Left to Right	AND
^	BITWISE	5	Left to Right	XOR
	BITWISE	4	Left to Right	OR
&&	LOGICAL	3	Left to Right	ANDL
	LOGICAL	2	Left to Right	ORL
=	ASSIGN	1	Right to Left	INIT
*=	ASSIGN	1	Right to Left	—
/=	ASSIGN	1	Right to Left	—
%=	ASSIGN	1	Right to Left	—
+=	ASSIGN	1	Right to Left	—
-=	ASSIGN	1	Right to Left	—
<<=	ASSIGN	1	Right to Left	—
>>=	ASSIGN	1	Right to Left	—
&=	ASSIGN	1	Right to Left	—
=	ASSIGN	1	Right to Left	—
^=	ASSIGN	1	Right to Left	—
,	COMMA	0	Left to Right	—

# Index

---

- \$ symbol 213
  - \$COL system variable 190
  - \$D\_BAUD system variable 193
  - \$D\_DATABIT system variable 193
  - \$D\_DUPLEX system variable 193
  - \$D\_ENTRY system variable 193
  - \$D\_KBDFILE system variable 193
  - \$D\_LDATE system variable 193
  - \$D\_METAKEY system variable 193
  - \$D\_MODE system variable 193
  - \$D\_NAME system variable 193
  - \$D\_NOTE system variable 193
  - \$D\_PARITY system variable 193
  - \$D\_PHONE system variable 193
  - \$D\_PORT system variable 193
  - \$D\_PROTO system variable 193
  - \$D\_PWORD system variable 193
  - \$D\_SCRIPT system variable 193
  - \$D\_STOPBIT system variable 193
  - \$D\_TERM system variable 194
  - \$D\_TOTAL system variable 194
  - \$DATE system variable 190
  - \$ELSE script command 63
  - \$ELSEIF script command 64, 66
    - use with macros 53
  - \$FATTR system variable 190
  - \$FDATE system variable 190
  - \$FEXT system variable 190
  - \$FILENAME system variable 190
  - \$FNAME system variable 190
  - \$FSIZE system variable 191
  - \$FTIME system variable 191
  - \$H\_BAUD system variable 194
  - \$H\_ELAPSED system variable 194
  - \$H\_LEVEL system variable 194
  - \$H\_OFFLINE system variable 194
  - \$H\_ONLINE system variable 194
  - \$IFDEF script command 106
    - use with macros 53
  - \$NULL system variable 191, 211
  - \$ROW system variable 191
  - \$SCRNROWS system variable 191
  - \$TERMBOLD system variable 191
  - \$TERMDIM system variable 191
  - \$TERMNORM system variable 191
  - \$TERMREV system variable 191
  - \$TERMULINE system variable 191
  - \$TIME0 system variable 191
  - \$TIME1 system variable 191
  - .ASP files 14
  - .ASX files 14
  - /C converter option 198
  - /Dx[=text] compiler option 14, 54
  - /En compiler option 15
  - /En converter option 198
  - /M[L] compiler option 15, 197
  - /T converter option 199
  - /Wn compiler option 15
  - \ extension sign 25
- A**
- ADD script command 10, 35
  - ALARM script command 8, 36
  - AND script command 10, 36, 213
  - ANDL script command 10, 37
  - Arithmetic commands, in script file 10
  - ASPCOMP
    - /D option 14
    - /E option 15
    - /M option 15, 197

- /W option 15
  - error messages 233
  - exit code 197
  - introduction 14
  - switches 217
  - technical description 197
- ASPECT
  - reserved words 243
- ASPECT Script Executable 14
- ASPECT Source Program 14
- ASSIGN script command 4, 37, 168
- ATGET script command 5, 38
- ATOF script command 10, 39
- ATOI script command 10, 39
- ATOL script command 10, 40
- ATSAY script command 5, 41
- Attributes 94
  - convention 30
- (B)**
- BLANKON script command 12, 41
- BLINKON script command 41
- BOLDON script command 12, 42
- BOX script command 8, 42
- Branching, in script file 3
- BREAK script command 7, 43
  - sending in script file 43
- Buffer
  - clearing input 140
  - pushing data 135
  - video 183, 184
  - writing in script file 78
- BYE script command 3, 43
- (C)**
- CALL script command 3, 44
- CASE script command 45
- CEIL script command 10, 45
- Character
  - use in script files 98
- Character constants 29
- Characters
  - displaying on screen 180
  - sending to the remote system 181
- CHDIR script command 9, 46
- CLEAR script command 8, 46
- Clearing keystrokes 112
- Closing a file 76
- Color attributes 31
- Colors, screen colors
  - resetting, in script file 46
- Column
  - convention 31
- COMDATA system variable 192
- COMGETC script command 5, 47
- COMGETCD script command 5, 47
- Command parameters, in script file 24
- COMMAND.COM file 163
- Commands
  - PCEDIT 229
- COMMENT script command 13, 48
- COMP script command 11, 48
- Compiling scripts 14
  - general efficiency rules 203
  - remote commands
    - script example 220
  - strings
    - script example 220
- COMPUTC script command 5, 49
- Conditional compilation 53
- CONNECT script command 7, 49
- CONNECTED system variable 192
- Connecting to a remote system
  - common ASPECT questions 215
- Conventions 30
- Conversion commands, in script file 10
- CONVERT
  - /C option 198
  - /En option 198
  - /T option 199
- Converting strings to lower-case 170
- Converting strings to upper-case 173
- CURDN script command 12, 49
- CURLF script command 13, 50
- CUROFF script command 8, 50
- CURON script command 8, 50
- CURRT script command 13, 50
- Cursor
  - deleting character 55
  - deleting line 55
  - internal 189
  - moving down one line 49
  - moving to the left 50
  - moving to the right 50
  - moving up one line 51
  - positioning 38



Cursor position in script file 93  
 Cursor positioning 114  
 Cursor, turning off, in script file 50  
 Cursor, turning on, in script file 50  
 CURUP script command 13, 51  
 CWHEN script command 3, 51, 187, 188

**[D]**

Date  
   setting file date stamp 161  
 DATE script command 12, 52  
 Debugging  
   common ASPECT questions 217  
 DEC script command 11, 52  
 Decimal  
   setting precision 149  
 Decrementing numeric variable, in script file 52  
 DEFAULT script command 52  
 DEFINE script command 3, 53, 134  
 DELCHAR script command 13, 55  
 DELETE script command 9, 54  
 DELLINE script command 13, 55  
 DIAL script command 7, 55  
 DIAENTRY script command 192  
 Dialing directory  
   switching in script file 58  
 Dialing queue 138  
 Dialing, specified number, in script file 120  
 DIMON script command 13, 56  
 DIR script command 9, 57  
 Directory  
   changing, in script file 46  
   creating a directory from a script file 126  
   reading in a script 93  
 Directory and File Control commands, in script file 9  
 DISKFREE script command 9, 57  
 Display and sound commands in script file 8  
 Displaying variable on screen 71  
 DIV script command 11, 58  
 Division  
   dividing numbers 58  
   returning the modulus 127  
 DLOAD script command 7  
 DOS

  common ASPECT questions 216  
 DOS commands  
   executing in script file 59  
 DOS script command 59, 216  
 DOSVER script command 12, 60  
 Downloading a file in a script 96  
 DSCROLL script command 8, 61

**[E]**

**[Esc]** 16  
 EBOL script command 13, 61  
 EBOS script command 13, 62  
 EEOL script command 13, 62  
 EEOS script command 13, 62  
 ELSE script command 63  
 ELSEIF script command 64  
 EMULATE script command 7, 64  
 End-of-file 67  
 ENDCASE script command 65  
 ENDCOMMENT script command 13, 65  
 ENDFOR script command 3, 66  
 ENDIF script command 3, 66  
 ENDPROC script command 4, 66  
 ENDSWITCH script command 67  
 ENDWHILE script command 4, 67  
 Environment variable  
   SET PCPLUS 58, 113  
 Environment variables  
   control in a script file 135  
   loading in a script file 94  
 EOF script command 5, 67, 214  
 EQ script command 11, 68  
 Error messages  
   ASPCOMP 233  
   run-time 233  
 ERRORMSG script command 68  
 Errors  
   displaying in script file 68  
 Escape sequences 28  
 Examples 34  
 EXECUTE script command 69  
 EXIT script command 70  
 EXITFOR script command 71  
 EXITSWITCH script command 71  
 EXITWHILE script command 71, 188

**[F]**

FAILURE system variable 192  
FATSAY script command 5, 71  
FCLEAR script command 6, 75  
FCLOSE script command 6, 76  
FETCH script command 7, 76  
FFLUSH script command 6, 78  
FGETC script command 6, 78  
FGETS script command 6, 79

**File**

- attributes 161
- checking existence 110
- common ASPECT questions 213
- date 95, 161
- opening in script file 85
- time 162
- writing to a file 91
- writing to output file 87

**File I/O**

- script example 221

**File logging**

- in script file 115

**File pointer**

- repositioning in script file 88
- returning current position in script file 90

**File size 97**

**Files**

- displaying list in script file 57

**Filespec**

- convention 32

**FIND script command 4, 79**

**FINDFIRST script command 9, 81**

**Finding files in script file 81, 82**

**FINDNEXT script command 9, 82**

**Float**

- convention 32
- converting to string 90
- global and local variables 83
- parameter variable 84
- precision 149

**FLOAT script command 83, 134**

**FLOATPARAM script command 84**

**Floatvar**

- convention 32

**FLOOR script command 11, 85**

**FOPEN script command 6, 85**

**FOR script command 3, 86**

**FOREVER option 188, 192**

**Format string**

- data types 74

- definition 72

- precision 74

**FOUND system variable 192**

**FPUTC script command 6**

**FPUTS script command 6, 87**

**FREAD script command 6, 88**

**FROMDIR system variable 192**

**FSEEK script command 6, 88, 213, 214**

**FSTRFMT script command 6, 89**

**FTELL script command 6, 90**

**FTOA script command 10, 90**

**FWRITE script command 6, 91**

**[G]**

**GE script command 11, 91**

**GET script command 6, 92**

**GETCUR script command 8, 93**

**GETDIR script command 9, 93**

**GETENV script command 12, 94**

**GETFATTR script command 9, 94**

**GETFDATE script command 9, 95**

**GETFILE script command 7, 96, 217**

**GETFSIZE script command 9, 97**

**GETFTIME script command 9, 98**

**Gets system date, in script file 52**

**GETVATTR script command 8, 98**

**GETVCHAR script command 8, 98**

**Global variable 28**

- float 83

- integer 109

- long 116

- string 169

**Global variables 211**

**GOSUB script command 3, 99**

**GOTO script command 3, 99**

**Greater than or equal relational testing 91**

**Greater than relational testing 11, 100**

**[H]**

**HANGUP script command 7, 101**

**Help facility in script file 7, 101**

**HITKEY system variable 192**

**HOME script command 13, 101**

**HOOK script command 12, 102**

**Host**

- external processing

script example 221  
HOST script command 7, 102, 194

**I**

IF EOF statement 214  
IF script command 3, 103  
INC script command 11, 106  
INCLUDE script command 13, 106, 134  
Incrementing, in script file 106  
Index  
    convention 32  
INIT script command 11, 107  
INPORT script command 6, 108  
Input/Output, in script file 5  
INCHAR script command 13, 108  
INLINE script command 13, 108  
Integer  
    convention 32  
    converting to string 110  
    global and local variables 109  
    Parameter variable 109  
INTEGER script command 109, 134  
INTPARM script command 109  
Intvar  
    convention 32  
ISFILE script command 9, 110  
ITOA script command 10, 110

**J**

Jump  
    using SETJMP and LONGJMP 116, 162  
KERMSERVE script command 7, 111  
KEY2ASCII script command 10, 111  
Keyboard map  
    loading in a script 113  
KEYGET script command 6, 112  
Keystrokes  
    processing in a script 179  
KFLUSH script command 6, 112  
KLOAD script command 7

**L**

Length  
    convention 32  
Less than or equal relational testing 113  
Less than relational testing 118

Line Reference Table 198  
Line Settings  
    changing 146  
LINEFEED script command 13, 114  
Local variable 28, 211  
LOCATE script command 9, 114  
LOG script command 8  
Long  
    convention 33  
    converting to string 119  
    global and local variables 116  
    Parameter variable 117  
LONG script command 116, 134  
LONGJMP script command 3  
LONGPARM script command 117  
LONGVAR  
    convention 33  
LOOPFOR script command 118  
LOOPWHILE script command 118, 188  
Lowercase conversion 170  
LTOA script command 10, 119

**M**

Macros  
    creating with the DEFINE command 53  
    defining during compilation with /D 54  
    redefining 54  
    redefining with the UNDEF command 183  
    using \$IFDEF and \$ELSEIF 53  
Manual dial 120  
MATGET script command 6, 119  
Math commands, in script file 10  
MDIAL script command 8, 120  
MEMFREE script command 12, 121  
Memory 143  
    measuring free RAM 121  
    reading a specific address 121, 122  
    setting a specific address 122, 123  
Memory manipulation commands, in script file 12  
MEMPEEK script command 121  
MEMPOKE script command 122  
MEMREAD script command 122  
MEMWRITE script command 123  
Merging ASPECT source files in script files 106

**Message**

displaying in script file 166, 183

MESSAGE script command 6, 123

**Meta keys**

loading, in script file 126

Meta keys in script files 35

METAKEY script command 8, 124

MGET script command 6, 125

MKDIR script command 9, 126

MLOAD script command 8, 126

MOD script command 11, 127

MONO system variable 192

MSPAUSE script command 4, 127

MUL script command 11, 128

Multiplying numbers 128

**(N)**

**Name**

convention 33

Named elements 24

conventions 24

NEG script command 11, 128

NEQ script command 11, 129

NORMON script command 13, 129

NOT script command 11, 129

NULL script command 130

**Numeric string**

converting to float variable 39

converting to integer 39

converting to long variable 40

**Numeric variable**

initializing, in script file 107, 212

predefined 26

**Numvar**

convention 33

**Nx**

convention 33

**(O)**

**Offset**

convention 33

**Operands**

definition 26

**Operators**

definition 26

technical details 251

OR script command 11, 130

ORL script command 11, 131

OUTPORT script command 6, 131

Output File Summary 198

**(P)**

**Parameter variable**

float 84

integer 109

long 117

string 171

**Parameters**

restoring from PCPLUS.PRM 132

saving to PCPLUS.PRM 132

PARMREST script command 8, 132

PARMSAVE script command 8, 132

Passing parameters 212

PAUSE script command 4, 132

**Pausing**

waiting for inactivity 186

Pausing a script file 132, 175, 185

Pausing execution 127

PCEDIT commands 229

PCPLUS.PRM

restoring 132

saving 132

PCPLUS.SCR file 165

PEEK 121, 171

POKE 122, 172

**Port**

convention 33

**Ports**

reading data in script file 108

writing data in script file 131

**Precision**

in format strings 74

setting decimal 149

PRINTER script command 8, 133

PROC script command 4, 134

Procedures 134

**Program**

running external programs in a script

142

Program control, in script file 3

**Protocol**

convention 33

PUSHBACK script command 7, 135

PUTENV script command 12, 135

PUTVATTR script command 9, 136

PUTVCHAR script command 9, 136

## Q

QUIT script command 4, 136

Quotation mark, in script-file command 27

## R

RCA script command 13, 137

RDFLUSH script command 7

RDWRITE script command 7, 137

Reading character from input file in script file 78

Reading keystrokes 111, 112

Reading string from input file in script file 79

Receive data buffer  
clearing 140

REDIAL script command 8, 138

Remote commands 34  
script example 220

Removing directories 141

RENAME script command 10, 138

Repositioning a file pointer 88

Reserved words 243

RETURN script command 139

REVON script command 13, 139

REWIND script command 7, 139, 213

RFLUSH script command 7, 140

RGET script command 7, 140

RMDIR script command 10, 141

Row

convention 33

RSTRCMP script command 4, 142

RUN script command 12, 142, 216

## S

Screen

changing attributes 136  
clearing, in script file 46  
color attributes 30  
common ASPECT questions 214  
displaying characters 136  
displaying text 123  
displaying variables or strings 41  
restoring video buffer 183  
saving video buffer 184

scrolling 61

scrolling, in script file 144

snapshots in script file 165

typing a file 182

Screen attributes

use in script files 98

Screen colors

resetting, in script file 46

Script command see also individual  
command listings

Script file

activating Help facility 101

addition 35

assigning strings 37, 168

attributes 94

branching 3, 44, 99, 139

buffer

pushing data back into the buffer  
135

changing directory in 46

changing line settings 146

changing Setup specifications 146

checking existence of file 110

clearing file EOF and error flags 75

clearing keyboard buffer 112

clearing previous WHEN command 51

clearing receive data buffer 140

clearing screen in 46

closing a file 76

comparing string contents 142

concatenating strings in 167

conditional compilation 63, 64, 66, 106  
conditional processing 45, 52, 63-67, 71,  
79, 86, 103, 118, 167, 172, 175, 187,  
188

conversion commands 10

converting floats to strings 90

converting integers to strings 110

converting longs to strings 119

converting numeric strings to float  
variables 39

converting numeric strings to integers  
39

converting numeric strings to long  
variables 40

creating a directory 126

creating formatted string in 169

current directory 93

cursor position 93

- date and time commands 12
- decrementing numeric variable in 52
- defining float global and local variables 83
- defining float parameters 84
- defining integer global and local variables 109
- defining integer parameters 109
- defining long global and local variables 116
- defining long parameters 117
- defining macros 53
- defining string global and local variables 169
- defining string parameters 171
- deleting a file 54
- determining DOS version 60
- dialing in 55
- dialing specified number, in script file 120
- display and sound commands 8
- displaying and acting on converted values 189
- displaying box on screen in 42
- displaying characters 180
- displaying error messages 68
- displaying list of files 57
- displaying status line 167
- displaying status messages 166
- displaying string variable or string on screen 41
- displaying text on screen 123
- displaying user messages 183
- displaying variable on screen 71
- dividing numbers 58
- downloading a file 96
- environment variables 94, 135
- executing another script 69
- executing DOS commands 59
- exiting 49
- extracting strings 174
- FETCHing a SET value 76
- file
  - setting attributes 161
  - setting date 161
  - setting time 162
- file logging in 115
- finding files on disk 81, 82
- generating sounds 166
- getting string value from screen 38
- getting system date in 52
- getting text from screen 92, 119, 125
- hanging up 101
- hooking external programs 102
- I/O
  - writing port data 131
- incrementing in 106
- initializing numeric variable in 107
- input/output 5
- issuing Kermit server commands 111
- loading Meta key sets 126
- loading the current time 180
- math commands 10
- memory
  - measuring free RAM 121
- memory manipulation commands 12
- merging ASPECT source files 106
- moving cursor 49, 50, 51
- multiplying numbers 128
- opening files 85
- pausing 132, 175, 185
- pausing execution 127
- pausing for inactivity 186
- PCPLUS.PRM
  - restoring default parmameters 132
  - saving default parmameters 132
- positioning cursor 38, 114
- printer
  - controlling from a script 133
- procedure
  - marking the beginning 134
- processing terminal keystrokes 179
- program control 3
- reading a specific memory address 121, 122
- reading an ASCII character value in a string 171
- reading character from input file 78
- reading data from a file 88
- reading date stamp 95
- reading free disk space 57
- reading I/O port data 108
- reading keystrokes 111, 112
- reading screen attributes 98
- reading screen characters 98
- reading string from input file 79
- reading the size of a file 97
- reading time stamp 98

- receive data buffer 47
- receiving text strings 140
- relational testing (greater than or equal) 91
- relational testing (greater than) 100
- relational testing (less than or equal) 113
- relational testing (less than) 118
- removing directories 141
- removing macro definitions 182
- renaming files 138, 139
- repositioning a file pointer 88
- restoring the video buffer 183
- returning current file pointer position 90
- returning the modulus 127
- returning to Terminal mode 178
- running external programs 142
- saving the video buffer 184
- screen
  - changing attributes 136
  - displaying characters 136
  - snapshot 165
- scrolling screen 61, 144
- sending break in 43
- sending characters to a remote system 181
- sending remote commands 35
- SETJMP processing 116, 162
- setting a specific memory address 122, 123
- setting a string variable 172
- SHELLing to DOS 163
- sounding an alarm 36
- starting Host mode 102
- string manipulation 4
- string variables
  - testing for null 130
- subtracting 173
- switching terminal emulations 64
- syntax 24
- system commands 12
- Terminal emulation commands 12
- terminal key equivalents 7
- terminating 16, 43, 70
- terminating execution and PROCOMM PLUS 136
- testing for end-of-file 67
- testing for equality 68
- testing for non-equality 129
- turning off cursor 50
- Turning on cursor in 50
- typing a file 182
- uploading a file 145
- using Meta keys 124
- writing character to output file 87
- writing data to a file 91
- writing formatted strings to an output file 89
- writing I/O buffer 78
- writing string to a file 87
- Script file command, executing by remote host 35
- Script file, directory and file control commands 9
- SCROLL script command 9, 144
- Segment
  - convention 34
- Semicolon 24
- SENDFILE script command 8, 145, 217
- SET script command 8, 146
  - FETCHing a SET value 76
- SETFATTR script command 10, 161
- SETFDATE script command 10, 161
- SETFTIME script command 10, 162
- SETJMP script command 3, 116, 162
- Setup facility
  - changing specifications 146
- SHELL script command 12, 163, 216
- SHL script command 11, 164
- SHR script command 11, 165
- SNAPSHOT script command 8, 165
- SOUND script command 9, 166
- STATMSG script command 166
- STATREST script command 167
- Status line
  - redisplaying 167
- STRCAT script command 4, 167
- STRCMP script command 4, 167, 211
- STRCPY script command 5, 168
- STRFMT script command 5, 169
- Strindex
  - convention 34
- String
  - assigning in script file 168
  - comparing contents 142
  - concatenating, in script file 167
  - convention 34

- converting to lower-case 170
- converting to upper-case 173
- extracting a string 174
- formatted, creating in script file 169
- getting from screen 119
- getting the length of a string 170
- global and local variables 169
- Parameter variable 171
- reading an ASCII character value 171
- reading block from input file 88
- setting a specific character 172
- setting a string variable 172
- text, getting, in script file 92
- writing to a file 89
- writing to a file in script file 87
- STRING script command 134, 169
- String, text, getting from screen, in script file 125
- String, text, receiving, in script file 140
- String variables
  - predefined 26
- Strings
  - changing a single character 211
  - comparing 211
  - inputting from screen 38
- Stringvar
  - convention 34
- STRLEN script command 5, 170
- STRLWR script command 5, 170
- STRPARM script command 171
- STRPEEK script command 5, 171
- STRPOKE script command 5, 172
- STRSET script command 172
- STRUPDT script command 5, 172
- STRUPR script command 5, 173
- SUBSTR script command 5, 174
- Subtraction in script file 173
- SUCCESS system variable 192
- SUSPEND UNTIL script command 4, 175
- SWITCH script command 4, 175
- Sx
  - convention 34
- Syntax
  - conventions 30
- Syntax, in script file 24
- System, date and time commands, in script file 12
- System variables
  - definition 26

## T

- Terminal
  - convention 34
  - resetting 180
- Terminal emulation
  - switching in script file 64
- Terminal emulation commands, in script file 12
- Terminal Key Equivalents, in script file 7
- Terminal mode
  - returning from a script 178
- TERMINAL script command 4, 178
- Terminating
  - script file 16, 43, 70
  - terminating script files and PROCOMM PLUS 136
- TERMKEY script command 8, 179
- TERMRESET script command 13, 180
- TERMWRT script command 7, 180
- Time
  - loading in a script 180
  - setting file time stamp 162
- TIME script command 12, 180
- Time stamp
  - use in script files 98
- Transferring files
  - common ASPECT questions 217
- TRANSMIT script command 7, 181
- TYPE script command 9, 182

## U

- ULINEON script command 13, 182
- UNDEF script command 54, 134, 182
- Uploading a file 145
- Upper-case 173
- User-defined constants 27
- User-defined variables 27
- USERMSG script command 183

## V

- Variables
  - common ASPECT questions 211
  - integer 212
  - passing parameters 212
  - system 26



VIDREST script command 9, 183, 214  
VIDSAVE script command 9, 184, 214

**(W)**

WAITFOR script command 4, 185  
WAITFOR system variable 192  
WAITQUIET script command 4, 186  
WHEN command  
    clearing 51  
WHEN script command 4, 187  
WHILE script command 4, 188  
WRITEC script command 7, 189  
Writing I/O buffer in script file 78

**(X)**

XOR script command 11, 189

**(Z)**

ZERO script command 12, 190


## NOTES

## NOTES

## NOTES

## ***NOTES***

## **NOTES**

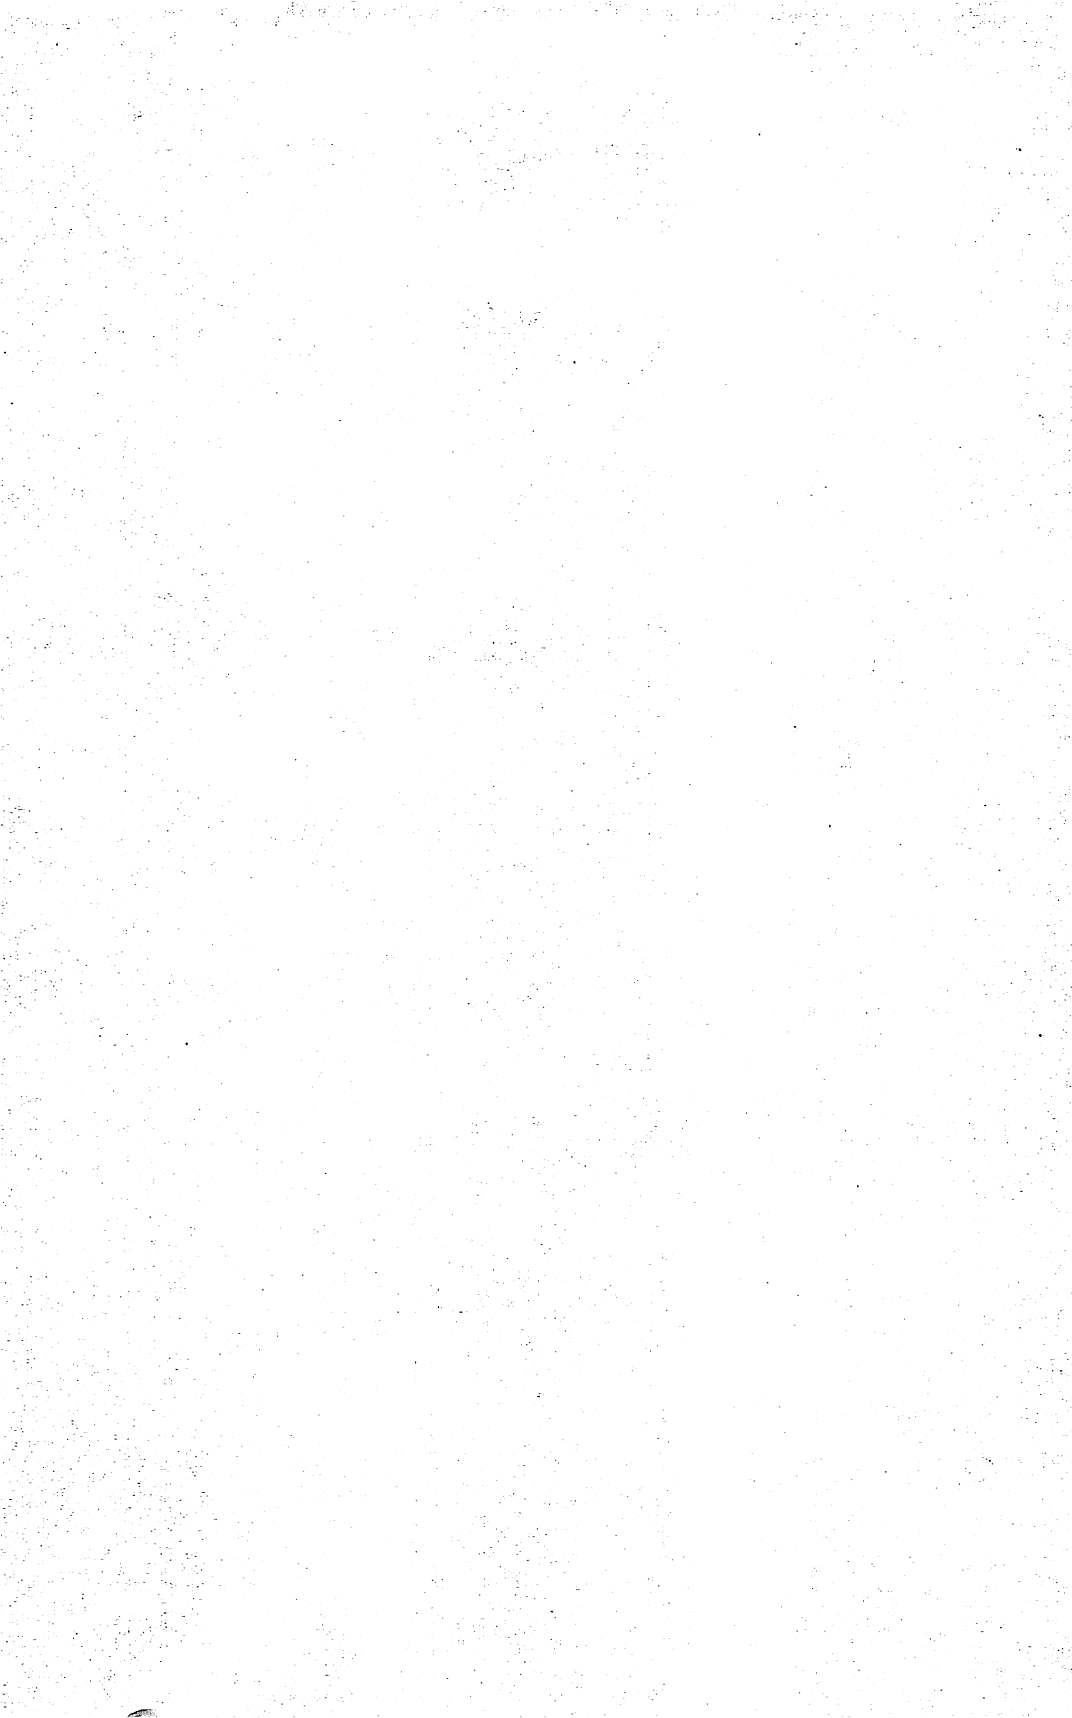

**DATASTORM**

DATASTORM TECHNOLOGIES, INC.

*P.O. Box 1471*

*Columbia, MO 65205*

*314.443.3282*

